



color: green, black
 pitch: 5.0/5.08mm
 certification: UL, CE, VDE, CQC
 Type: Female/ROHS

1. Material:


- Contact : Phosphor bronze
- Screws : M2.5 steel zinc plated
- Housing : PA66, UL94V-0

2. Electrical:


- Rated voltage : 300V
- rated current : 15A
- contact resistance : 20mΩ
- insulation resistance: 5000MΩ/1000V
- withstanding voltage: AC1500V/1Min

3. Mechanical:

- temp. range: -40°C...+105°C
- max soldering: +250°C for 5 sec.
- Torque: 0.5Nm(4.5IB.IN)
- strip length: 7-8mm

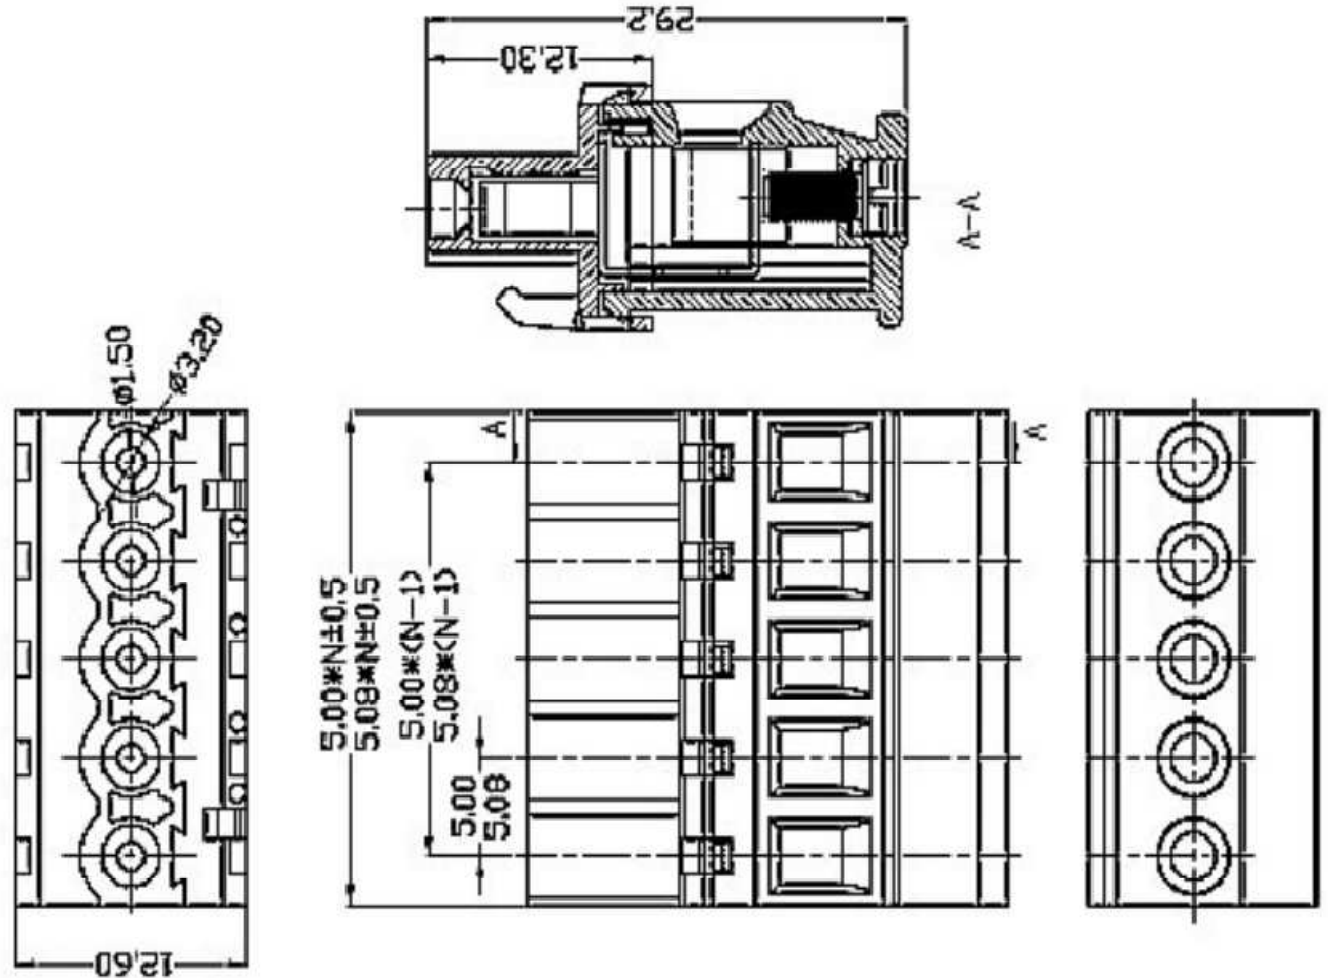

HOW TO ORDER

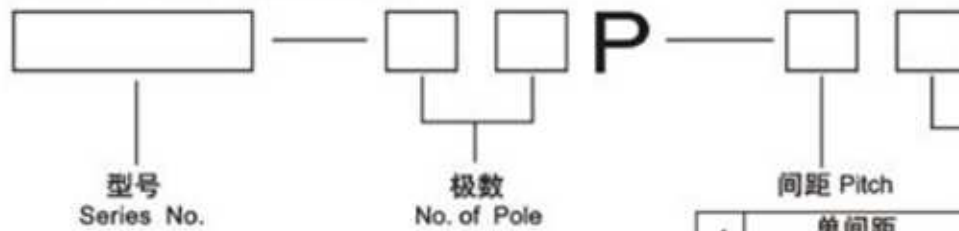

间距 Pitch		颜色 Color	
1	单间距	1	灰色 Grey
	Single pitch	2	蓝色 Blue
2	双间距	3	黑色 Black
	Double pitch	4	绿色 Green