
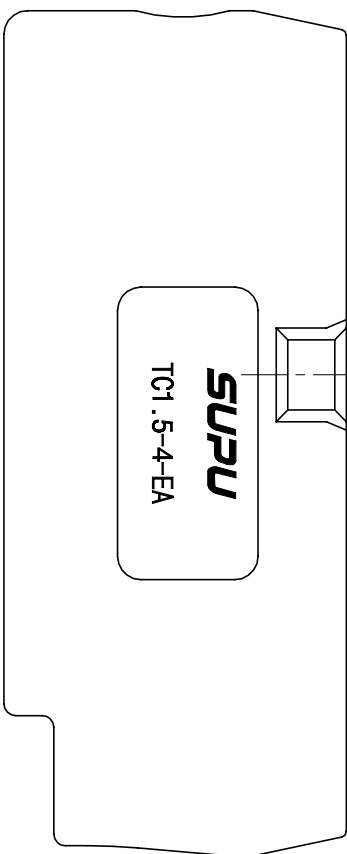

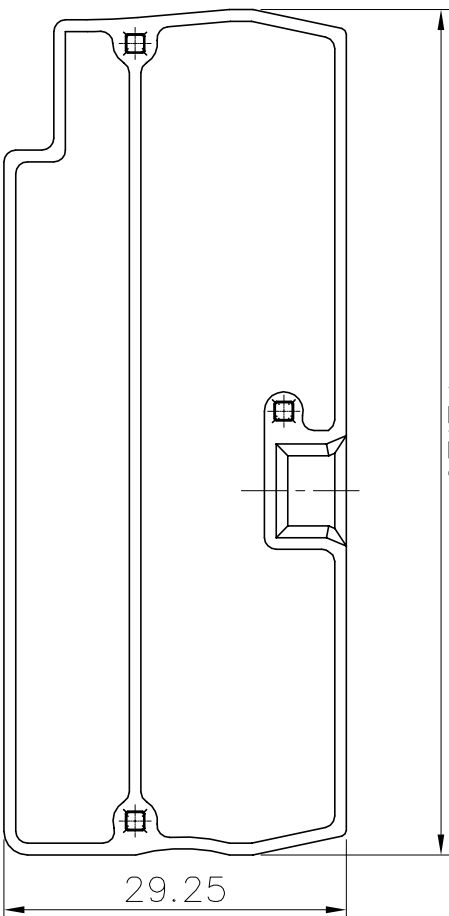


Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited.

未经允许禁止传输、复制、编辑该文档，以及利用其内容进行交流

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
1	DCN0006226	图纸更新	董方正	2020/1/07

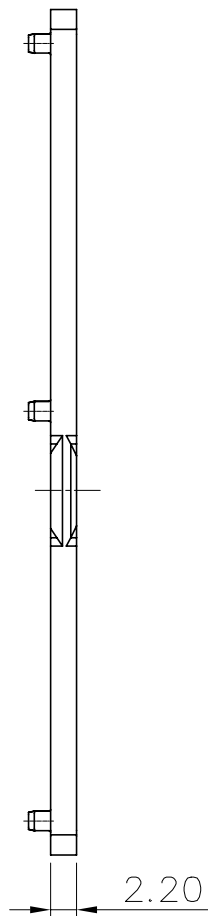

HOW TO ORDER:

TC1.5-4-XX-EA

Series No. Series No.
 Color: GY: Grey
 BU: Blue
 OG: Orange

- NOTES:
- Material: Insulator PA66 UL94 V-0
- General information:
1. Dimension shall be interpreted per ASME Y14.5-2009
 2. Operating temperature: -40°C~+105°C
 3. RoHS Compliance
 4. Undimensioned Tolerances:

Pitch	Range		In mm	Nominal Dimension		Range		-	/	D
	mm	mm		mm	mm	mm	mm			
6	Over	Over	10	Over	Over	Over	Over	0.1	/	10
10	TO	TO	24	TO	TO	TO	TO	<	/	30
15	±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°	

订货号 Order No.	TC1.5-4-XX-EA	名称 Name	TC系列密式弹簧 1.5mm ² 两进两出 接线端子端板	公差 Tolerance	表面 Surface
项目 Item	签字 Signature	图号 Drawing No.	PRM000990	阶段标记 Progress	版本 Revision
设计 Design	dfz	材料 Material	Notes	M	1
审核 Check	cw	物料号 Item No.	411514007	第1页/共1页	1 of 1
工艺 Process	-	物料号 Item No.	411514008		
标准化 Unit	-	物料号 Item No.	411514009		
批准 Approve	lw1	日期 Date	01/06/20 th		

1 2 3 4 5 6 7 8

A

B

C

D

E

F

NINGBO SUPU ELECTRONICS CO.,LTD.

SUPU 宁波睿普电子有限公司