
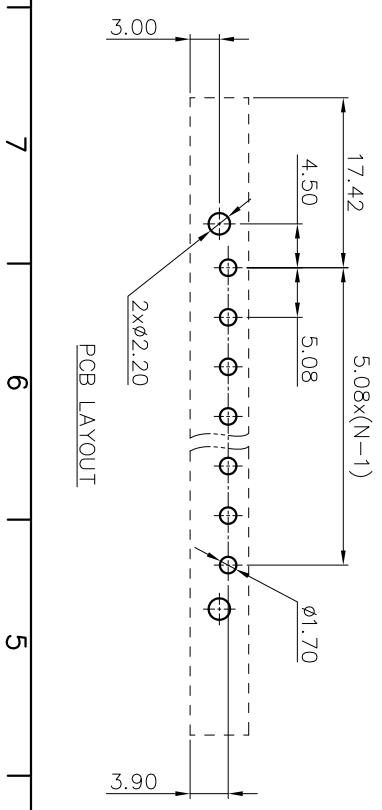
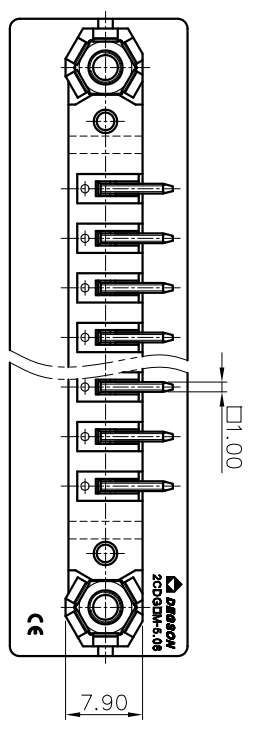
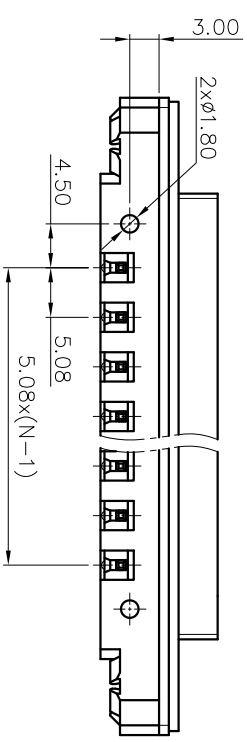
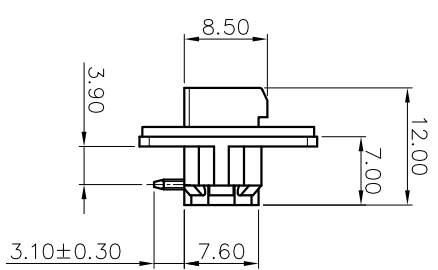


REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

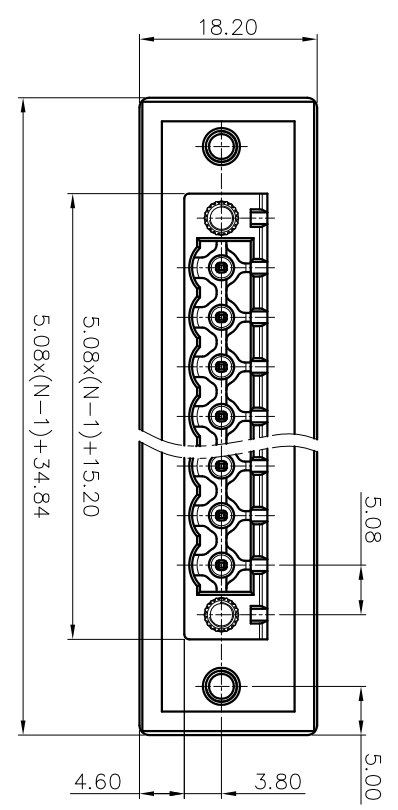

- NOTES1:
 UL Standard
 1. Rated voltage/current : 300V / 15A
 2. Withstanding voltage : AC1600V/1Min.
 IEC Standard
 1. Pollution degree 2 2 3
 2. Overvoltage category II III III
 3. Rate impulse voltage(KV) 4.0KV 4.0KV 4.0KV
 4. Rate voltage(V) 400V 320V 250V
 5. Rate current(A) 12A

- NOTES2:
 1. Dimension shall be interpreted per ASME Y14.5-2009
 2. Pitch : 5.08mm, Poles : N=02~22P
 3. Operating temperature: -40°C~+105°C
 4. Undimensioned tolerances:

Pitch range in mm	Nominal dimension			range		
	Over	Over	Over	Over	Over	Over
6	TO	TO	TO	30	60	100
10	TO	TO	TO	60	100	150
24	TO	TO	TO	100	150	150
30	TO	TO	TO	100	150	150
60	TO	TO	TO	100	150	150
100	TO	TO	TO	100	150	150
150	TO	TO	TO	100	150	150
±0.13±0.20±0.30±0.50±0.70	±1.00	±1.30	±2			

5. RoHS Compliance

2CDGRM - 5.08 - XXP - 1Y - 100A (H)
 (Series No.) (Pitch) (Poles) (Single Pitch) (Color) : 1: (Grey)
 2: (Blue)
 3: (Black)
 4: (Green)
 5: (Orange)
 6: (Red)
 7: (Transparent)
 8: (Yellow)
 9: (White)

DETACHED LISTS			
PART NO.:	/	NAME:	2CDGRM-5.08-XXP-1Y-100A(H)
APPD:	/	DRFT:	/
CHKD:	/	TITLE:	CUSTOMER DRAWING
THIRD ANGLE PROJECTION		DRAWING NO.:	/
DO NOT SCALE DRAWING		REV	DO
SCALE	1:1	SHEET	1/1

DEGSON 宁波高松电子有限公司
 NINGBO DEGSON ELECTRICAL CO., LTD