
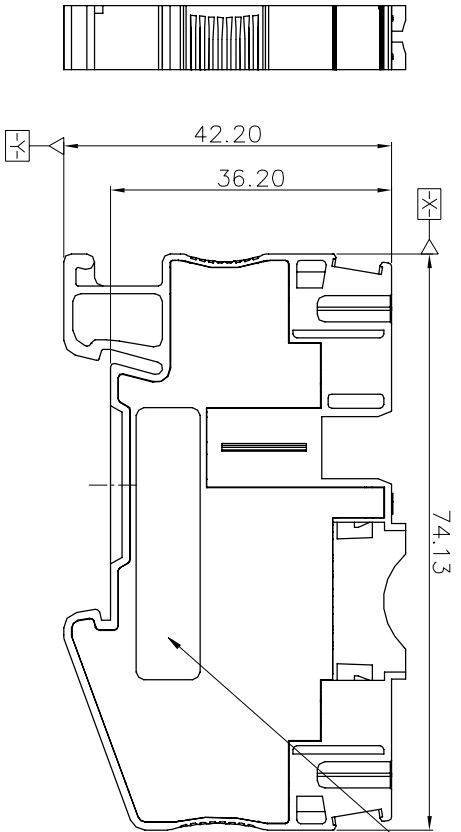




REVISION RECORD			
REV	ECN	DESCRIPTION	DATE

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited.

未经允许禁止传输、复制、编辑该文档，以及利用其内容进行交流

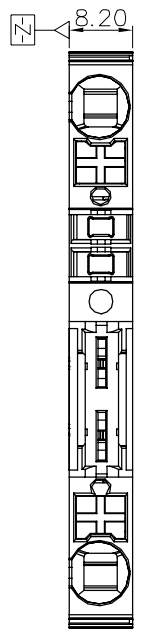

This area is blank and no printing is required

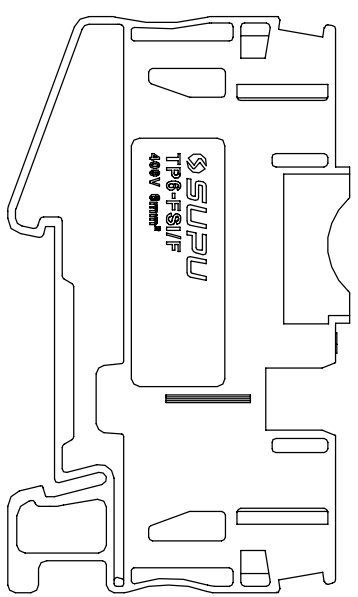

Fuse Type C, flat, max 2.2W

General information:
1. Dimension shall be interpreted per ASME Y14.5-2009

2. Stripping length: 10~12mm

3. Operating temperature: -40°C~+105°C

4. RoHS Compliance

5. Undimensioned Tolerances:

Pitch Range in mm		Nominal Dimension Range		Tolerance	
mm	mm	mm	mm	mm	mm
Over 6	Over 10	Over 30	Over 60	Over 100	Over 150
To 10	To 20	To 30	To 60	To 100	To 150
±0.15	±0.20	±0.30	±0.50	±0.70	±1.00
					±0.30

Connection method:
1. For Solid wire, peeling wire in right length, push down the wire.

2. For stranded wire, peeling wire in right length, push down the key & fix the wire, or wire ferruled and fix then.

Material:

Insulator	PA66	UL94 V-0
Conductor	Copper alloy	Sn Plated
Spring	Stainless steel	
Button	PA66	UL94 V-0

HOW TO ORDER:

TP6-FSI/F-XX

Series No. Color:
GN: Green; BK: Black
BU: Blue; GY: Grey
OG: Orange; RD: Red

普通用件登记 Common Part	0.5-6mm ²
原图号 Old Draw. No.	0.5-6mm ²
底图总号 Assembly No.	0.5-6mm ²

2. Rated Voltage/Current:

Surge voltage category	III
Pollution degree	3
Rated surge voltage(KV)	8
Rated voltage(V)	500
Rated current(A)	25 A (with 4 mm ² conductor cross section), 30 A (in separate arrangement with 4 mm ² conductor crosssection)

订货号 Order No.	TP6-FSI/F-XX	名称 Name	TP6系列6平方带保险丝端子 (注:无灯壳,无电阻)	未注公差 Tolerance	表面 Surface
项目 Item	签字 Signature	图号 Drawing No.	PRM003041	公差表 Tolerance Table	VDI21
设计 Design	LZT	材料 Material	Notes	版本号 Revision Number	重量 Weight
审核 Check	XJ	工艺 Process		M0	比例 Scale
批准 Approve	LWL	标准化 Unity			1:1
	03/12/22"	物料号 Item No.	411015205(黑色)		mm
	03/12/22"				

NINGBO SUPU ELECTRONICS CO.,LTD.