

尺寸 Size: 120mmx120mmx38mm

风量 Airflow: 130-166m³/hr
76-98CFM

重量 Weight: 480g

噪音 Noise: 39-48dBA

风叶 Impeller Material: PBT Thermoplastic Black, UL94-V0

外框 Frame: Aluminum Alloy



端子 Terminals: 0.5mm

引线 Lead Wire: AWG#22 UL 1569(Optional)


马达 Motor: Shaded Pole Induction Motor

温度范围 Operating Temperature: -10°C~+65°C

Model (型号)	Bearing System (轴承型式)	Voltage VAC (电压)	Freq. Hz (频率)	Current A (电流)	Power W (功率)	Speed RPM (转速)	Noise dBA (噪音)	Air Flow (风量)		Phase (相数)	Capacitor (电容)
								M3/hr	CFM		
G12038HA,S	Sleeve	100/125	50/60	0.4/0.33	23/30	2600/3000	43/48	160/166	93/98	1	/
G12038HA ₂ S		200/240	50/60	0.15/0.12	21/18	2600/3000	43/48	160/166	93/98	1	/
G12038HA ₃ S		380/420	50/60	0.1	21	2600/3000	43/48	160/166	93/98	1	/
G12038HA,B	Ball	100/125	50/60	0.4/0.33	23/30	2600/3000	43/48	160/166	93/98	1	/
G12038HA ₂ B		200/240	50/60	0.15/0.12	21/18	2600/3000	43/48	160/166	93/98	1	/
G12038HA ₃ B		380/420	50/60	0.1	21	2600/3000	43/48	160/166	93/98	1	/
G12038MA,S	Sleeve	100/125	50/60	0.22	19	2200/2600	39/44	130/160	76/94	1	/
G12038MA ₂ S		200/240	50/60	0.11	19	2200/2600	39/44	130/160	76/94	1	/
G12038MA,B	Ball	100/125	50/60	0.22	19	2200/2600	39/44	130/160	76/94	1	/
G12038MA ₂ B		200/240	50/60	0.11	19	2200/2600	39/44	130/160	76/94	1	/

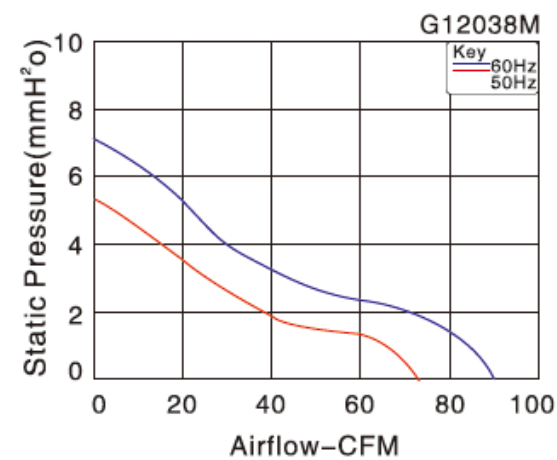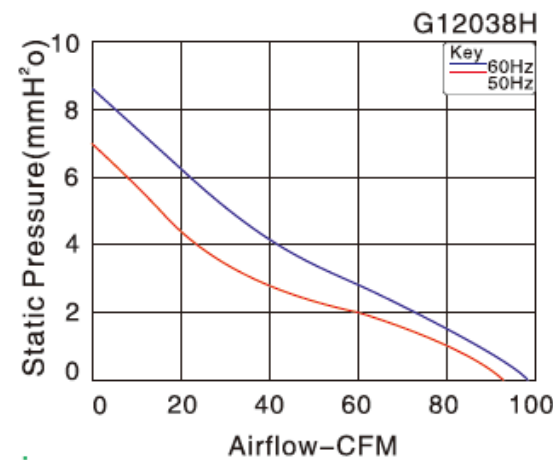

Fan Accessories

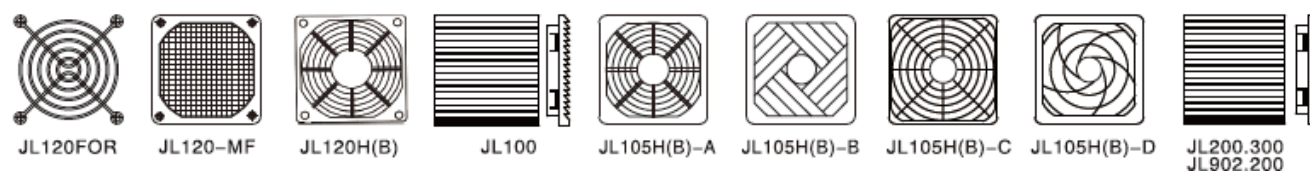

JULONG MOTOR
AC/DC FANS COOLING FANS



UL
E248719



CE