


Technical Data Sheet

**450-3326 Solder Mount Socket,
For .060 (1,52) to .062 (1,57) Diameter Pins**
Recommended mounting hole .102 (2,59) ± .002 (0,05), #38 drill

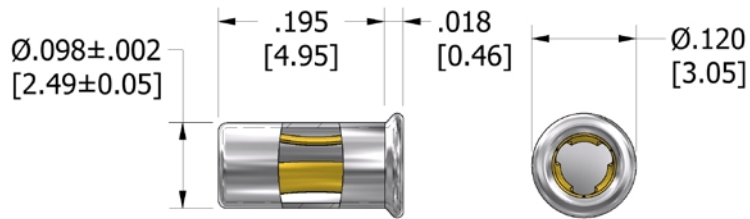

Min hole depth .200 (5,08)

How to order code

450-3326-01-XX-00

Basic Part No XX = Finish

| MATERIALS | | | | |
|------------------|------------------|---------------------|---------------------|---------------------|
| Component | Material | Finish (-03) | Finish (-04) | Finish (-06) |
| Body | Brass | Gold over Nickel | Electro Tin | Electro Tin |
| Spring | Beryllium copper | Gold over Nickel | Electro Tin | Gold over Nickel |



Dimensions in inches [mm]

Tolerance unless otherwise stated ± 0.005 [0.13]