
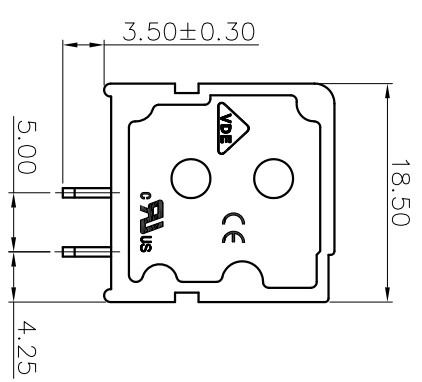
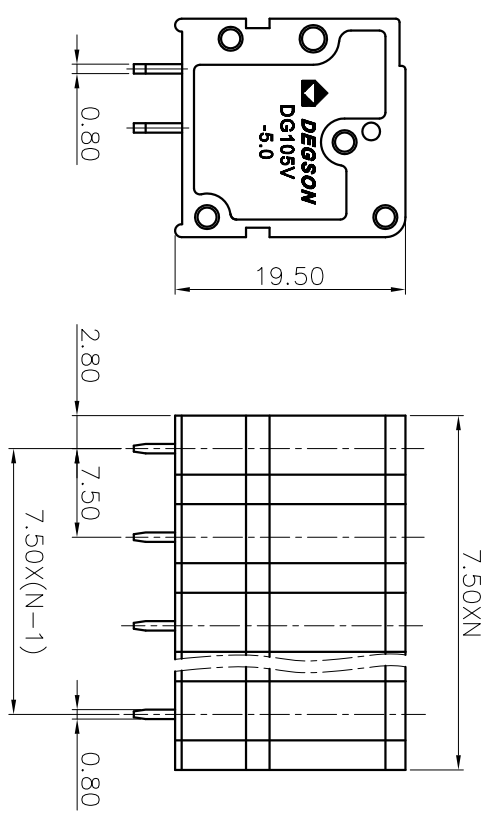


REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

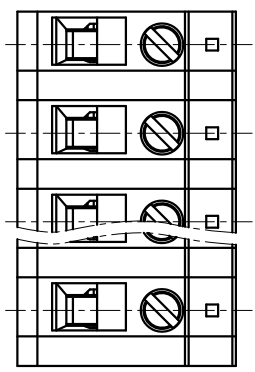

Pitch	range	in mm	in mm	Nominal dimension	range	mm	in	mm	in		
TO	Over	6	TO	Over	30	TO	Over	60	TO	Over	100
6	TO	10	10	TO	60	100	TO	150	150	TO	150
10	TO	24	30	TO	80	100	TO	150	150	TO	150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±1.30	±2	±2	±2

7. RoHS Compliance

NOTES:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 7.5mm, Poles : N=01~XXP
3. Stripping length : 12~13mm
4. Withstanding voltage : AC2000V/1Min
5. Operating temperature: -40°C~+105°C
6. Undimensioned tolerances:


IEC Standard

1. Rated voltage/current : 250V / 24A
2. Torque value : M2.5 , 0.4N·m
3. Wire range : 24~14AWG

NOTES1:

UL Standard

1. Rated voltage/current : 300V / 20A
2. Torque value : M2.5 , 3.54Lb.in
3. Wire range : 24~14AWG

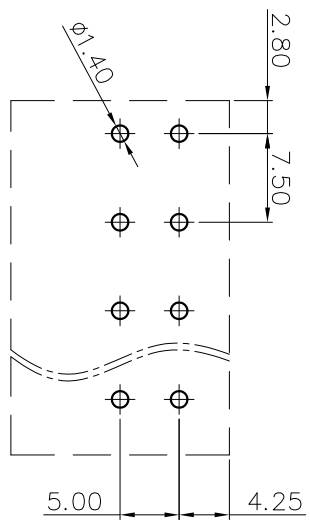

DG105V - Z.5 - XXP - 1Y - 00A (H)  
 (Series No.) (Pitch) (Poles) (Single Pitch) (Color): 1.(Grey)2.(Blue)3.(Black)  
 4.(Green)5.(Orange)6.(Red)  
 7.(Transparent)8.(Yellow)  
 9.(White)

DETACHED LISTS			
PART NO.:	/	NAME:	NINGBO DEGSON ELECTRICAL CO., LTD
APPD:	/	NAME:	DG105V-Z.5-XXP-1Y-00A(H)
CHKD:	/	TITLE:	CUSTOMER DRAWING
DRFT:	/	DRAWING NO.:	/
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	SCALE
		SCALE	1:1

A 8 7 6 5 4 3 2 1