
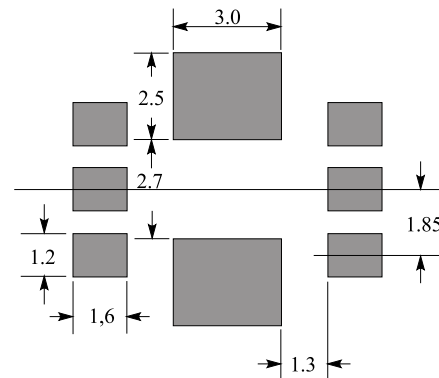
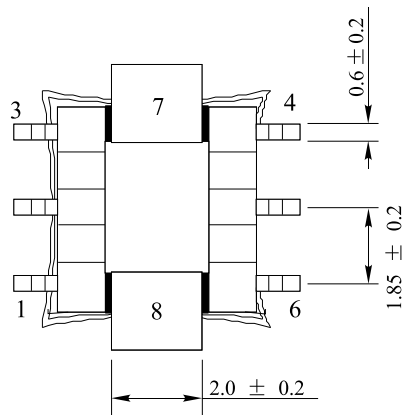
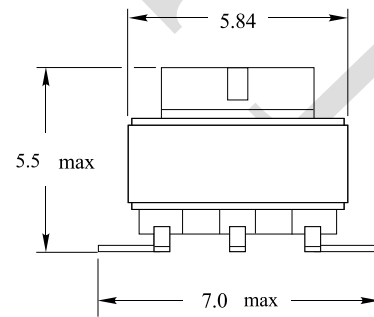



Rev.	Description	Date
A0	New release	2022.07.15

1. PHYSICAL CHARACTERISTICS (mm)

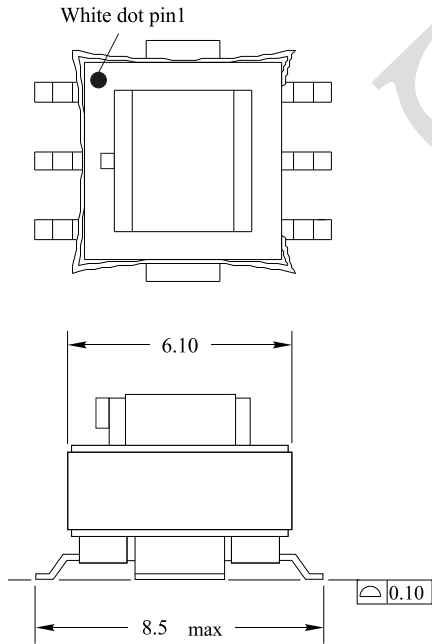

Recommended Land Pattern

2. ELECTRONICAL SCHEMATIC

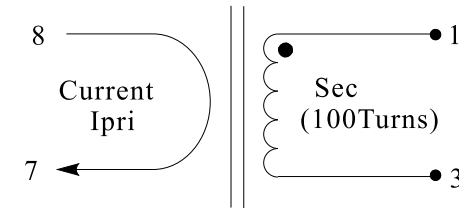

3. ELECTRONICAL SPECIFICATIONS

Turns ratio: 1:100 ± 1%

OCL: 2.0mH Min@10KHz,0.1V

Sec DCR: 5.5 Ω Max

Pri DCR: 0.6m Ω Max

Rated current: 20A (Temp. rise 40°C Max)

Operating Temperature: -40°C ~ +125°C

Hipot: 1000VAC, Pri to Sec

Test Instrument:

L: HP4284A

RDC: HM2540

NAME:	Current transformer		
CUSTOMER P/N:	B82801B0205A100	DATE:	2022-07-15
SHINHOM P/N:	ACSTE5100	REV: A0	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	



SHINHOM
SHAANXISHINHOM ENTERPRISE CO LTD

The Document property belong to SHINHOM & is not allowed to be duplicated without authorization