





# 宁波速普电子有限公司

## NINGBO SUPU ELECTRONICS.CO.,LTD

### 产品规格书

### Product Specification

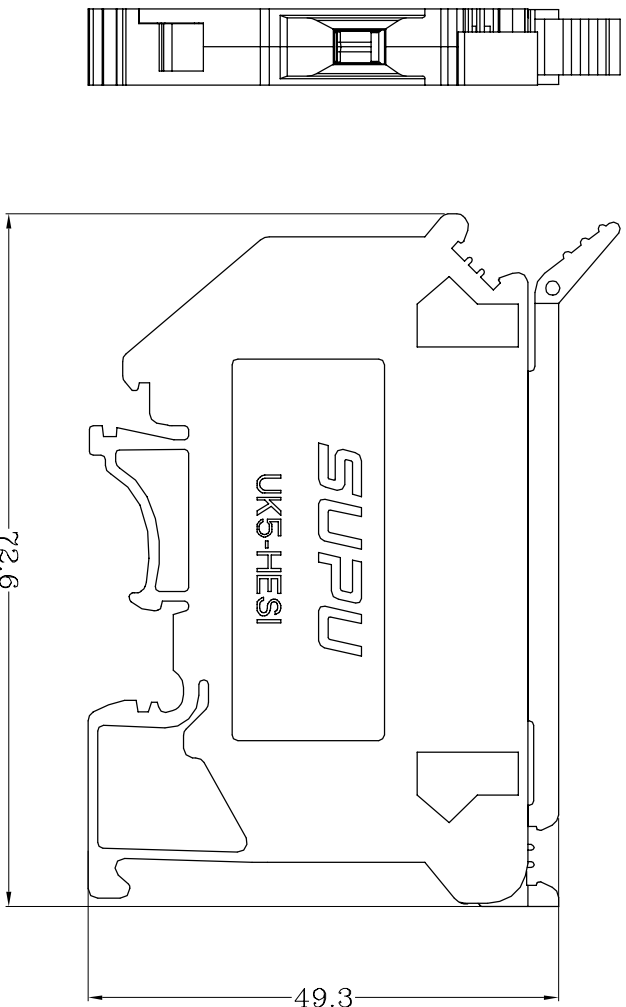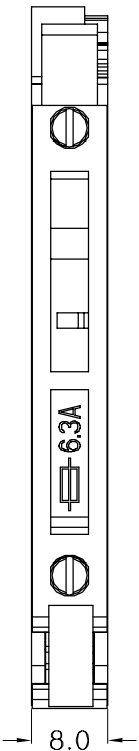

IEC 额定数据 / IEC Rated data	
接线范围 / Wire range	0.2-4mm <sup>2</sup>
单股导线 / Solid	0.2-4mm <sup>2</sup>
软导线 / Stranded	0.2-4mm <sup>2</sup>
带端头软导线 / Stranded with ferrules without plastic sleeve	0.25-4mm <sup>2</sup>
带预绝缘端头软导线 / Stranded with ferrules with plastic sleeve	0.25-4mm <sup>2</sup>
剥线长度 / Strip length	8-9mm
额定电压 / Rated voltage	800V
额定电流 / Rated current	6.3A
耐电压 / Rated surge voltage	6KV
污染等级 / Pollution level	3
过电压等级 / Overvoltage category	III
UL 额定数据 / UL Rated data	B C D
额定电流 / Rated current	12A 12A
额定电压 / Rated voltage	600V 600V
接线范围 / Wire range	26-10AWG

其他信息 / Other information	
塑件 / Housing	PA66
触点材料 / Contact	铜合金 / Copper alloy
镀层 / Coating	镍 / Nickel
阻燃等级 / Flame retardant rating	V0
储存及运输环境温度 / Storage ambient temperature	-40°C - +85°C
使用环境温度 / Usage ambient temperature	-25°C - +70°C
螺钉类型 / Screw-thread	M3
扭矩 / Tightening torque	0.6-0.8 Nm
导轨尺寸 / Rails Size	SP35X7.5/SP35X15/SP32X7.5
保险丝 / Fuse	G/5×20/5×25/5×30

### 认证 / Approval



单位 / Unit	Rev.	Name
mm	01	UK5/HESI (带保险管) 轨装螺钉接线端子 UK5/HESI (with insurance tube) Rail-mounted terminal blocks with screw clamp

### 订货信息 / Order Info

Part Number	颜色 / Color	未标注公差参照GB/T14186
305972	灰色 / Gray	基本尺寸 公差
305971	黑色 / Black	0-3 ±0.08
		3-6 ±0.09
		6-10 ±0.10
		10-14 ±0.12
		14-18 ±0.14
		18-24 ±0.16
		24-30 ±0.18
		30-40 ±0.21
		40-50 ±0.24
		50-65 ±0.28
		65-80 ±0.32
		80-100 ±0.36
		100-120 ±0.41
		120-140 ±0.46