

Features

EI 42 Series




Power: **5.0VA - 9.0VA**




Features


- Non Short-circuit Proof
- Vacuum Filling
- Split Bobbin Design & Winding
- Temperature Class: ta50°C/B, ta70°C/B
- Frequency 50/60Hz
- Dielectric Strength 4200Vrms
- 100% Tested Production
- UL file No.E352173
- According to EN61558-1/EN61558-2-6,UL5085-1/-3

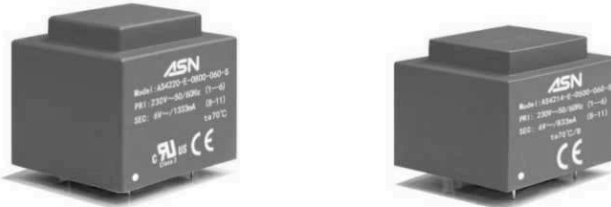

Outline Dimensions

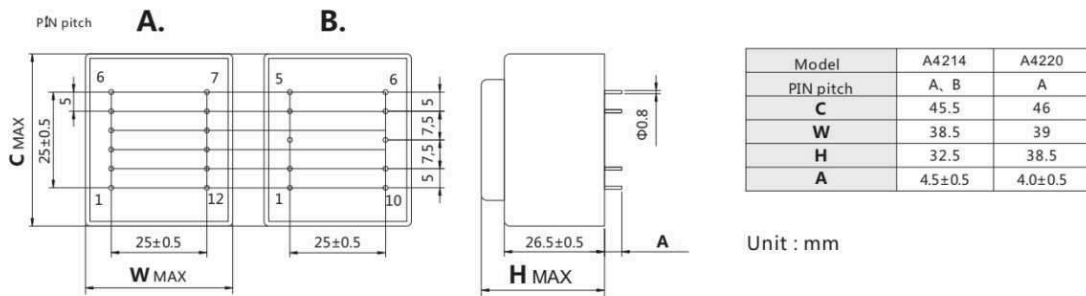

Electrical Schematic

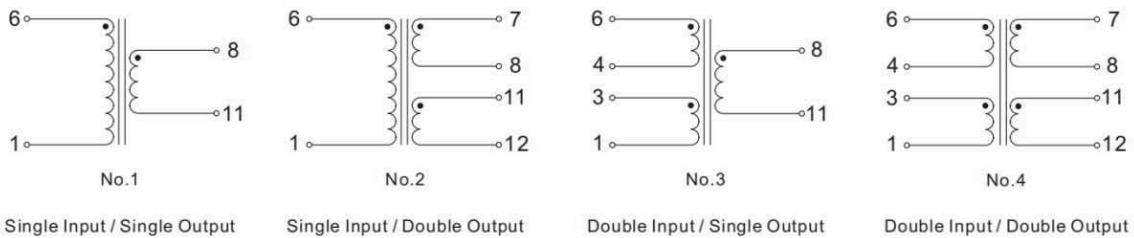

Product Height Specification

Model	Temperature Class		High(mm) Max	weight (g)	Packaging Unit (pcs)
	ta70°C/B	ta50°C/B			
A4214-X-XXXX-XXX-X	5.0VA	6.0VA	32.5	200	84
A4220-X-XXXX-XXX-X	8.0VA	9.0VA	38.5	260	63

Product Parameter

PART NO	Primary	[V] No-Load Voltage	[V] Secondary	[V/mA] Pin	Schematic No.	Temperature Class
AS4214-E-0600-060-S	230	8.4	6/1000	1+6/8+11	1	ta50°C/B
AS4214-E-0600-090-S	230	12.5	9/667	1+6/8+11	1	ta50°C/B
AS4214-E-0600-120-S	230	16.7	12/500	1+6/8+11	1	ta50°C/B
AS4214-E-0600-150-S	230	20.8	15/400	1+6/8+11	1	ta50°C/B
AS4214-E-0600-180-S	230	25.0	18/333	1+6/8+11	1	ta50°C/B
AS4214-E-0600-240-S	230	33.3	24/250	1+6/8+11	1	ta50°C/B
AS4214-E-0600-060-D	230	2x8.4	2x6/500	1+6/7+8-11+12	2	ta50°C/B
AS4214-E-0600-075-D	230	2x10.4	2x7.5/400	1+6/7+8-11+12	2	ta50°C/B
AS4214-E-0600-090-D	230	2x12.5	2x9/333	1+6/7+8-11+12	2	ta50°C/B
AS4214-E-0600-120-D	230	2x16.7	2x12/250	1+6/7+8-11+12	2	ta50°C/B
AS4214-E-0600-150-D	230	2x20.8	2x15/200	1+6/7+8-11+12	2	ta50°C/B
AS4214-E-0600-180-D	230	2x25.0	2x18/167	1+6/7+8-11+12	2	ta50°C/B
AS4214-E-0600-240-D	230	2x33.3	2x24/125	1+6/7+8-11+12	2	ta50°C/B
AS4214-U-0600-060-S	115	8.4	6/1000	1+6/8+11	1	ta50°C/B
AS4214-U-0600-090-S	115	12.5	9/667	1+6/8+11	1	ta50°C/B
AS4214-U-0600-120-S	115	16.7	12/500	1+6/8+11	1	ta50°C/B
AS4214-U-0600-150-S	115	20.8	15/400	1+6/8+11	1	ta50°C/B
AS4214-U-0600-180-S	115	25.0	18/333	1+6/8+11	1	ta50°C/B
AS4214-U-0600-240-S	115	33.3	24/250	1+6/8+11	1	ta50°C/B
AS4214-U-0600-060-D	115	2x8.4	2x6/500	1+6/7+8-11+12	2	ta50°C/B
AS4214-U-0600-075-D	115	2x10.4	2x7.5/400	1+6/7+8-11+12	2	ta50°C/B
AS4214-U-0600-090-D	115	2x12.5	2x9/333	1+6/7+8-11+12	2	ta50°C/B
AS4214-U-0600-120-D	115	2x16.7	2x12/250	1+6/7+8-11+12	2	ta50°C/B
AS4214-U-0600-150-D	115	2x20.8	2x15/200	1+6/7+8-11+12	2	ta50°C/B
AS4214-U-0600-180-D	115	2x25.0	2x18/167	1+6/7+8-11+12	2	ta50°C/B
AS4214-U-0600-240-D	115	2x33.3	2x24/125	1+6/7+8-11+12	2	ta50°C/B

AS4214-U2-0600-060-S 2x115	8.4	6/1000	1+3- 4+6/8+11	3	ta50°C/B
AS4214-U2-0600-090-S 2x115	12.5	9/667	1+3- 4+6/8+11	3	ta50°C/B
AS4214-U2-0600-120-S 2x115	16.7	12/500	1+3- 4+6/8+11	3	ta50°C/B
AS4214-U2-0600-150-S 2x115	20.8	15/400	1+3- 4+6/8+11	3	ta50°C/B
AS4214-U2-0600-180-S 2x115	25.0	18/333	1+3- 4+6/8+11	3	ta50°C/B
AS4214-U2-0600-240-S 2x115	33.3	24/250	1+3- 4+6/8+11	3	ta50°C/B
AS4214-U2-0600-060-D 2x115	2x8.4	2x6/500	1+3- 4+6/7+8- 11+12	4	ta50°C/B
AS4214-U2-0600-090-D 2x115	2x12.5	2x9/333	1+3- 4+6/7+8- 11+12	4	ta50°C/B
AS4214-U2-0600-120-D 2x115	2x16.7	2x12/250	1+3- 4+6/7+8- 11+12	4	ta50°C/B
AS4214-U2-0600-150-D 2x115	2x20.8	2x15/200	1+3- 4+6/7+8- 11+12	4	ta50°C/B
AS4214-U2-0600-180-D 2x115	2x25.0	2x18/167	1+3- 4+6/7+8- 11+12	4	ta50°C/B
AS4214-U2-0600-240-D 2x115	2x33.3	2x24/125	1+3- 4+6/7+8- 11+12	4	ta50°C/B