




GSM Antenna Specification

(Model: BY-GSM-05)

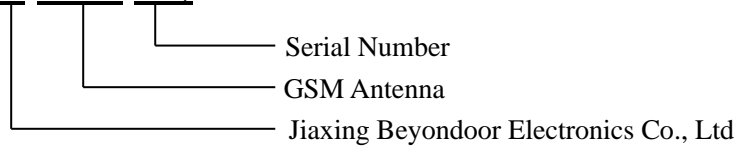

(I) Product Overview

Frequency (MHz) : 824-960/1710-1990

Bandwidth (MHz) : 136/280

VSWR \leq 1.5

Gain (dBi) : 3.5

Max Input power (W) : 60

Input Impedance (Ω) : 50

Polarization: Vertical

Size (mm) : 115 \times 22 \times 4

Cable Length (m) : 2,3,5 etc.

Cable Type: RG174

Connector : SMA/SMB/SMC/BNC/FME/TNC/MCX/MMCX etc.

Mounting : Adhesive

Working Temp: -40 $^{\circ}$ C~+85 $^{\circ}$ C

Storage Temp: -45 $^{\circ}$ C~+100 $^{\circ}$ C

Vibration: Sine sweep 1g(0-p)10~50~10Hz each axis

(II) Characteristic curve

JIAXING BEYONDOOR ELECTRONICS CO.,LTD

Address: #101, Weiyi West Road, Dongzha Economic Zone ,Jiaxing 314000,Zhejiang,China



<http://www.beyondoor.com>

Tel:+86-573-82127009


Fax:+86-573-82052070

E-MAIL: sales@beyondoor.com or firstgps@hotmail.com

SKYPE NAME:beyondoorgps

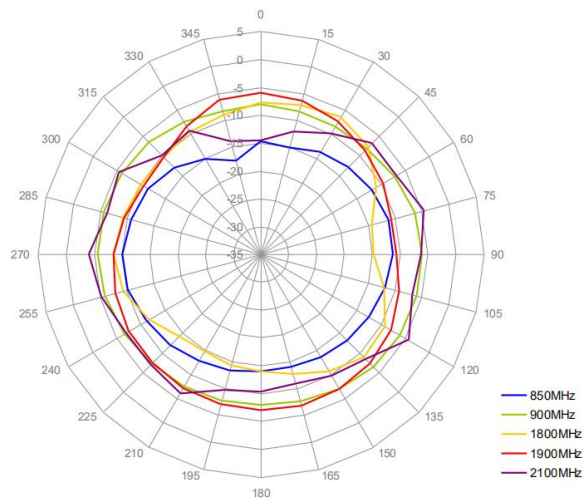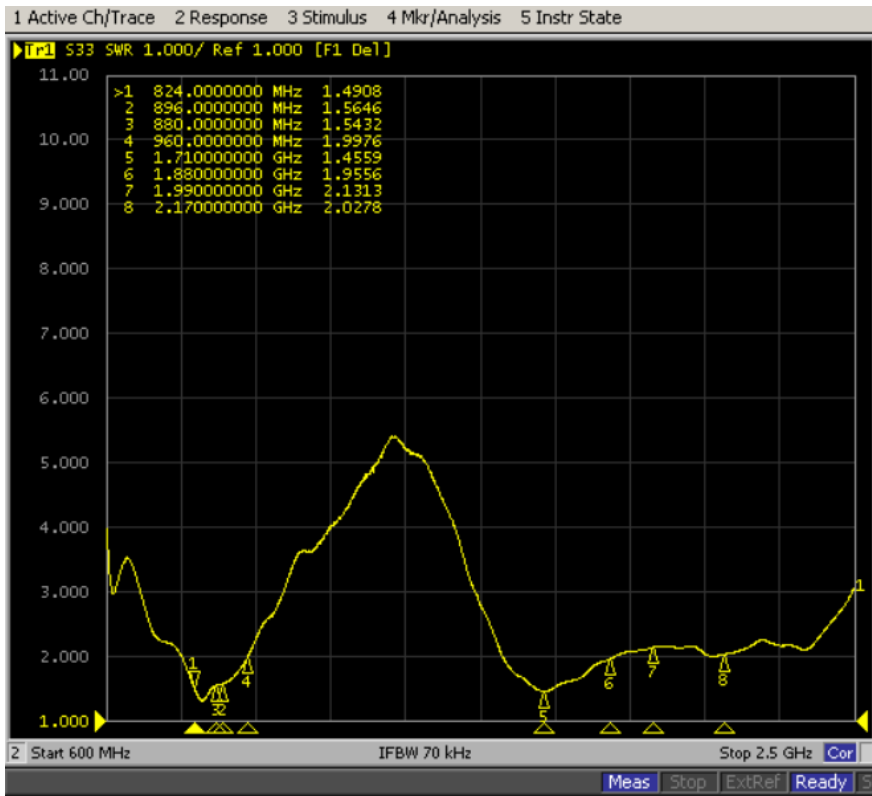

Horizontal Pattern

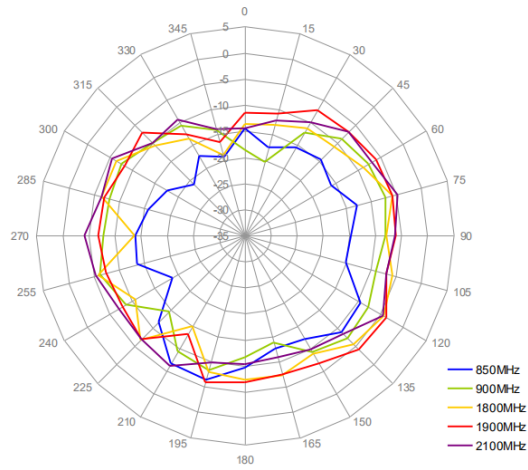

Vertical Pattern

(III) Mechanical

