

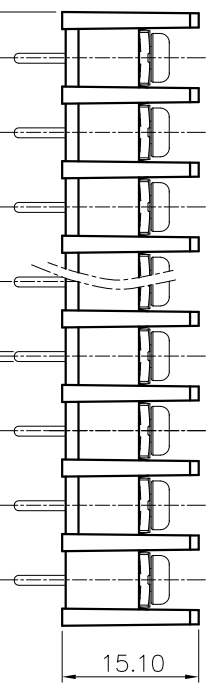




REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

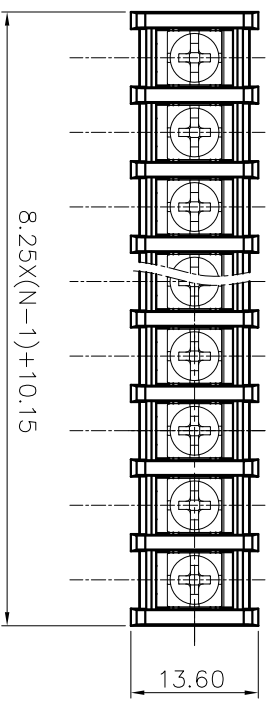

- NOTES1:
- UL Standard
 - Rated voltage/current : 300V / 20A
 - Torque value : M3 , 4.43Nl.in
 - Wire range : 22~12AWG
- NOTES2:
- Dimension shall be interpreted per ASME Y14.5-2009
 - Pitch : 8.25mm, Poles : N=02~26P
 - Withstanding voltage : AC1600V/1min
 - Operating temperature: -40°C~+105°C
 - Undimensioned tolerances:

Pitch range	mm	in	mm	in	mm	in	mm	in
Over	6	10	30	60	100	150	0.1	1/10
TO	10	24	50	100	150	150	<	<
TO	10	24	30	60	100	150	±0.15	±0.20
TO	10	24	30	60	100	150	±0.30	±0.50
TO	10	24	30	60	100	150	±0.70	±1.00
TO	10	24	30	60	100	150	±1.30	±2

6. RoHS Compliance

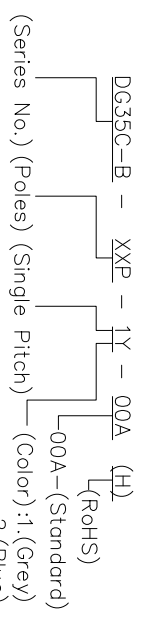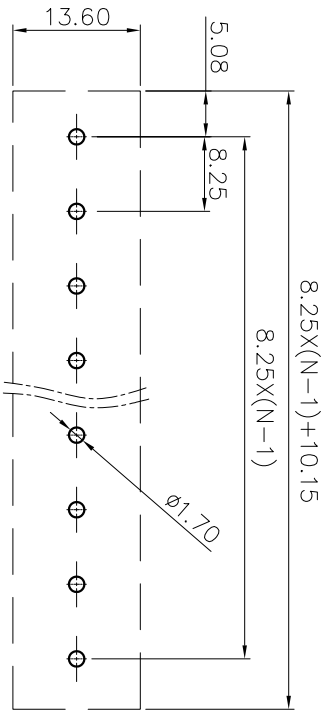

- 1.(Grey)
- 2.(Blue)
- 3.(Black)
- 4.(Green)
- 5.(Orange)
- 6.(Red)
- 7.(Transparent)
- 8.(Yellow)
- 9.(White)

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON NINGBO DEGSON ELECTRICAL CO.,LTD 宁波高松电子有限公司
APPD:	/	TITLE:	CUSTOMER DRAWING
CHKD:	/	DRAWING NO.:	/
DRFT:	/	REV	DO
THIRD ANGLE PROJECTION		SHEET	1/1
		SCALE	1:1