


SWITCH/LED CIRCUIT


MATERIAL AND FINISH AS BELOW

A	Housing	LCP UL94V-0, Color:Black	E
B	Contact	Phosphor Bronze T=0.15, Contact Area: Gold Plated	F
C	Shell	Stainless Steel, Solder Tail:Gold Plated	G
D			H

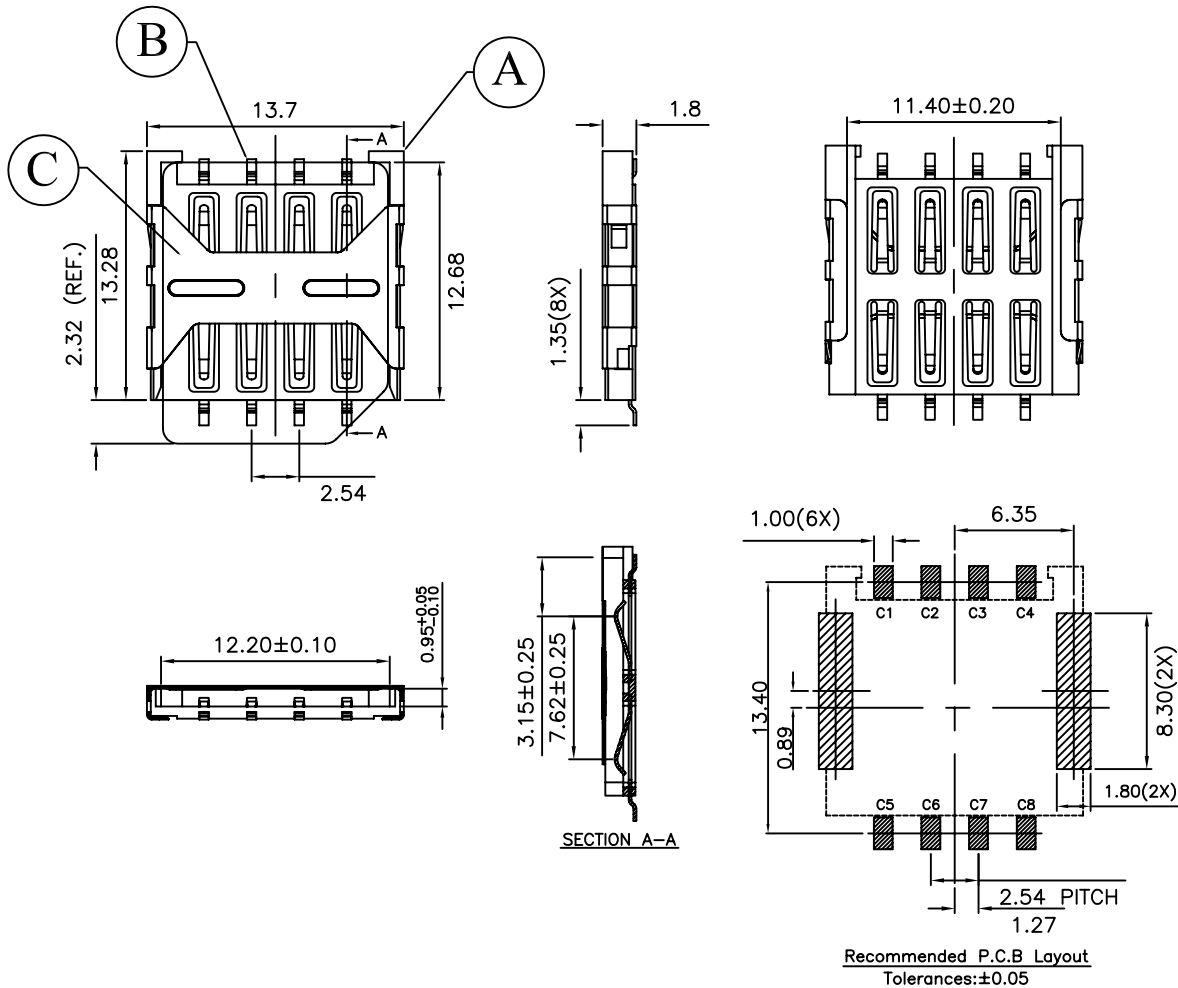

SPECIFICATION:

- 1. ELECTRICAL**
 - 1.1 Current Rating: 0.5A
 - 1.2 Voltage Rating: 5VDC
 - 1.3 Contact Resistance: 100mΩ
 - 1.4 Insulation Resistance: 100MΩ
 - 1.5 Dielectric Withstanding Voltage: 100VAC for 1 minute
- 2. MECHANICAL**
 - 2.1 Durability: 5000 Cycle
 - 2.2 Contact Force : per pin 0.43g
- 3. ENVIRONMENTAL**
 - 3.1 Operating temperature range: -40°C to +85°C
 - 3.2 Storage temperature range: -40°C to +85°C
- 4. SOLDER ABILITY**
 - 4.1 Recommended IR Reflow Temperature: 260°C



Vcc	RST	CLK	NA	GND	Vpp	I/O	NA				
C1	C2	C3	C4	C5	C6	C7	C8				
PIN ASSIGNMENT											
115I-BEAA			Micro SIM Socket 8Pin SMD Type,15u" Gold Plating								
PRODUCT NO.			DESCRIPTION								

UNLESS OTHERWISE SPECIFIED TOLERANCE		
ANGLES	ANG.	±5°
LINEAR	0.	±0.3
	0.0	±0.25
	0.00	±0.20
SCALE	AS SHOWN	UNIT: mm
DRAWN	Willis	2011/11/02
CHECKED	Angel	2011/11/02
APPROVED	Ken	2011/11/02



3	Revise:										
2	Revise:										
1	Revise:										
REV.	DESCRIPTION	DATE	REV.	DESCRIPTION	DATE	SIZE	REV.	FILE NAME			
1						A4	1.0	115I-BEAA_B_1			