
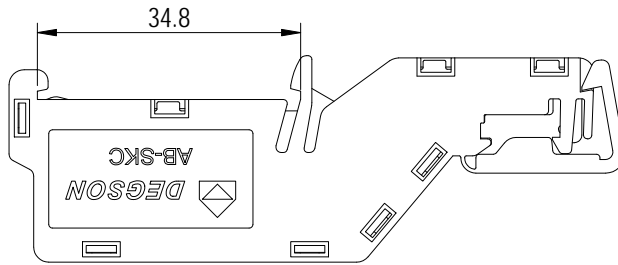
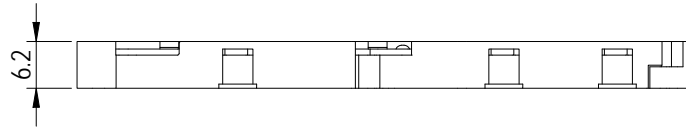


未注公差/General tolerances (mm)													0.1/10 ±2'
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

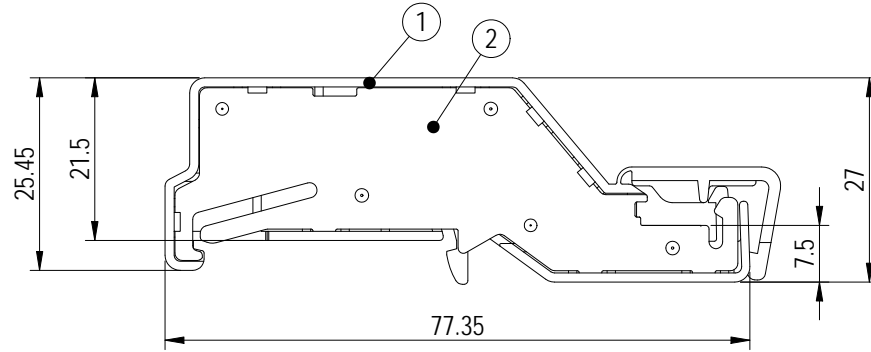

ITEM	NAME OF PART	MATERIAL	NOTES
2	Current carrier	Copper alloy	Sn plated
1	Housing	PA66	UL94V-0

间距/Pitch (mm)/线数范围/Poles	6.2/01P
使用温度范围/Operating temperature (°C)	-40~+105
符合RoHS环保要求/Conform to RoHS	Yes

DEGSON		MATERIAL:	SURFACE/COLOR:			
APPD: 彭敏 2023.02.20		MAT NO./REV: 11060000737-1 / 00.01		MAT STATUS: 批量		
CHKD: 高卫国 2023.02.20		NAME: AB-SKC				
DRFT: 谢晓栋 2023.02.20		DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
REV 00		200101541	CUSTOMER DRAWING	已发布	1:1	1/1

REV	ECN	DESCRIPTION	DRFT	DATE
00			谢晓栋	2023.02.20

Transfer or duplication of this document as well as the utilization or communication of its content is prohibited unless authorized in writing by DEGSON. All rights reserved for patent, utility model or design registrations. 除特别声明外，未经许可，不得复制或传播。本公司保留对涉及发明、实用新型及外观设计的所有权利。

A

B

C

D