


Push-in terminal block -UJ6-2.5/2 × 2-421465



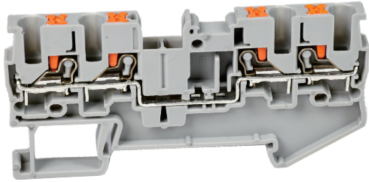

Push-in terminal block , rated voltage:800V , Max. operating current:24A, connection method : spring connection , number of connections : 2 , crimping range : 0.2mm<sup>2</sup> -4mm<sup>2</sup> , AWG : 24-12 , thickness:5.2mm , height: 29.2mm , color : grey , mounting type : TH35-7.5、 TH35-15

## Product parameter

Parameter	Data
Packing unit (PCS)	90
NW per piece(g)	8.3
Layers	1
Number of connections	2
Rated cross section(mm <sup>2</sup> )	2.5
Color	grey
Insulation material	PA
Flame retardant grade	V0
Rated voltage(V)	800
Rated current(A)	24
Temperature of insulation material	-40 ~ +125
Wire feed	Above the terminal

## Product certification

Parameter	Data
Certification logo	
Certification logo	
Certification logo	

Parameter	Data
	<b>RoHS</b>

## Technical data

Parameter	Data
Connection Method	Spring connection
Stripping length(mm)	13
Solid conductors(mm <sup>2</sup> )	0.2-4
Solid conductors AWG	24-12
Stranded conductors(mm <sup>2</sup> )	0.2-2.5
Stranded conductors AWG	24-14
Connection in acc. with standard	IEC 60947-7-1
Operating temperature ( )	-40 ~ +105
Ambient temperature (storage/transportation) ( )	-25 ~ +55
Relative humidity	30% ~ 90%

## Dimension

Parameter	Data
Width(mm)	72.2
Thickness(mm)	5.2
Height(mm)	29.2

## Business data

Parameter	Data
End cover -UJ6-2.5/2 × 2G - 422110-Packing unit (PCS)	100
End cover- UJ6-2.5/2 × 2G - 422110-NW per piece(g)	2.2
End cover- UJ6-2.5/2 × 2G - 422110-Width(mm)	72.1
End cover- UJ6-2.5/2 × 2G - 422110-Thickness(mm)	2.2
End cover - UJ6-2.5/2 × 2G - 422110-Height(mm)	29