

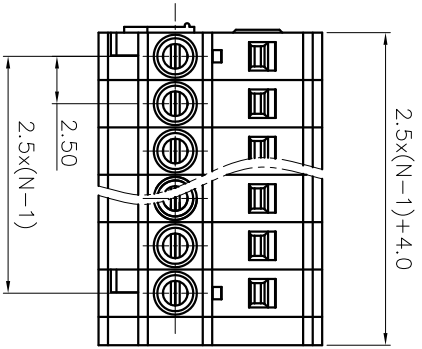
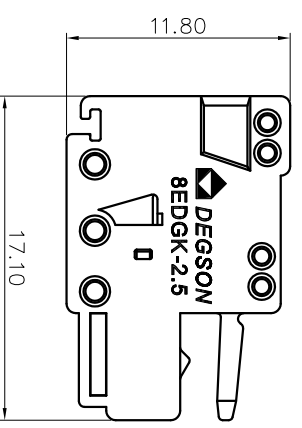



REV	ECN	DESCRIPTION	DRFT	DATE

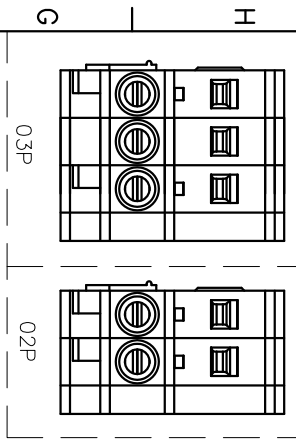

NOTES1:


- UL Standard
- 1. Rated voltage/current : 150V / 4A
- 2. Withstanding voltage : AC1300V/1Min.
- 3. Wire range : 28~20AWG

IEC Standard

1. Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	130V
Rate Current(A)	6A

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 2.50mm, Poles : N=02~24P
- 3. Stripping length : 5~6mm
- 4. Operating temperature: -40°C~+105°C
- 5. Undimensioned tolerances:




Pitch	range	in	Nominal dimension	range
mm		in	mm	
Over	6	Over	30	Over
To	10	To	60	Over
6	10	10	100	Over
6	24	30	150	Over
		60	100	Over
		80	150	Over
		100	150	Over
		±0.15	±0.20	±0.30
		±0.30	±0.50	±0.70
		±1.00	±1.00	±1.30
				±2°

6. RoHS Compliance

8EDGK - 2.5 - XXP - 1Y - 00A (H)  
 (Series No.) (Pitch) (Poles) (Single Pitch) (Color) : 1: (Grey)  
 2: (Blue)  
 3: (Black)  
 4: (Green)  
 5: (Orange)  
 6: (Red)  
 7: (Transparent)  
 8: (Yellow)  
 9: (White)

DETACHED LISTS	
PART NO.:	/
NAME:	DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD:	/
CHKD:	/
DRFT:	/
TITLE:	CUSTOMER DRAWING
DRAWING NO.:	/
REV	DO
SHEET	1/1
SCALE	1:1



8 7 6 5 4 3 2 1