

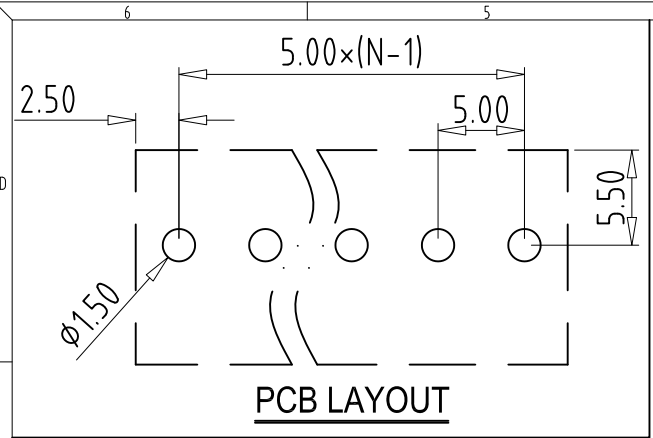



REV	2	CONTENT	CHK	DATE
V0.0		CONTENT	MYZ	21.06.25

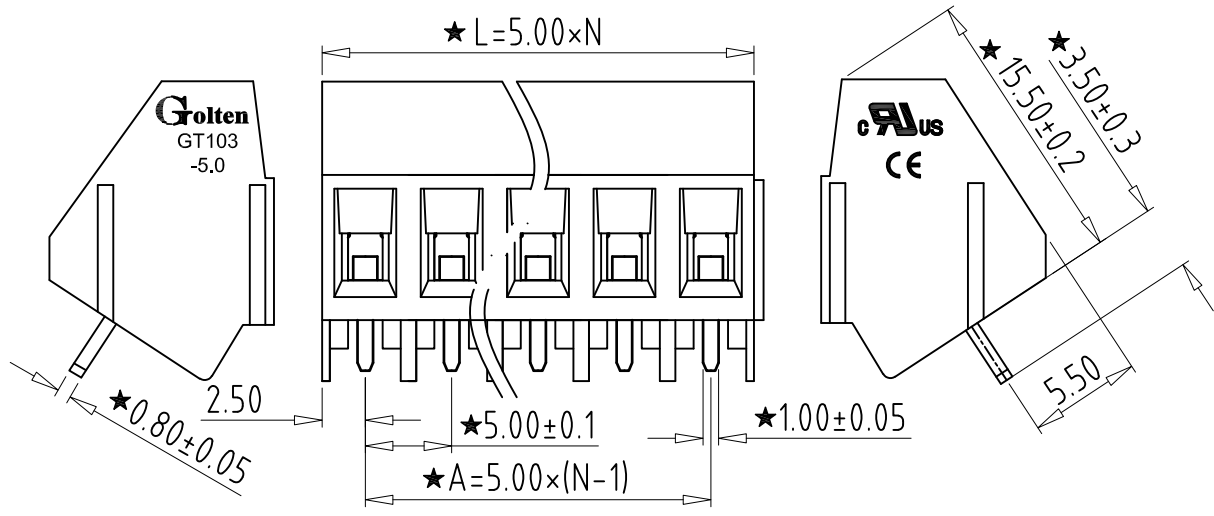

**Electrical :**

- |  |                 |                    |
|--|-----------------|--------------------|
|  | UL              | IEC                |
| 1. Rated Voltage :                       | 300V            | 250V               |
| 2. Rated Current :                       | 10A             | 24A                |
| 3. Torque Value :                        | M2.5, 3.54Lb.in | M2.5, 0.4N.m       |
| 4. Wire Range:                           | 24-12AWG        | 2.5mm <sup>2</sup> |
| 5. Stripping Length :                    | 5-6mm           |                    |
| 6. Withstanding Voltage :                | AC2000V/1Min.   |                    |
| 7. Operating Temperature :               | -40°C~+105°C    |                    |
| 8. RoHS Compliance                       |                 |                    |
| 9. Safty Approval :                      |                 |                    |
| 10. "★" is the key quality control point |                 |                    |

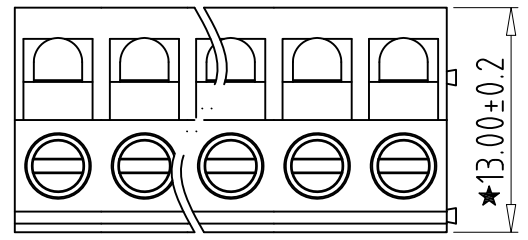

- ① Series NO.
- ② Pitch
- ③ Poles
  - 02 02Contacts
  - 03 03Contacts
  - ... 24 24Contacts
- ④ 1 Single Pitch  
2 Double Pitch
- ⑤ Color: 1 Grey  
2 Blue  
3 Black  
4 Green  
5 Orange  
6 Red  
7 Transparent  
8 Yellow  
9 White
- ⑥ Customer Request: 00--Standard

4	SCREW	XXXXXX	P	Steel	Zn Plated	
3	BLOCK	XXXXXX	P	Brass	Ni Plated	
2	PIN HEADER	XXXXXX	P	Brass	Tin Plated	
1	HOUSING	XXXXXX	/	PA66	UL94V-0	
ITEM	NAME OF PART		NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	MYZ	DATE	21.06.25	SIZE	A4 UNITS mm	SHEET/OF 1 / 1
CHK.		DATE		SCALE	1:1	
APP.		DATE				
宁波冠泰电子有限公司 NINGBO GOLTEN ELECTRONICS CO., LTD.						
				DWGNO.	XXXX	

Total Pitch Tolerances in mm										Nominal dimension range in mm										⊥		=		-		//	
over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 250	over 350	over 500	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 320	over 0	over 10	all	over 0	over 100	over 100	over 150	
±0.18	±0.20	±0.25	±0.3	±0.35	±0.4	±0.60	±0.70	±0.85	±1.00	±0.20	±0.25	±0.30	±0.35	±0.4	±0.55	±0.70	±0.80	±0.90	±1.00	0.2	0.3	0.3	0.3	0.2	0.3	0.5	