

Data sheet

Commercial Art.No.: 92.031.7658.0

Device connector GST18I3F B2 REV WS

Device connectors, snap-in panel mount, GST18i3, 3 pole, female, spring clamp connection, 250 V, 20 A, material thickness 1,5 - 2,5 mm, colour of coding: white



Commercial Art.No.	92.031.7658.0			
EAN	4015573583900			
Order Unit	1			

Certificates / Approvals









Technical data

General

Rated current	20 A				
Rated voltage	250 V				
Pollution degree	2				
Mechanical coding	Code 1				
Rated impulse voltage	4 kV				
Lockable	self-locking (unlocking by tool)				
Color of coding/ contact carrier	white				
Marking of poles	L, N, PE				

Connection Data

Connection cross section solid mm ² max.	2.5 mm ²
Connection cross section solid mm ² min.	0.5 mm ²
Connection cross section fine stranded mm ² max.	1.5 mm ²
Connection cross section fine stranded mm ² min.	0.5 mm ²
Terminations per pole	2
Wire strip length	9 mm

Model

Model	female				
Connection type	spring clamp connection				
Angle of plug	straight				
Degree of protection (IP)	IP20				
Remark to type of connection	Fine stranded and stranded conductors require cable end sleeve				
Thickness of housings (electrical device) 2	1.5 mm				
Thickness of housings (electrical device)	2.5 mm				



built-in component	snap-in

Material

Housing material	Polyamide
halogen free	yes
Contact material	CuZn
Fire load	0.062 kWh
Insulation components continous temperature	100 °C
Surface finish	Tin-plated

Dimensions

Length	37.5 mm
Width	32.8 mm
Height	17.5 mm

Classification

ECLASS 11	
ECLASS 8.1	27440602
ETIM 7.0	EC002566
ETIM 6.0	EC002566
ETIM 5.0	EC002566
ETIM 4.0	EC002566

Product compliance

ROHS conformity status	Compliant/Exempted			
ROHS exceptions	III-6(c)			
REACH-SVHC conformity status	Duty-To-Declare			
REACH-SVHC substances	Lead			
REACH-SVHC CAS numbers	7439-92-1			

Accessories


Commercial Art.No.:	Article-type description:	Description:
05.595.1453.0	Lock (G)ST18V SW	Locking device for snap-in panel mount GST18i3-5, retrofit part, black
05.595.1453.2	Lock (G)ST18V WS	Locking device for snap-in panel mount GST18i3-5, retrofit part, white
05.561.3653.0	cover cap GST18I3VS B WS	Cover piece for female GST18i3, white
05.561.3653.1	cover cap GST18I3VS B SW	Cover piece for female GST18i3, black
05.564.5353.0	cover cap GST18I3/4/5 SW	Cover piece 12 pole black for female parts GST18i3-6
05.564.5353.2	cover cap GST18I3/4/5 WS	Cover piece 12 pole white for female parts GST18i3-6
05.594.4250.0	cover cap ST18/3B + GST18I3 ST WS	
05.594.4253.0	cover cap ST18/3B + GST18I3 ST WS	
07.425.8753.0	Cover GST18I3 WS	Cover to close unused openings for GST18i3 panel mounts. Cover: white
07.425.8753.1	Cover GST18I3 SW	Cover to close unused openings for GST18i3 panel mounts. Cover: black

A		
	ly checked at delivery	for internal use
В	These dimensions will be especially checked at delivery Moly inspection dimensions	With /E morked dimensions are only valid for internal use

Diese Maße werden bei Abnahme besonders geprüft
Ausschließlich Prüfmaße
Mit /E gekenzeichnete Maße sind nur für interne Zwecke gültig

 \bigcirc

 \bigcirc

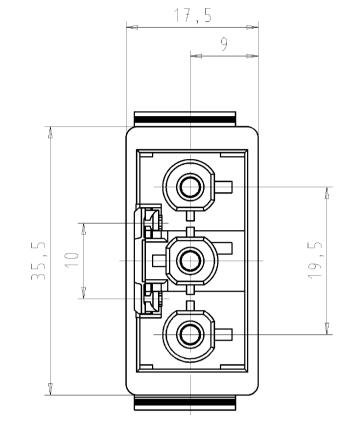



Blechausschnitt

Blechdicke 1,5 - 2,5 mm

section of housing

material thickness 1,5 - 2,5 mm

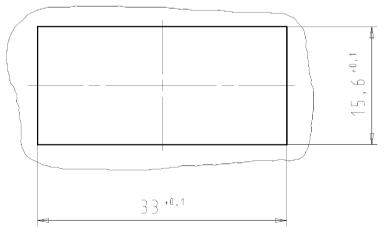

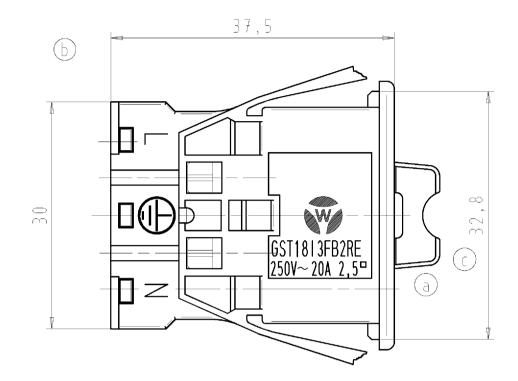

					Teil part					art olc	
				92	2.03	1.76	58.0		W	eiβ	} ,
				92	2.03	1.76	58.1		sch	wa	rΖ
	(This I princip	SO-st le th	andard de 1e deviati	14405€/Tol sbribes the ons of form	envelone i	nrinrinle	According limited by	to t the	size tol	erances	
	Freitol General						CAD - CAD -	Zeio drav	chnung, ke ving, no m	ine man Ianual m	uelle odifi
			/	\bigcirc	We	erkstoff/M	aterial		2007 gezeichnet drown	Tag/1 02.0	
			/	Maβstab/Scale 2:1					geprüft checked Normgepr, Stand, chec	-	
	C	20.0	2.2014/	Vol.	mm ³	Ofl./Sur	۰f.	mm²	Ersatz f		l a c err
b 05.02.2014/ a 04.02.2013/ Index Datum / Blatt Date / Sheet Änderung/Revision		Ŵ		1018	anc		Ty	pe	Be		
					ktrische rbindunge:	0					
	-			4						5	

