

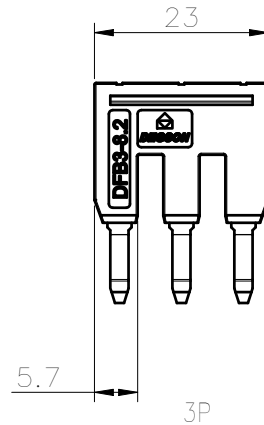
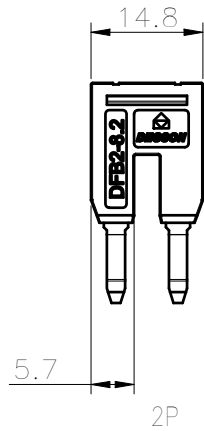


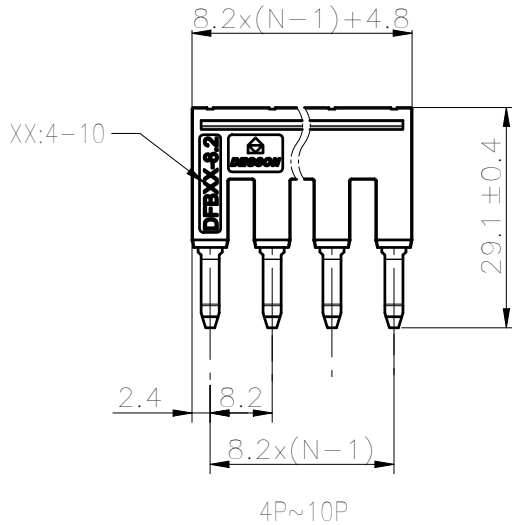


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized in writing. All rights reserved for patent, utility model or design registrations. 非经书面明确授权, 否则禁止转让、复制、利用、交加本文件的内容。一经发现侵权, 侵权者将承担法律责任。本公司保留对本文件的所有权利。

未注公差/General tolerances(mm)											0.1/10		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250		>315	>400
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50



2	Current_carrier	Copper	Sn_Plated
1	Housing	PA66	UL94V_0
ITEM	NAME OF PART	MATERIAL	NOTES

间距/Pitch(mm)/线数范围/Poles	8.2/N=2~10P
使用温度范围/Operating temperature(°C)	-40~+105
符合RoHS环保要求/Conform to RoHS	Yes

APPD: Peng M	2022.06.13
CHKD: Gao WG	2022.06.13
DRFT: Liu Y	2022.06.13

MATERIAL: /	SURFACE: /		
MAT NO./REV: /	MAT STATUS: /		
NAME			
DFBXX-8.2-1Y-00A(H)			
DRAWING NO.	TYPE	DRAWING STATUS	SCALE
/	CUSTOMER DRAWING	/	1:1
			SHEET
			1/1

00	/	/	Liu Y	2022.06.13
REV	ECN	DESCRIPTION	DRFT	DATE

