

Data sheet

Commercial Art.No.: 73.115.4053.0

Multipole adapter HD SAS WR 40 2,5 25

Multipole adapter revos HD 250V/10A 40 pole + ground, male insert, ground right



Commercial Art.No.	73.115.4053.0
EAN	4015573229372
Order Unit	4

Certificates / Approvals



Technical data

General

Model	Pin insert
Size (in accordance with DIN 43880)	16
Inflammability class of insulation material acc. with UL94	V2
Color	Grey
Pollution degree	3
Operating temperature range min.	-40 °C
Operating temperature range max.	120 °C
Modular version	No

Connection Data

Connection type	screw connection
Number of poles	40
Plus switching contacts	0
Number of pole for rated current 2	0
Number of pole for rated current 3	0
Total number of poles (without ground contact)	40
With wire protection	yes
Leiterquerschnitt starr (ein-/mehrdrahtig) Min.	0.5 mm ²
Leiterquerschnitt starr (ein-/mehrdrahtig) Max.	2.5 mm ²
Protective contact	yes

Technical Data UL/CSA

Rated voltage according to UL/CSA	600 V
Rated current according CSA	10 A
Min. conductor cross section flexible wire	0.5 mm ²
Max. conductor cross section flexible wire	2.5 mm ²
Conductor cross section flexible AWG wire	22-14 AWG

Model

With housing	No
Position of protective conductor	Right

Contacts

Contact material	Copper alloy
Surface	Tin-plated
Wire strip length	12 mm
Contact resistance	≤ 6 mOhm

Screws head design/recomm. Torque

Mounting screws	H1/0.5-0.7 Nm
Clamping screws	M2.5/0.4-0.6 Nm Slot
Ground conductor screws	H1/1.2-1.6 Nm

Technical Data DIN EN 61984

Nominal voltage	250 V
Rated voltage face/ground	250 V
Nominal current	10 A
Rated impulse voltage	4 kV


Classification

ECLASS 11	
ECLASS 8.1	27440205
ETIM 7.0	EC000438
ETIM 6.0	EC000438
ETIM 5.0	EC000438
ETIM 4.0	EC000438
ETIM 3.0	EC000438



Fits with

Commercial Art.No.:	Article-type description:	Description:
73.327.4028.0	Bottom BAS GUT GY 16H A	Bottom-base revos basic made of aluminum, with double locking lever and protective cover for terminal adapters mounted on the rear, open, high version, 16-poles
73.700.4058.0	Female insert HD BUC 40 25	revos HD 40 pole + ground, female insert, 250V/10A, crimp connection
76.327.4028.0	Bottom BAS GUT GW 16H A	Bottom-base revos basic made of aluminum, with single locking lever and protective cover for terminal adapters mounted on the rear, open, high version, 16-poles
73.326.4028.0	Bottom BAS GUT GX 16H A	Bottom-base revos basic made of aluminum, with double locking lever for terminal adapters mounted on the rear, open, high version, 16-poles

Gezeichnete Ausführung
40-polig
Drawn version 40 poles

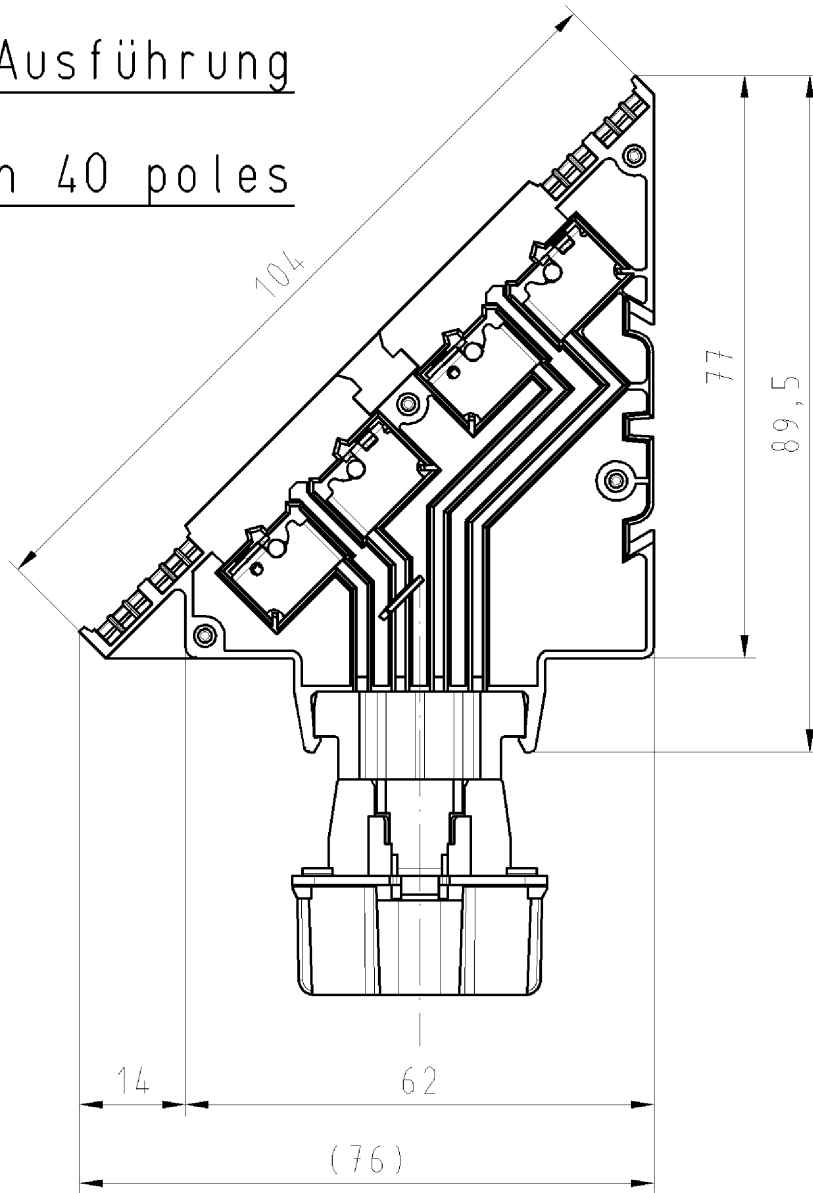

Ansicht ohne Abschlussplatte
und Schutzleiterwinkel gezeichnet!
View drawn without closing plate
and protective wire angel.

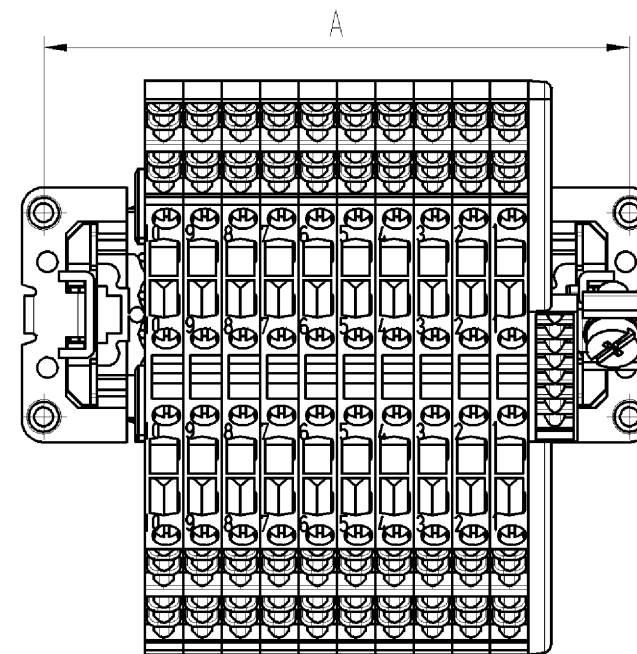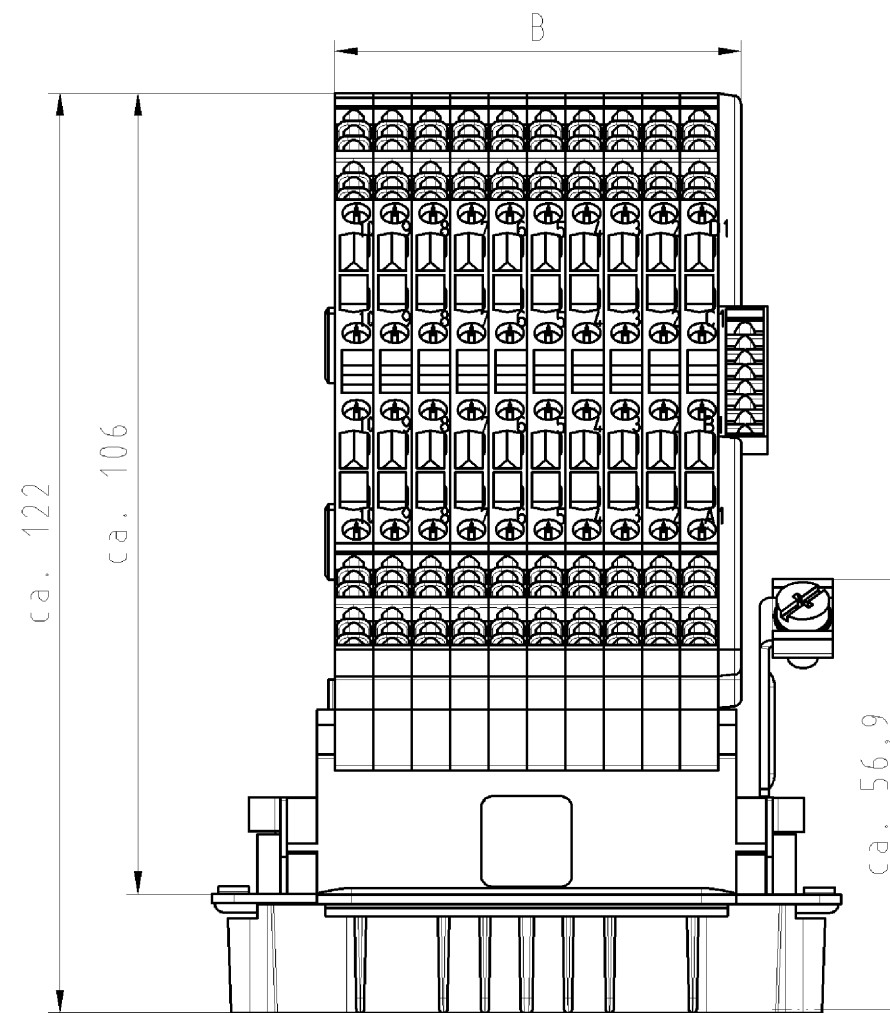

Weitere Daten siehe Katalog
further data see catalog

○ Diese Maße werden bei Abnahme besonders geprüft
□ Ausschließlich Prüfmaße
MIL/Ä. gekennzeichnete Maße sind nur für interne Zwecke gültig

Teilenummer part number	Polzahl pole	A	B
73.115.4053.0	40	77,5	53,8
73.115.6453.0	64	104	84,3

Freitoleranz nach DIN -		CAD - Zeichnung, keine manuellen Änderungen			1. Verwendung: -		Bl.: 1 von 1		
	Maßstab	Werkstoff und Oberfläche:		2005	Tag	Name		Zeichnung Nr.	Index
	1:1			Entworfen	22.02.	Schmitt J.			
				Geprüft	-	-		Ersatz für: -	
				Normgepr.	-	-			
Buchstabe Datum / Blatt		 wieland Elektrische Verbindungen		Benennung					
Änderung				KLEMMEN_ADAPTER mit Steckereinsatz, SL rechts Terminal adaptor plug insert earth right					

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet.
The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited.

731154053001K_4_CAD/MO28_Schnitt_2005-02-22T11:26:16_1.000