



FANSO
孚安特

Button-type Li/MnO₂ Battery




● Application

1. Mother board, control computer, notebook computer, remote control, etc.
2. Card electronic products, such as electronic dictionary, etc.
3. Small crafts, such as flash tourist shoes, necklaces, etc.
4. Electronic watch, flash light, etc.

● Features

1. High voltage, single to 3V
2. Stable self-discharge rate
3. Storage capability
4. Wide temperature range
5. Safety and reliability

P r o f i l e

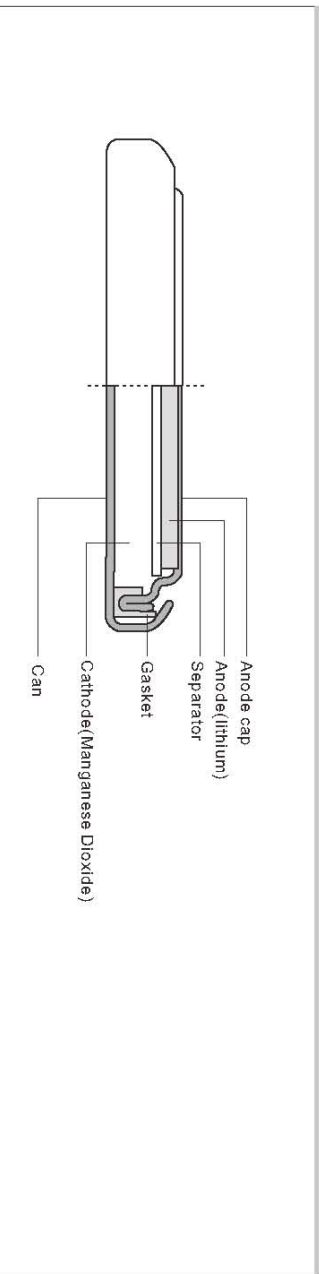

Model	Voltage/V	Capacity/mAh	Load/kΩ	End voltage/V	Temperature(Diameter/mm	Height/mm	Weight/g
CR1616	3	55	30.0	2.0	23±3	16	1.6	1.1
CR1620	3	75	47.0	2.0	23±3	16	2.0	1.3
CR1632	3	130	47.0	2.0	23±3	16	3.2	1.8
CR2016	3	90	30.0	2.0	23±3	20	1.6	1.7
CR2025	3	150	15.0	2.0	23±3	20	2.5	2.7
CR2032	3	220	15.0	2.0	23±3	20	3.2	3.2
CR2450	3	550	7.5	2.0	23±3	24.5	5.0	7.2
CR2477	3	750	2.0	2.0	23±3	24.5	7.7	10

Warning! Do not recharge, over discharge, short-circuit, crush, disassemble, heat above work temperature, incinerate, or expose contents to water. Dispose of used batteries properly in case of explosion, burn and leakage.