


CUSTOMER		PART NO:	P3 ETD4950
DATE	2023-05-25	TEMPERATURE	25°C
HUMIDITY	48%		

## 1. DIMENSIONS

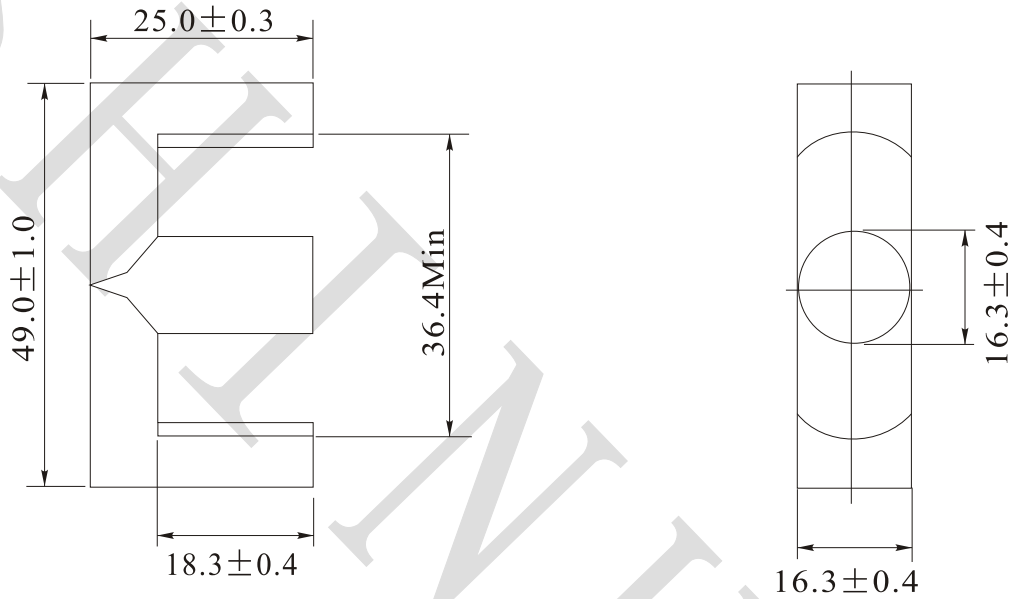

## 2. ELECTRICAL CHARACTERISTICS

AL nH	C1 $\text{mm}^{-1}$	Le mm	Ae $\text{mm}^2$	Ve $\text{mm}^3$	Wt g
$4200 \pm 25\%$	0.55	115.9	211.0	24416	132.8
TEST CONDITIONS	AL: F=10KHz U=0.25V T=25°C ±3°C N=100Ts Φ0.35mm				
TESTING EQUIPMENT	HP4284A CH-258				

Initial permeability:  $2300 \pm 25\%$

PRPARED BY		APPROVED BY	
------------	--	-------------	--

www.shinhom.com

NO.100, YanTa Northern road, xi'an City Shaanxi pro. china TEL: +86-29-87851916 FAX: +86-29-87851840 E-mail: sales@shinhom.com.cn