


0.80±0.05



12.40±0.30

REVISION RECORD			
REV	ECN	DESCRIPTION	DRAFT DATE

NOTES1:


- UL Standard
- Rated voltage/current : 300V / 25A
- Torque value : M4 , 10.53lb.in
- Wire range : 22~12AWG

NOTES2:

- Dimension shall be interpreted per ASME Y14.5-2009
- Pitch : 9.50mm, Poles : N=02~24P
- Withstanding voltage : AC1600V/1Min
- Operating temperature: -40°C~+105°C
- Undimensioned tolerances:

Pitch range	in	mm	Over	Over	Over	Over	Over	Over	Over	
6	TO	10	TO	30	TO	60	TO	100	TO	150
10	TO	24	TO	30	TO	60	TO	100	TO	150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°		

6. RoHS Compliance

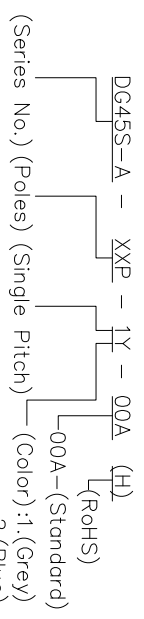

- 00A- (Standard)
- 1. (Grey)
- 2. (Blue)
- 3. (Black)
- 4. (Green)
- 5. (Orange)
- 6. (Red)
- 7. (Transparent)
- 8. (Yellow)
- 9. (White)

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD:	/	TITLE:	CUSTOMER DRAWING
CHKD:	/	DRAWING NO.:	/
DFTI:	/	REV:	DO
THIRD ANGLE PROJECTION		SHEET:	1/1
SCALE:	1:1	DO NOT SCALE DRAWING	SCALE

A B C D E F G H

8

7

6

5

4

3

2

1

A B C D E F G H