

D-SUB Series



KLS1-221 D-SUB 2 ROW DIP STRAIGHT TYPE

Electrical Specification:

Current Rating: 2 AMP
 Insulator Resistance: 5000M ohms min. at DC 500V
 Contact Resistance: 20m ohms max. at DC 100mA
 Operating Temperature: -55°C~+105°C

Material:

Housing: 30% Glass filled PBT UL94V-0
 Contacts: Phosphor Bronze
 Shell: Steel, 100u" Tin Over 50u" min Nickel
 Clinch Nut: Brass, 100u" min Nickel Plated
 Screwlock: Brass, 100u" min Nickel Plated

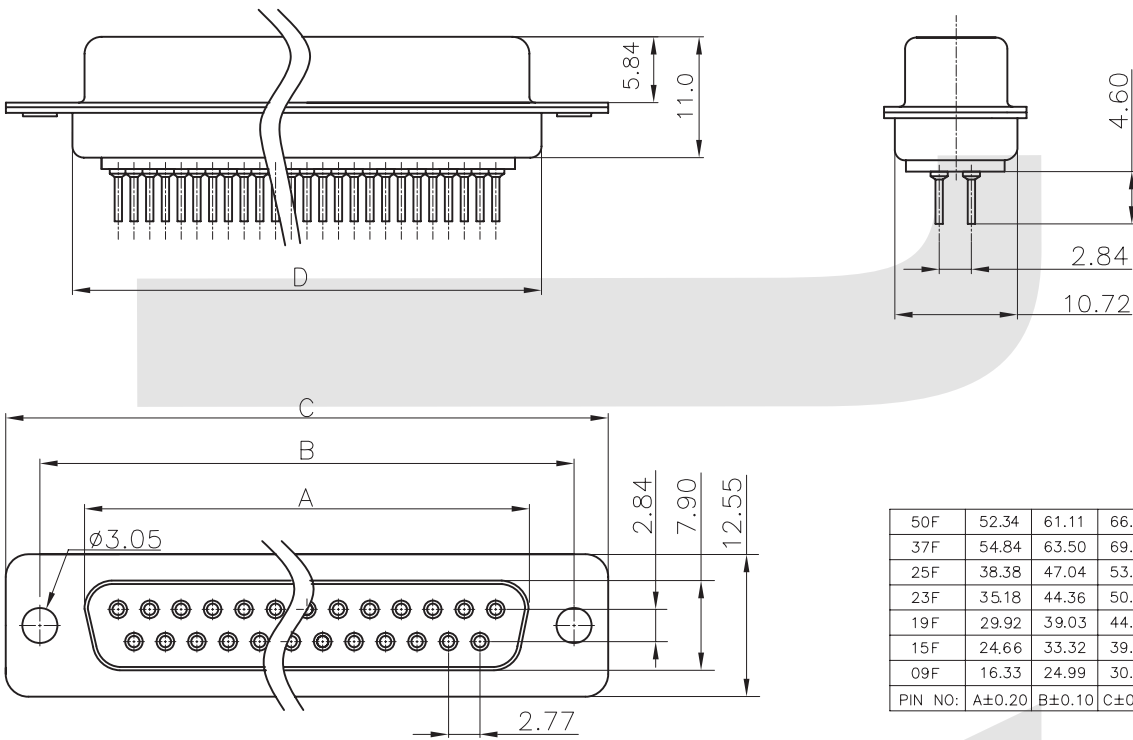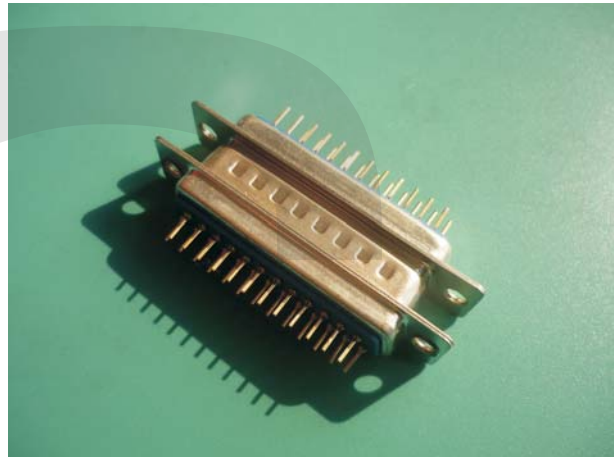

ORDER INFORMATION

Product NO.: KLS1-221-XX - F -L

Pos. NO. _____ L=Blue B=Black W=White
 001=001 pos.
 Contact Number of Row _____
 221=DP Series
 Number of Contacts _____ M=Male F=Female

D-SUB Series



KLS1-221 D-SUB 2 ROW SOLDER TYPE

Electrical Specification:

Current Rating: 2 AMP
 Insulator Resistance: 5000M ohms min. at DC 500V
 Contact Resistance: 20m ohms max. at DC 100mA
 Operating Temperature: -55°C~+105°C

Material:

Housing: 30% Glass filled PBT UL94V-0
 Contacts: Phosphor Bronze
 Shell: Steel, 100u" Tin Over 50u" min Nickel
 Clinch Nut: Brass, 100u" min Nickel Plated
 Screwlock: Brass, 100u" min Nickel Plated

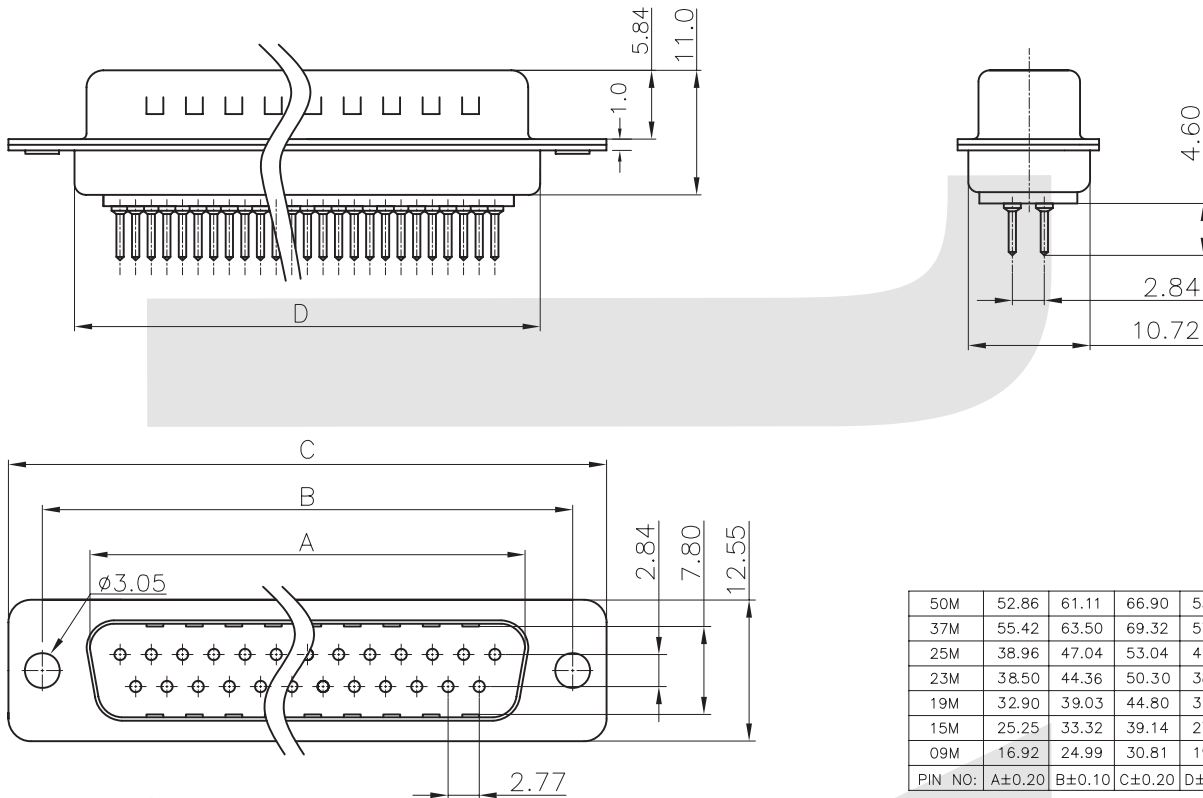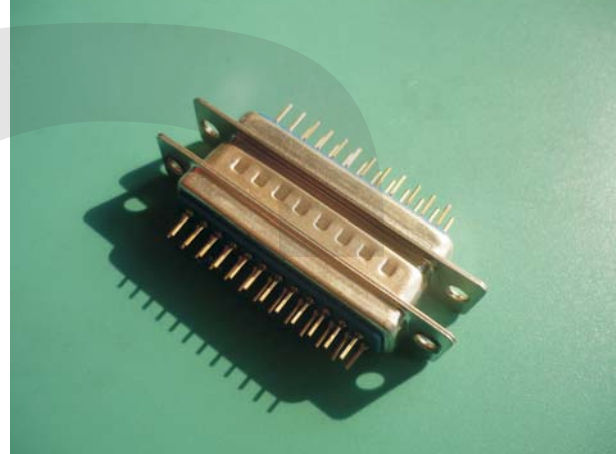

| | | | | |
|---------|--------------|--------------|--------------|--------------|
| 50M | 52.86 | 61.11 | 66.90 | 55.30 |
| 37M | 55.42 | 63.50 | 69.32 | 57.71 |
| 25M | 38.96 | 47.04 | 53.04 | 41.30 |
| 23M | 38.50 | 44.36 | 50.30 | 38.15 |
| 19M | 32.90 | 39.03 | 44.80 | 33.02 |
| 15M | 25.25 | 33.32 | 39.14 | 27.51 |
| 09M | 16.92 | 24.99 | 30.81 | 19.28 |
| PIN NO: | A \pm 0.20 | B \pm 0.10 | C \pm 0.20 | D \pm 0.20 |

ORDER INFORMATION

Product NO.: KLS1-221-XX -M -L

Pos. NO. _____ L=Blue B=Black W=White
 001=001 pos.
 Contact Number of Row _____
 221=DP Series
 Number of Contacts _____ M=Male F=Female