
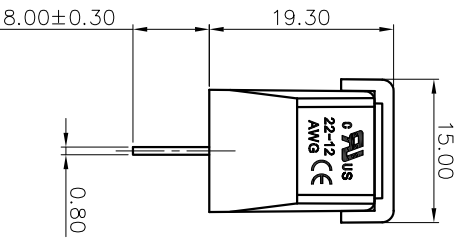
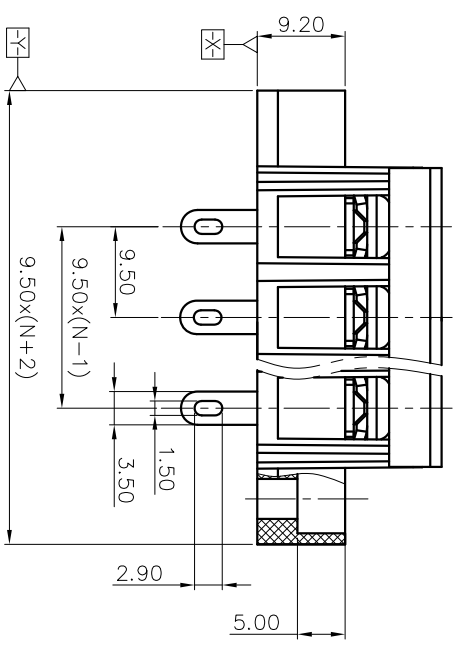



REVISION RECORD			
REV	EQN	DESCRIPTION	DATE


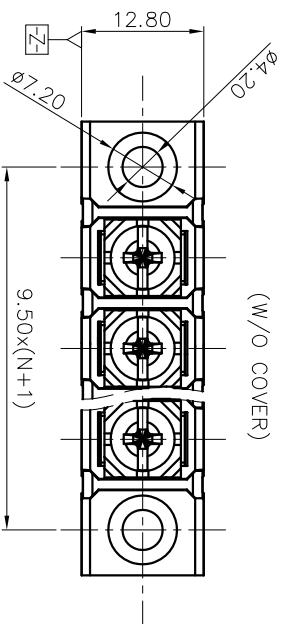


NOTES1:  
 UL Standard  
 1. Rated voltage/current : 300V / 20A  
 2. Torque value : M4 , 10.53l.b.in  
 3. Wire range : 22~12AWG

NOTES2:  
 1. Dimension shall be interpreted per ASME Y14.5-2009  
 2. Pitch : 9.5mm, Poles : N=02~20P  
 3. Stripping length : 8~9mm  
 4. Withstanding voltage : AC1600V/1min  
 5. Operating temperature : -40°C~+105°C  
 6. Undimensioned tolerances:

Pitch range	in	Nominal dimension	range	mm	in	mm	in
Over	6	TO	30	Over	60	Over	100
To	10	TO	10	To	100	To	150
6	10	24	30	60	100	150	±2
F0.15	F0.20	F0.30	F0.50	F0.70	F1.00	F1.30	±2

7. RoHS Compliance

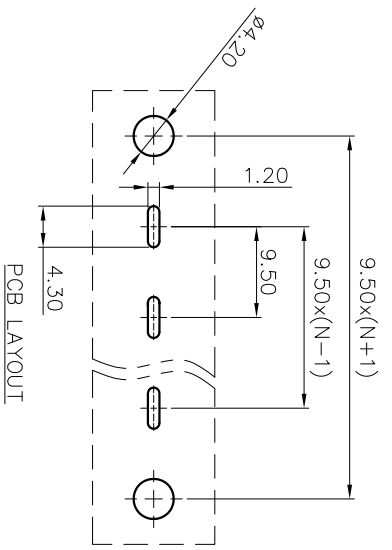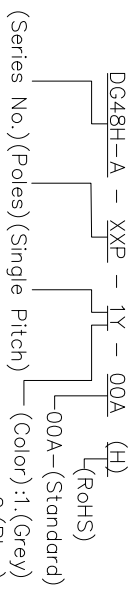

PART NO.:		/	
NAME:		NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司	
APPR:	/	APP:	/
CHKD:	/	CHKD:	/
DETACHED LISTS		THIRD ANGLE PROJECTION	
DRTT:	/	DRTT:	/
TITLE: CUSTOMER DRAWING		DRAWING NO.:	
REV: DO		SHEET: 1/1	
SCALE: 1:1		DO NOT SCALE DRAWING	

A B C D E F G H

8 7 6 5 4 3 2 1