


**Dimensions 外形尺寸**

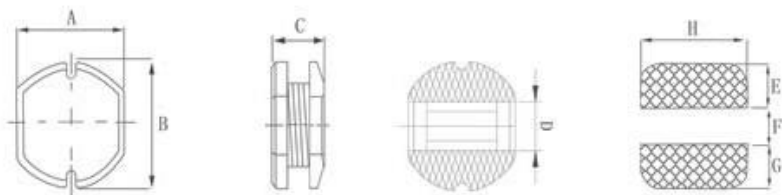

Unit: mm  
 A:  $12.3 \pm 0.3$   
 B: 4.5max  
 C:  $5.0 \pm 0.2$   
 D:  $2.2 \pm 0.2$

**Electrical properties 电气性能**

Part NO. 型号	L ( $\mu$ H)	允差 TOL	测试频率 Ft(KHz)	直流电阻 Rdc(m $\Omega$ max)	额定电流 Idc(mA)
LGCI0806-100M	10	$\pm 20\%$ (M)	1.0	70	2300
LGCI0806-120M	12			80	2000
LGCI0806-150M	15			90	1800
LGCI0806-180M	18			100	1600
LGCI0806-220M	22			110	1500
LGCI0806-270M	27			120	1300
LGCI0806-330M	33			130	1200
LGCI0806-390M	39			160	1100
LGCI0806-470M	47			180	1000
LGCI0806-560M	56			240	940
LGCI0806-680M	68			280	850
LGCI0806-820M	82			370	780
LGCI0806-101M	100			430	720
LGCI0806-121M	120			470	660
LGCI0806-151M	150			640	580
LGCI0806-181M	180			960	490
LGCI0806-221M	220			1100	420
LGCI0806-271M	270			1260	400
LGCI0806-331M	330			1770	360
LGCI0806-471M	470			1960	340

**Test:**

- \* L — HP4342A meter.
- \* For special specifications please contact with us.
- \* Specifications given here in may be changed at any time without prior notice please confirm specifications before your order or use.

**测试仪器:**

- \* L — HP4342A 测试仪
- \* 对上列参数有不同要求的客户，敬请联系。
- \* 本规格书所列参数如有更改，以订货时所提供的数据为准。