
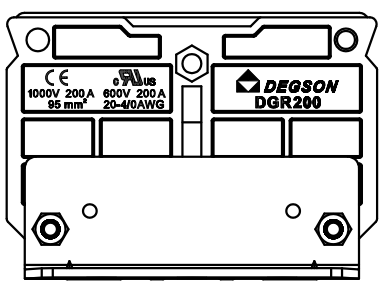


REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

(W/O COVER)

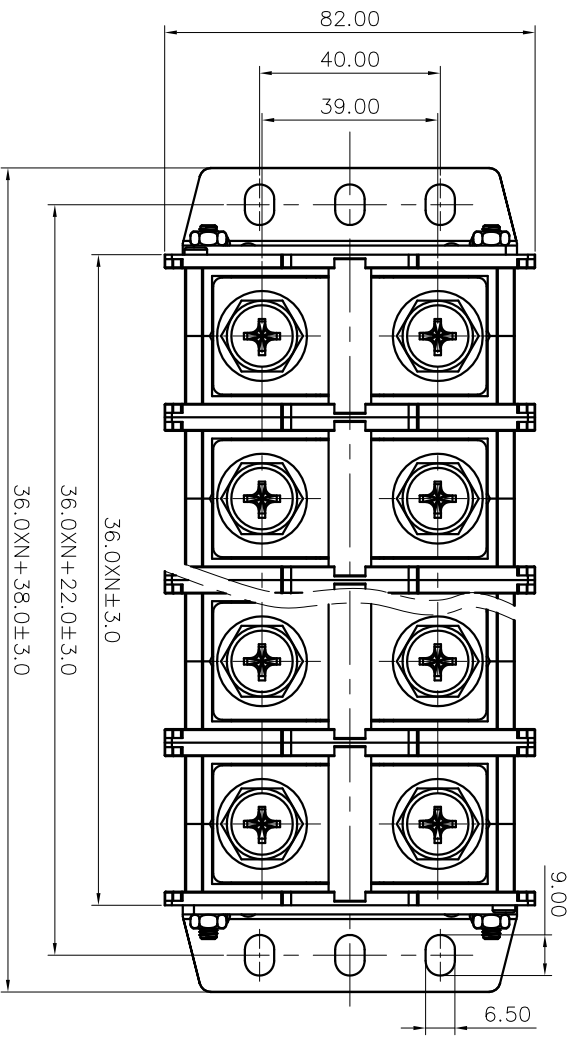


- NOTES1:
UL Standard
1. Rated voltage/current : 600V / 200A
2. Torque value : M10 , 80Lb.in
3. Wire range : 20~4/0AWG

- NOTES2:
1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 36.0mm, Poles : N=01~11P
3. Withstanding voltage : AC2200V/1Min
4. Operating temperature: -40°C~+125°C
5. Undimensioned tolerances:

Pitch range	in mm	Nominal dimension	range	mm	in mm	mm	in mm
Over	6	Over	30	Over	60	Over	150
TO	10	TO	60	TO	100	TO	150
6	10	24	30	60	100	150	150
±0.15/±0.20/±0.30/±0.30/±0.50/±0.70/±1.00/±1.30		±2°		±2°			

6. RoHS Compliance

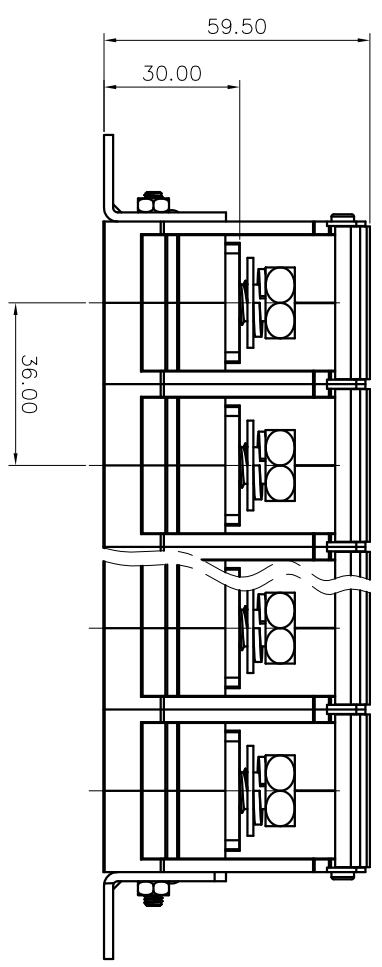

DGR200 - XXP - 1Y - 20A (H)
(RoHS)
(Series No.) (Poles) (Single Pitch) (Color):
20A-(Customer Request)
3. (Black)

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD.:	/	TITLE:	DGR200-XXP-1Y-20A(H) CUSTOMER DRAWING
CHKD.:	/	DRWING NO.:	/
DRFT.:	/	REV	DO
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	SCALE
3	2	1	1:1