

4

3

2

1

THIS DRAWING IS UNPUBLISHED.






RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.



© COPYRIGHT - By -

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	F3	REVISED PER ECR-18-008156	21JUN2018	JB	DZ

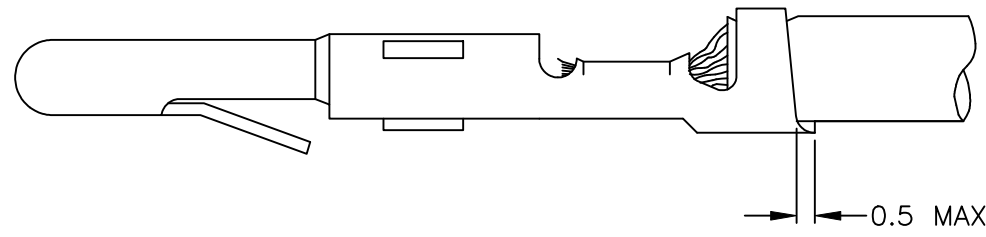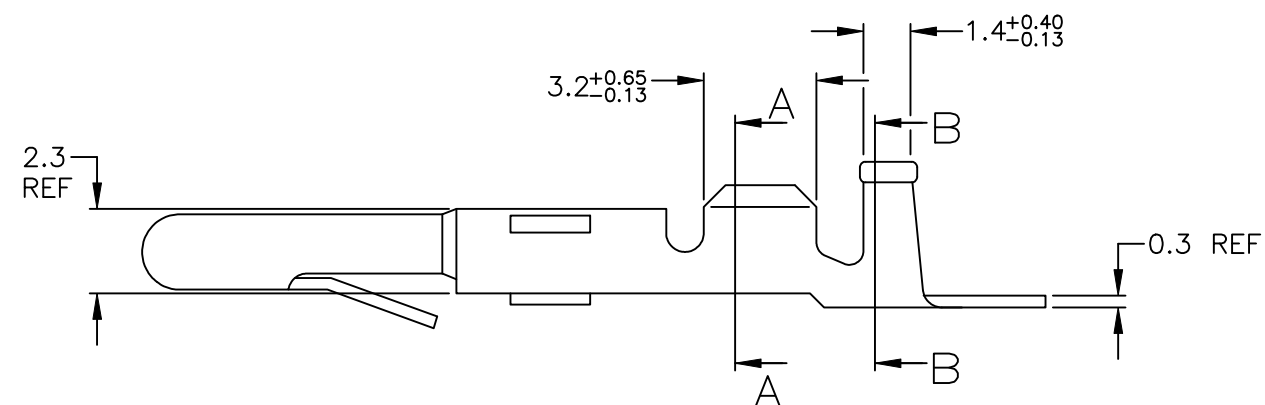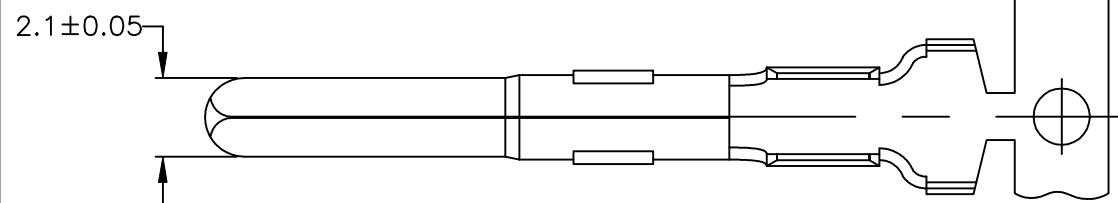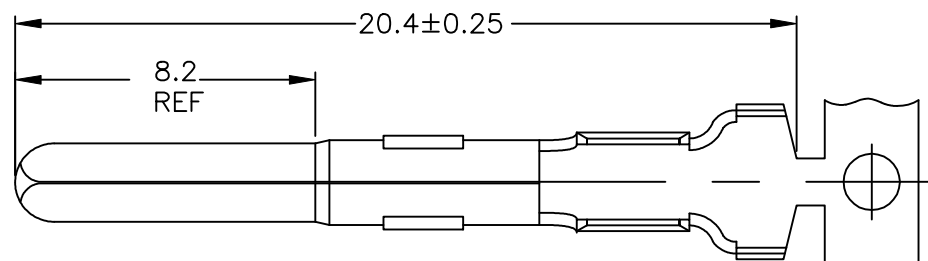

- △1 FOR USE ON STANDARD APPLICATORS.(RIGHT-LEFT FEED)
- △2 FOR USE ON MINIATURE APPLICATORS.(LEFT-RIGHT FEED)

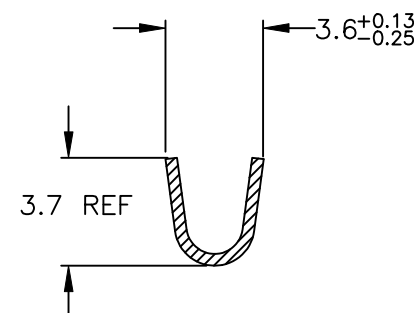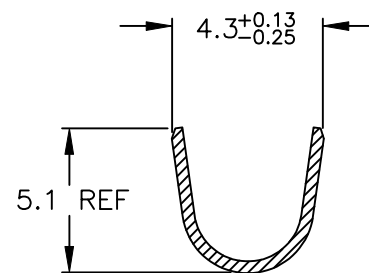

WIRE RANGE :
1.0-2.5mm² AWG

INSULATION RANGE
2.6-3.8mm DIA

	△1	△2	PLATING	PLATING	MATERIAL	PART NUMBER
OBSOLETE						
OBSOLETE						
OBSOLETE						
OBSOLETE						

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN J.v.LIEMPT 24 OCT 96
CHK A.BIJNEN.
APVD M.v.DRIEL

TE Connectivity

PIN MATE-N-LOK.

PRODUCT SPEC
APPLICATION SPEC

SIZE A3 CAGE CODE 00779 DRAWING NO C=163303 RESTRICTED TO -

WEIGHT 0.000000

CUSTOMER DRAWING SCALE - SHEET 1 OF 1 REV F3

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
0 PLC	± -
1 PLC	± -
2 PLC	± -
3 PLC	± -
4 PLC	± -
ANGLES	± -
	± -

MATERIAL	FINISH
-	-