





# 宁波速普电子有限公司

NINGBO SUPU ELECTRONICS.CO.,LTD

## 产品规格书 Product Specification

|   |                                |
|---|--------------------------------|
| 接插体/Inserts                             |                                |
| 额定电流/Rated current                      | 40A                            |
| 额定电压/Rated voltage                      | 500V                           |
| 污染等级/Pollution degree                   | 3                              |
| 额定脉冲耐受电压/Rated surge voltage            | 6KV                            |
| 绝缘电阻/Insulation resistance              | $\geq 10^{10} \Omega$          |
| 材料/Material                             | PC                             |
| 使用环境温度/Usage ambient temperature        | -40°C - +125°C                 |
| 阻燃等级/Flame retardant rating             | V0                             |
| 可插拔次数/Mechanical working life           | $\geq 500$                     |
| UL/CSA额定电压/Rated voltage acc. to UL/CSA | 600V                           |
| 接插针/Contacts                            |                                |
| 材料/Material                             | 铜/Copper alloy                 |
| 镀层/Coating                              | 镀金/Au 镀银/Ag                    |
| 接触电阻/Contact                            | $\leq 1m\Omega$                |
| 接线形式/Connection                         | 冷压连接/Crimp connection          |
| 导线规格/Wire gauge                         | 1.5-10mm <sup>2</sup> AWG 16-8 |
| 拧紧力矩/Tightening torque                  | /                              |
| 剥线长度/Stripping length                   | /                              |

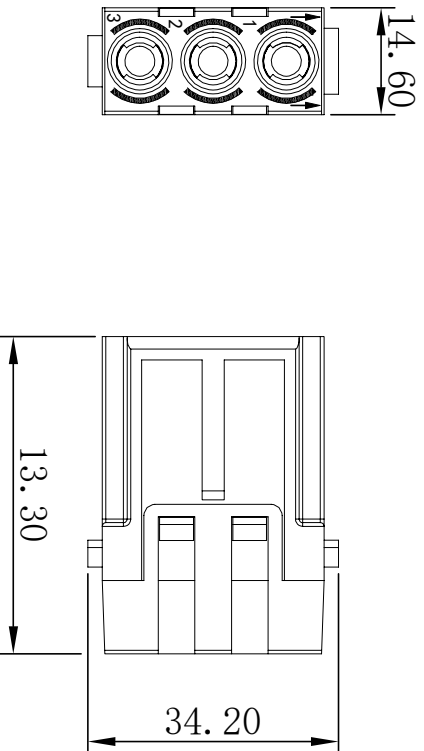

|         |    |         |                    |
|---------|----|---------|--------------------|
|         |    | Rev. 01 | 订货号<br>PART NUMBER |
| 单位/Unit | mm |         | SMK-003-MC         |