



Features

- Height of 4.0 mm max.
- Current rating up to 3.5 A
- RoHS compliant*

Applications


- Input/output of DC/DC converters
- Power supplies for:
 - Portable communication equipment
 - Camcorders
 - LCD TVs

SRR6038 Series - Shielded SMD Power Inductors



Electrical Characteristics

Bourns Part Number	Inductance 100 kHz		Q Ref.	Test Frequency (MHz)	SRF Typ. (MHz)	DCR Max. (mΩ)	I rms (A)	I sat (A)
	(μH)	Tol. %						
SRR6038-3R3Y	3.3	±30	9.8	7.96	75.9	20	3.50	3.60
SRR6038-5R0Y	5.0	±30	8.9	7.96	42.6	24	2.90	2.95
SRR6038-6R2Y	6.2	±30	9.0	7.96	42.3	27	2.50	2.60
SRR6038-7R4Y	7.4	±30	7.5	7.96	32.9	31	2.30	2.55
SRR6038-8R2Y	8.2	±30	7.4	7.96	29.6	34	2.20	2.45
SRR6038-8R7Y	8.7	±30	7.3	7.96	27.5	34	2.20	2.35
SRR6038-100Y	10	±30	8.8	2.52	24.9	38	2.00	2.05
SRR6038-120Y	12	±30	8.3	2.52	17.9	53	1.70	1.95
SRR6038-150Y	15	±30	8.6	2.52	18.0	57	1.60	1.90
SRR6038-180Y	18	±30	8.0	2.52	13.8	92	1.50	1.70
SRR6038-220Y	22	±30	8.8	2.52	13.9	96	1.30	1.60
SRR6038-270Y	27	±30	7.7	2.52	12.5	109	1.20	1.30
SRR6038-330Y	33	±30	8.6	2.52	12.5	124	1.10	1.20
SRR6038-390Y	39	±30	8.3	2.52	11.8	138	1.00	1.10
SRR6038-470Y	47	±30	8.5	2.52	10.4	155	0.95	1.00
SRR6038-560Y	56	±30	8.2	2.52	8.8	202	0.85	0.90
SRR6038-680Y	68	±30	7.4	2.52	7.5	234	0.75	0.87
SRR6038-820Y	82	±30	7.6	2.52	7.6	324	0.70	0.75
SRR6038-101Y	100	±30	6.7	0.796	6.2	358	0.65	0.68

Soldering Profile

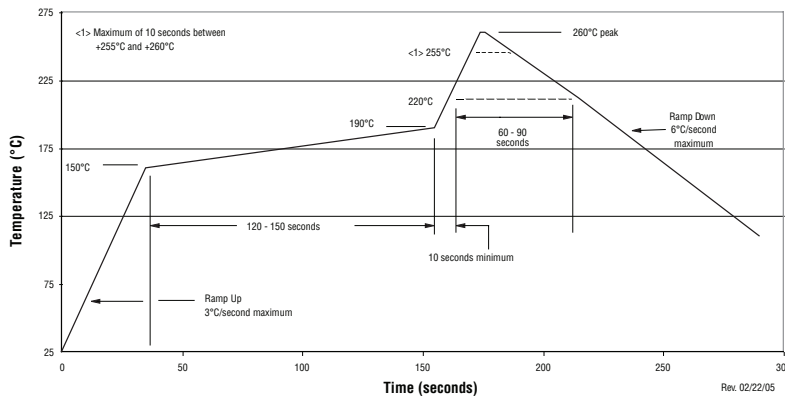

Electrical Schematic



*RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011. Specifications are subject to change without notice. The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.


General Specifications

Test Voltage 0.1 V
 Reflow Soldering ...230 °C, 50 sec. max.
 Operating Temp.-40 °C to +125 °C
 (Temperature rise included)
 Storage Temperature.. -40 °C to +125 °C
 Resistance to Soldering Heat
 260 °C for 10 sec.
 Moisture Sensitivity Level.....1
 ESD Classification (HBM).....N/A


Materials

Core Ferrite
 Wire Enameled copper
 Adhesive.....Epoxy resin
 Terminal..... Ag/Ni/Sn
 Rated Current
 Ind. drop 35 % typ. at Isat
 Temperature Rise..... 30 °C typ.
 at rated I rms
 Packaging..... 1000 pcs. per reel

Product Dimensions

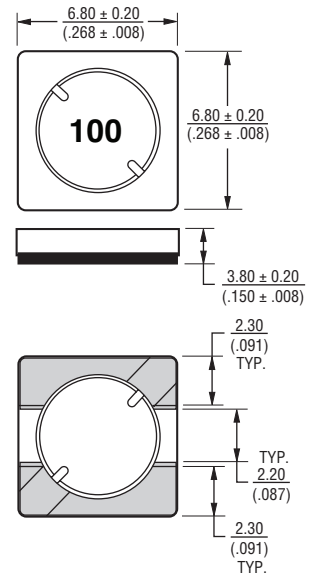













Recommended Layout



SRR6038 Series - Shielded SMD Power Inductors

BOURNS®

Inductance vs. Current

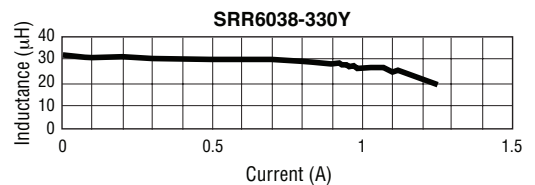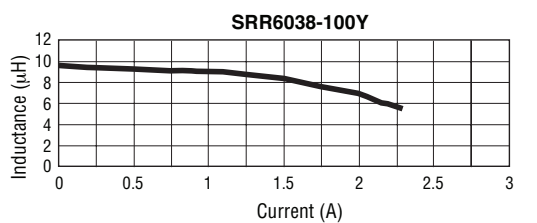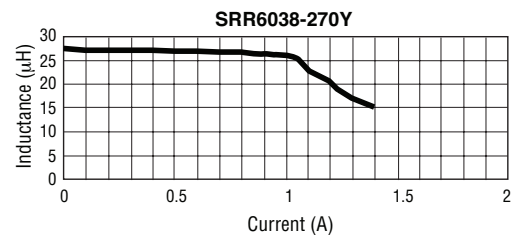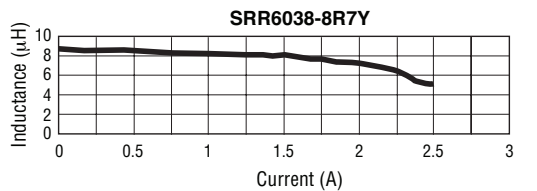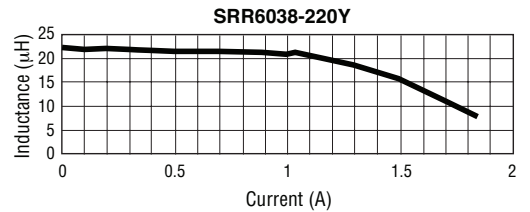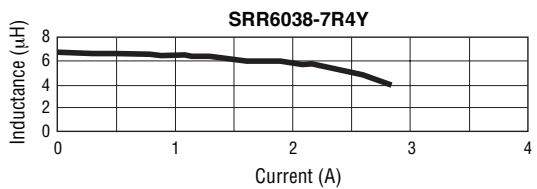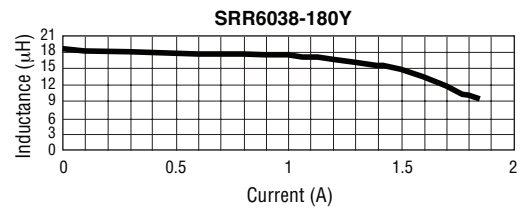
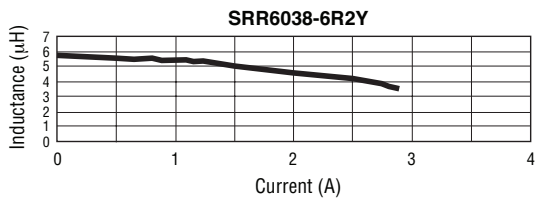
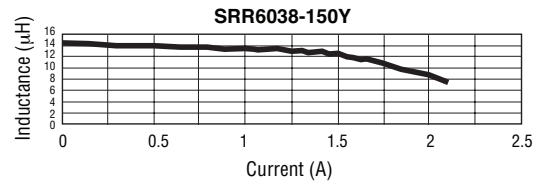
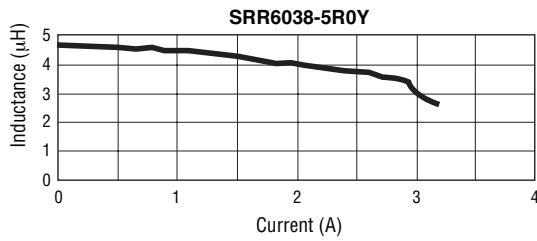
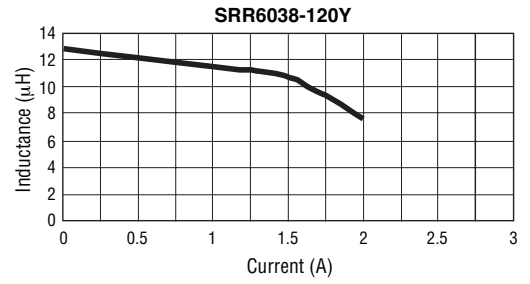
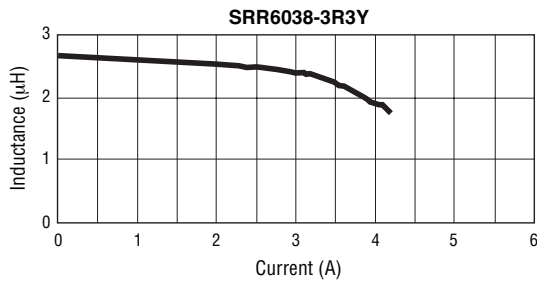


Specifications are subject to change without notice.
 The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.
 Users should verify actual device performance in their specific applications.

SRR6038 Series - Shielded SMD Power Inductors

BOURNS®

Inductance vs. Current

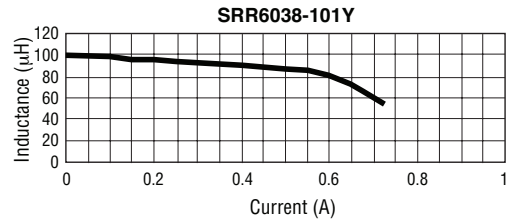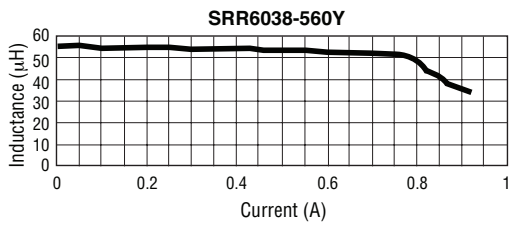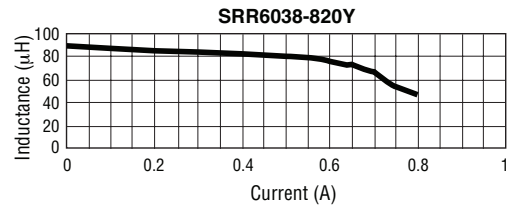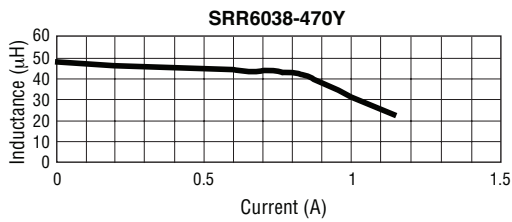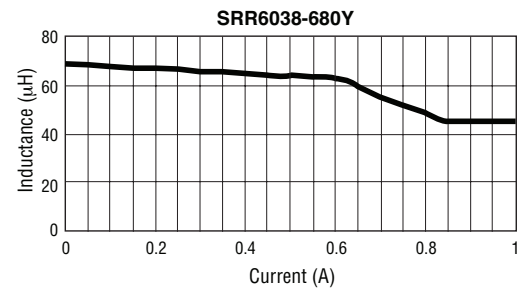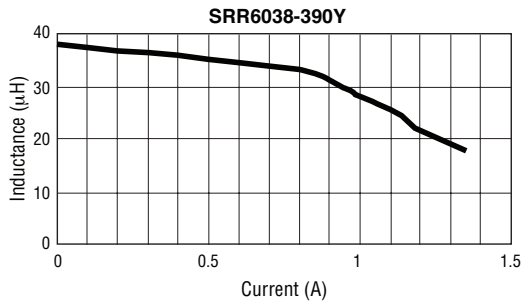


Specifications are subject to change without notice.
The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.
Users should verify actual device performance in their specific applications.

SRR6038 Series - Shielded SMD Power Inductors

BOURNS®

Packaging Specifications

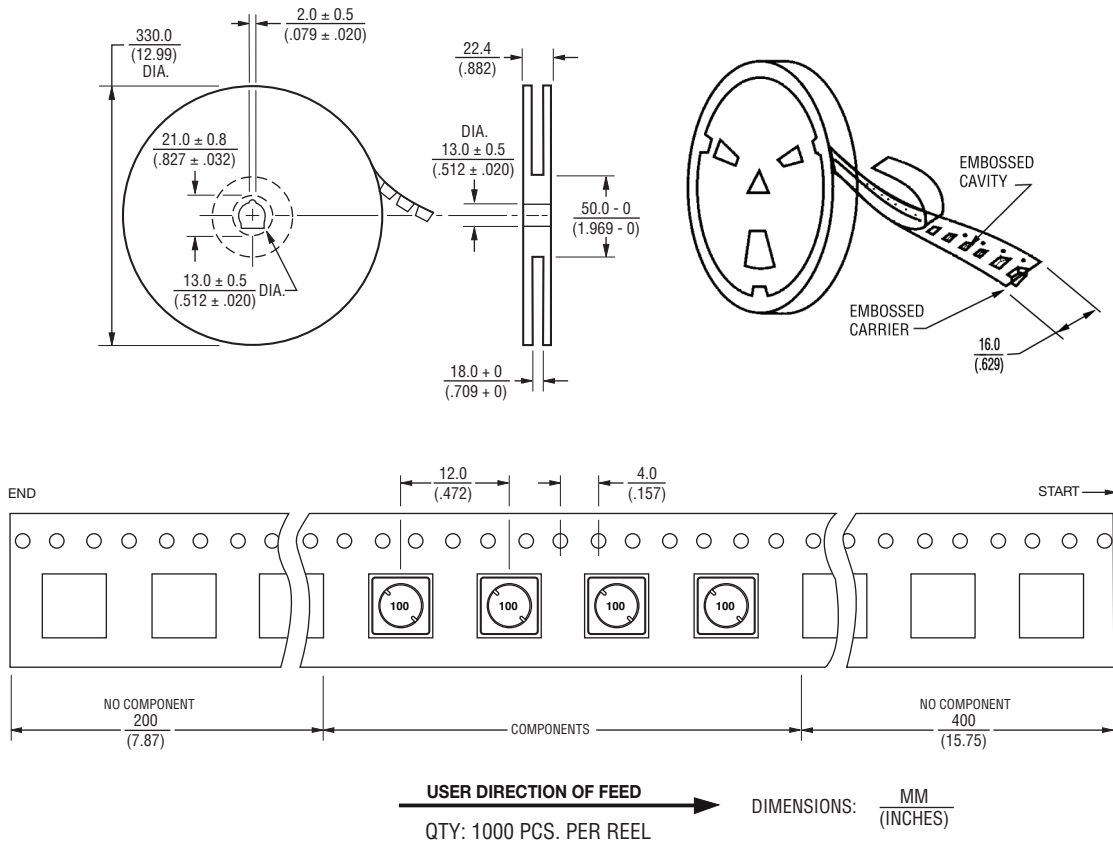

REV. 03/18

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.

Users should verify actual device performance in their specific applications.