


Category: 插拔式端子-插头/Plug-in terminal-plug

Product name: MC-RE3.5VXXC-RK-0001

Product Description: 3.5mm , 160V , 8A CE , UL



Product Picture

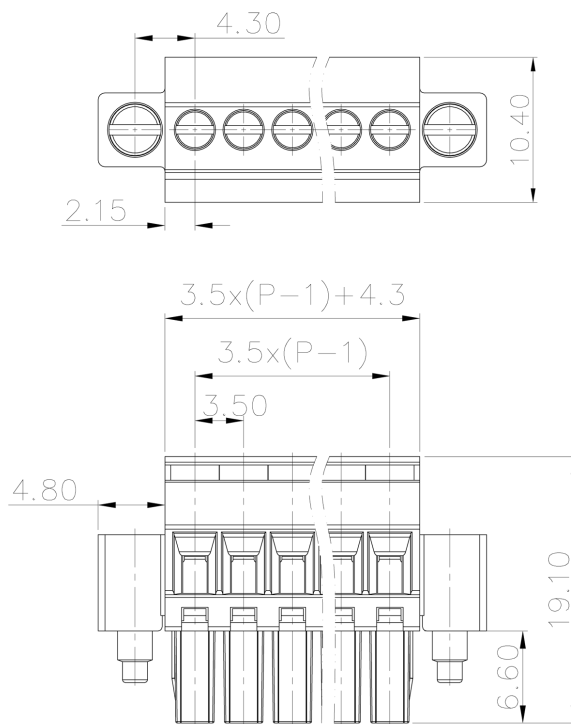

基本信息 /Basic Information

| | |
|-------------------------------|----------------------|
| 产品型号 SUPU ID | MC-RE3.5VXXC-RK-0001 |
| 产品间距 Pitch | 3.5mm |
| 产品层数 Number of levels | 1 |
| 产品位数 Number of connections | 2P-24P |
| 接线方式 Connection method | 螺钉接线Screw connection |

| | |
|--------------------------|------------|
| 防护等级 Protection Level | IP20 |
| 工作温度 Work temperature | -40~+105°C |

IEC数据 /IEC Data

| | | | |
|--|------------------------|-------|-------|
| 额定电流 Rated Current | 8A | | |
| 额定电压 Rated Voltage | 160V | | |
| 过压类别 Overvoltage category | III | III | II |
| 污染等级 Pollution degree | 3 | 2 | 2 |
| 额定冲击电压 Rated impulse voltage | 2.5KV | 2.5KV | 2.5KV |
| 额定电压 Rated Voltage | 160V | 160V | 320V |
| 硬导线截面积 Conductor cross section solid | 0.2-1.5mm ² | | |
| 柔性导线截面积 Conductor cross section flexible | 0.2-1.5mm ² | | |
| 柔性导线截面积，带绝缘管套 Conductor cross section flexible,with furrule | 0.2-1.5mm ² | | |
| 锁线螺钉规格 Locking screw Specification | M2 | | |
| 额定扭矩 Rated Torque | 0.2N·m | | |
| 固定螺钉规格 Fixed Screw Specification | M2.5 | | |
| 额定扭矩 Rated Torque | 0.3N·m | | |
| 剥线长度 Stripping length | 7-8mm | | |

UL数据 /UL Data

| | | | |
|-----------------------|----|---|----|
| 使用组别 Use group | B | C | D |
| 额定电流 Rated Current | 8A | - | 8A |

| | | | |
|-----------------------|------|---|------|
| 额定电压 Rated Voltage | 150V | - | 300V |
|-----------------------|------|---|------|

| | |
|-------------------------------|----------|
| 额定接线容量 Rated cross section | 24-16AWG |
|-------------------------------|----------|

材料信息 /Material Data

| | |
|-----------------------------|------|
| 绝缘材料 Insulation material | PA66 |
|-----------------------------|------|

| | |
|-------------------------------------|---|
| 绝缘材料组别 Insulation material group | I |
|-------------------------------------|---|

| | |
|---|----|
| 阻燃等级，符合UL94 Flame retardant grade, UL94 compliance | V0 |
|---|----|

| | |
|--------------------------|--------------|
| 导体材料 Contact material | Copper alloy |
|--------------------------|--------------|

| | |
|-----------------------------------|-----------|
| 导体表面镀层 Surface characteristics | Sn,Plated |
|-----------------------------------|-----------|

产品认证 /Product Certification

认证图标
Certificate



UL证书号
UL file No.

VDE证书号
VDE No.

TUV证书号
TUV No.

Ningbo Supu Electronics Co.,Ltd

Zip code: 315303

Fax: +86 574-63288170

E-mail : askme@supu.cn

Address: No. 625, Kandun Town Street, Cixi
City, Zhejiang Province

Switchboard: +86 574-63288158

E-mail : askme@supu.cn

Service Hotline: 400-626-6336



Code

