




宁波速普电子有限公司

NINGBO SUPU ELECTRONICS.CO.,LTD

产品规格书

Product Specification

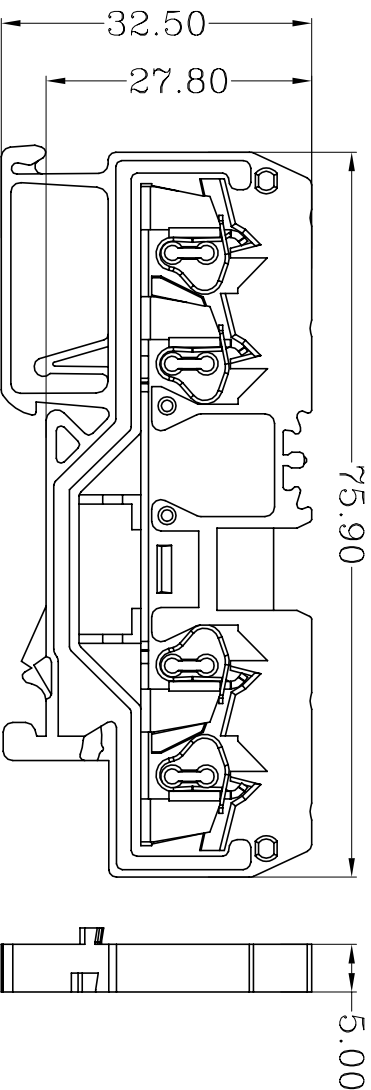

IEC 额定数据/IEC Rated data

| | | | |
|--|------------------------|------|---|
| 接线范围/Wire range | 0.2-2.5mm ² | | |
| 单股导线/Solid | 0.2-2.5mm ² | | |
| 软导线/Stranded | 0.2-2.5mm ² | | |
| 带端头软导线/Stranded with ferrules without plastic sleeve | 0.2-1.5mm ² | | |
| 带预绝缘端头软导线/Stranded with ferrules with plastic sleeve | 0.2-1.5mm ² | | |
| 剥线长度/Strip length | 8-9mm | | |
| 额定电压/Rated voltage | 800V | | |
| 额定电流/Rated current | 24A | | |
| 额定脉冲耐受电压/Rated surge voltage | 8KV | | |
| 污染等级/Pollution degree | 3 | | |
| 过电压类别/Surge voltage category | III | | |
| UL 额定数据/UL Rated data | B | C | D |
| 额定电流/Rated current | 20A | 20A | |
| 额定电压/Rated voltage | 600V | 600V | |
| 接线范围/Wire range | 28-12AWG | | |

其他信息/Other information

| | |
|---------------------------------------|------------------|
| 塑件/Housing | PA66 |
| 触点材料/Contact | 铜合金/Copper alloy |
| 镀层/Coating | 锡/Tin |
| 阻燃等级/Flame retardant rating | V0 |
| 使用环境温度/Usage ambient temperature | -25°C - +70°C |
| 储存及运输环境温度/Storage ambient temperature | -40°C - +85°C |
| 导轨尺寸/rails Size | SP35X7.5/SP35X15 |

认证/Approval



订货信息 Order Info

| 订货号 | 颜色 |
|-------------|-----------|
| PART NUMBER | COLOR |
| 225931 | 灰色 Gray |
| 225932 | 橙色 Orange |
| 225933 | 红色 Red |
| 225934 | 蓝色 Blue |
| 225935 | 黄色 Yellow |

本标注公差参照GB/T14486

| 基本尺寸 | 0-3 | >3-6 | >6-10 | >10-14 | >14-18 | >18-24 | >24-30 | >30-40 | >40-50 | >50-65 | >65-80 | >80-100 | >100-120 | >120-140 |
|------|-------|-------|-------|--------|--------|--------|--------|--------|--------|--------|--------|---------|----------|----------|
| 公差 | ±0.08 | ±0.09 | ±0.10 | ±0.12 | ±0.14 | ±0.16 | ±0.18 | ±0.21 | ±0.24 | ±0.28 | ±0.32 | ±0.36 | ±0.41 | ±0.46 |

| | | | | |
|--|---------|----|------|------------------|
| | Rev. | 01 | Name | 22593X 4通道正面接线端子 |
| | 单位/Unit | mm | | |