

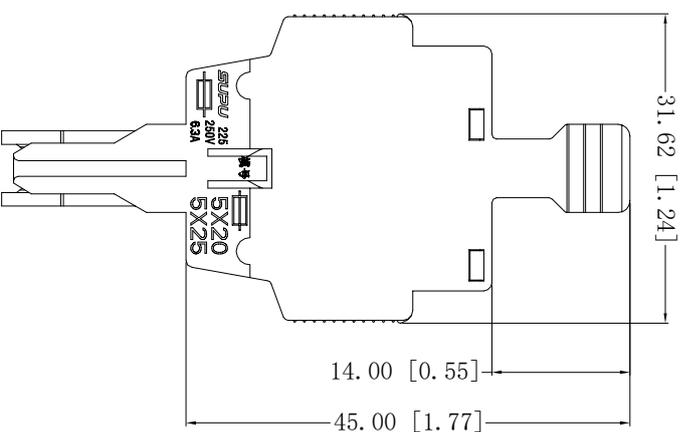


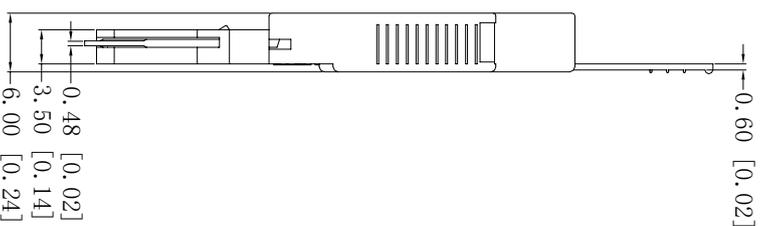

宁波速普电子有限公司

NINGBO SUPU ELECTRONICS.CO.,LTD

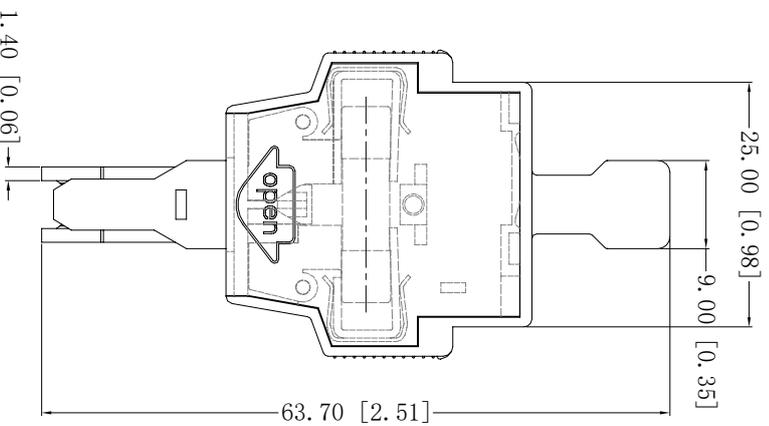

技术数据/ Technical Parameter	IEC	UL	CSA
额定电压/Rated voltage	800V	600V	600V
额定电流/Rated current	24 A	20A	25A
额定截面/Cross-section	0.2-2.5mm ²	AWG24-14	AWG24-14
额定冲击电压/Rated impulse withstand voltage	8 KV		
阻燃等级/Insulation material	UL94 V-0或V-2		
绝缘体材料/Insulating material	PA66		
载流体材料/Current carrier material	紫铜/Copper		
镀层/Plated	镀锡/Tip plated		

Order Info

PART NUMBER	COLOR
225231	Gray

NO.	Name	Material	Qua.	Remark
5	保险管/Protective tube		1	φ5.0x20.0
4	弹片/Spring	SUS301	2	
3	导电件/Pressure plate	紫铜/Copper	2	镀锡/Tip plated
2	盖板/End and intermediate	PA66	1	UL94 V-0或V-2
1	主体/Housing	PA66	1	UL94 V-0或V-2

存档路径:\工程部图档管理中心\产品\产品规格书\225231产品规格书

		Rev. A	
		Sheet 1 of 1	225231 保险盒
DWG.	郑龙飞	2012.7.16	225231 Fuse block
CHK.			
APP.			