


Spring-cage connection terminal block-
UJ5-1.5/2 × 2 - 421008





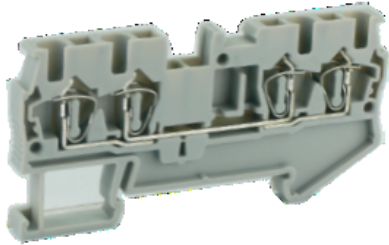


Spring-cage connection terminal block , rated voltage:500V , Max. operating current:17.5A, connection method:spring-cage connection, number of connection : 4 , crimping range : 0.14 mm² -1.5mm² , AWG : 28-14 , thickness:4.2 mm , height:35.2mm , color : grey , mounting type : TH35-7.5、 TH35-15

Product parameter

Parameter	Data
Packing unit (PCS)	110
NW per piece(g)	6.9
Layers	1
Number of connections	4
Rated cross section(mm ²)	1.5
Color	grey
Insulation material	PA
Flame retardant grade (UL94)	V0
Rated voltage(V)	500
Rated current(A)	17.5
Temperature of insulation material	-40 ~ +125
Wire feed	Above the terminal

Product certification

Parameter	Data
Certification logo	
Certification logo	
Certification logo	

Parameter	Data
	
Certification logo	CCS
Certification logo	IECEX
Certification logo	cRU[®] US
Certification logo	
Certification logo	
Certification logo	RoHS

Technical data

Parameter	Data
Connection Method	Spring-cage connection
Stripping length(mm)	10
Solid conductors(mm ²)	0.14-1.5
Solid conductors AWG	28-14
Stranded conductors(mm ²)	0.14-1.5
Stranded conductors AWG	28-14

Parameter	Data
Operating temperature ()	-40 ~ +105
Ambient temperature (storage/transportation) ()	-25 ~ +60
Relative humidity	30% ~ 90%
Connection in acc. with standard	IEC 60947-7-1

Dimension

Parameter	Data
Width(mm)	72
Thickness(mm)	4.2
Height(mm)	35.2