

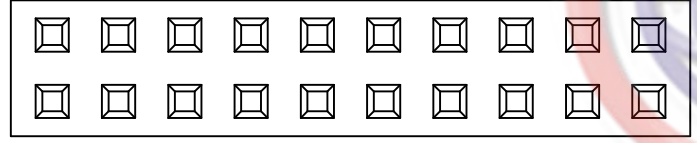


The information provided herein is from CONNFLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNFLY or its affiliates. Unauthorized use of the information herein, including but not limited to, reproduction, distribution, or disclosure to any third party, is strictly prohibited. CONNFLY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 10/15/07'		LJC 10/15/07'
B	TERMINAL CHANGE	JLZ 08/04/14'		LJC 08/04/14'
C	DRAWING UPDATE	JLZ 04/17/20'		

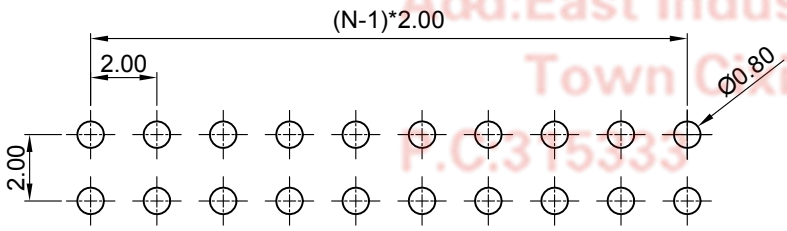

N=Number of contacts/2

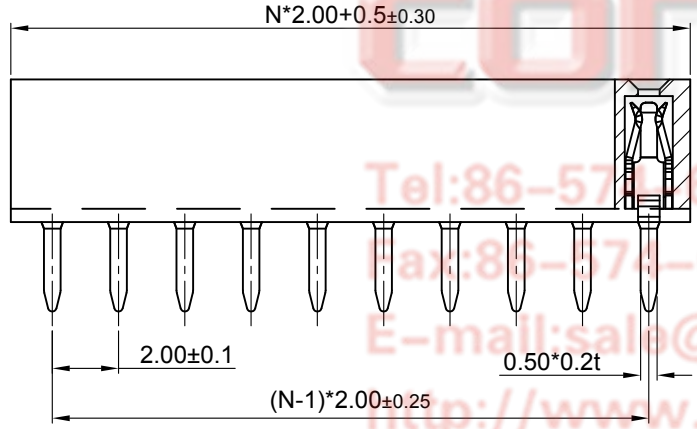

RECOMMEND PCB LAYOUT
(TOLERANCE=±0.05)

Notes:

Specifications:

- Contact Resistance: 20mΩ Max.
- Insulation Resistance: 1000MΩ Min.
- Dielectric Withstanding Voltage: 500V AC(rms) For 1 Minute.
- Current Rating:1.5A.
- Temperature: -40°C~+105°C.


Materials:

- Contact Material: Copper Alloy.
- Contact Plating: Gold Plating Over Nickel.
- Insulator Material: High temp,Black,UL94-V0.

Product Number Code:

DS1026-06 - X X X X X

- X X X X X
- Mounting type
V:V/T type
- Housing color
B:Black
- Contact plating
8: Full gold flash
- Connector type
S:Socket
- No.of contacts
2x2~2x40

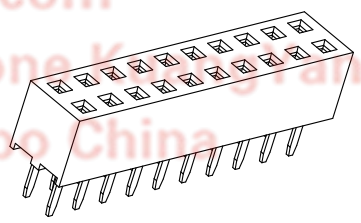

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE		1:1	SHEET 1 OF 1
DRAWING NO.		C-DS1026-06-XXXXX-C	

PROJECTION		TITLE	2.00mm Female Header
UNITS	mm		Double Row V/T Type
SHEET SIZE	A4	SERIES	DS1026-06 SERIES

晨翔电子有限公司
 CONNFLY CONNFLY ELECTRONIC CO. LTD