




宁波速普电子有限公司

NINGBO SUPU ELECTRONICS.CO.,LTD

产品规格书

Product Specification

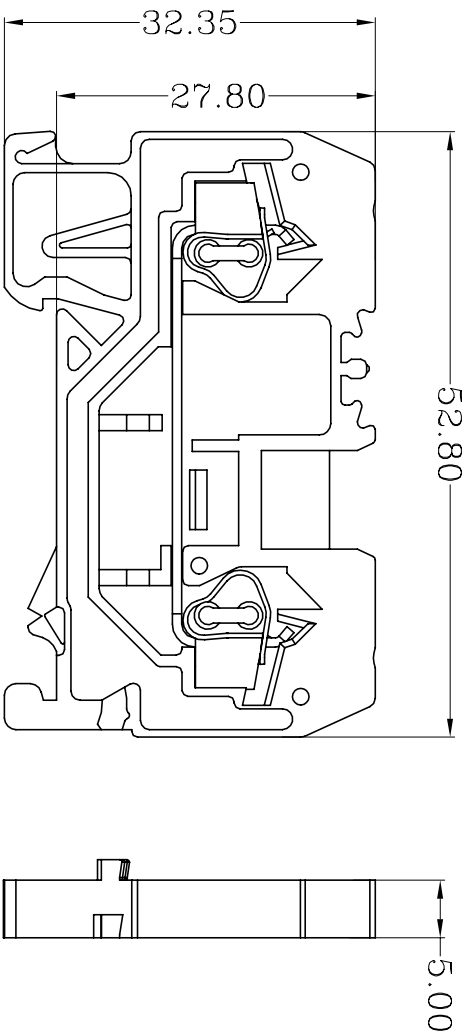

IEC 额定数据/IEC Rated data

接线范围/Wire range	0.2-2.5mm ²		
单股导线/Solid	0.2-2.5mm ²		
软导线/Stranded	0.2-2.5mm ²		
带端头软导线/Stranded with ferrules without plastic sleeve	0.2-1.5mm ²		
带预绝缘端头软导线/Stranded with ferrules with plastic sleeve	0.2-1.5mm ²		
剥线长度/Strip length	8-9mm		
额定电压/Rated voltage	800V		
额定电流/Rated current	24A		
额定脉冲耐受电压/Rated surge voltage	8KV		
污染等级/Pollution degree	3		
过电压类别/Surge voltage category	III		
UL 额定数据/UL Rated data	B	C	D
额定电流/Rated current	20A	20A	
额定电压/Rated voltage	600V	600V	
接线范围/Wire range	28-12AWG		

其他信息/Other information

塑件/Housing	PA66
触点材料/Contact	铜合金/Copper alloy
镀层/Coating	锡/Tin
阻燃等级/Flame retardant rating	V0
使用环境温度/Usage ambient temperature	-25°C - +70°C
储存及运输环境温度/Storage ambient temperature	-40°C - +85°C
导轨尺寸/rails Size	SP35X7.5/SP35X15

认证/Approval



订货信息 Order Info

订货号 PART NUMBER	颜色 COLOR
225921	灰色 Gray
225922	橙色 Orange
225923	红色 Red
225924	蓝色 Blue
225925	黄色 Yellow

本标准公差参照GB/T14486

基本尺寸 公差	0-3	>3-6	>6-10	>10-14	>14-18	>18-24	>24-30	>30-40	>40-50	>50-65	>65-80	>80-100	>100-120	>120-140
	±0.08	±0.09	±0.10	±0.12	±0.14	±0.16	±0.18	±0.21	±0.24	±0.28	±0.32	±0.36	±0.41	±0.46

	Rev.	01	Name	22592X 2通道正面接线端子
	单位/Unit	mm		