


Screw clamping terminal block - -  
UKJ-35JD- 011012



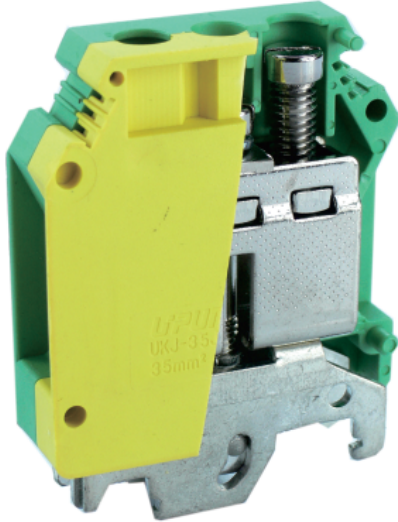

Screw clamping terminal block , connection method : screw connection , number of connections : 2 , crimping range : 0.75mm<sup>2</sup> -50 mm<sup>2</sup> , thickness:15mm , height:61mm , color : yellow-green , mounting type : TH35-7.5、 TH35-15、 G32-15、 G32-18

## Product parameter

Parameter	Data
Packing unit (PCS)	20
NW per piece(g)	1.79
Layers	1
Number of connections	2
Rated cross section(mm <sup>2</sup> )	50
Color	yellow-green
Insulation material	PA
Flame retardant grade ( UL94 )	V0
Temperature of insulation material	-40 ~ +125
Wire feed	Left and right side of the terminal

## Product certification

Parameter	Data
Certification logo	
Certification logo	

Parameter	Data
	
Certification logo	<b>CCS</b>
Certification logo	<b>RoHS</b>

## Technical data

Parameter	Data
Connection Method	Screw connection
Screw thread	M6
Stripping length(mm)	15
Tightening torque	3.2-3.7
Solid conductors(mm <sup>2</sup> )	0.75-50
Stranded conductors(mm <sup>2</sup> )	0.75-35
Operating temperature ( )	-40 ~ +105
Ambient temperature (storage/transportation) ( )	-25 ~ +60
Relative humidity	30% ~ 90%
Connection in acc. with standard	IEC 60947-7-1

## Dimension

Parameter	Data
Width(mm)	50.2
Thickness(mm)	15
Height(mm)	61