
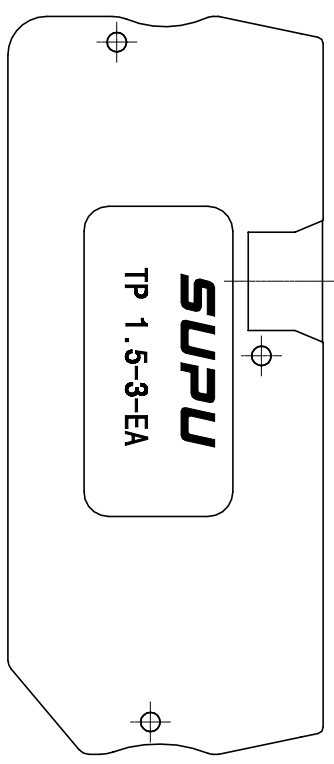

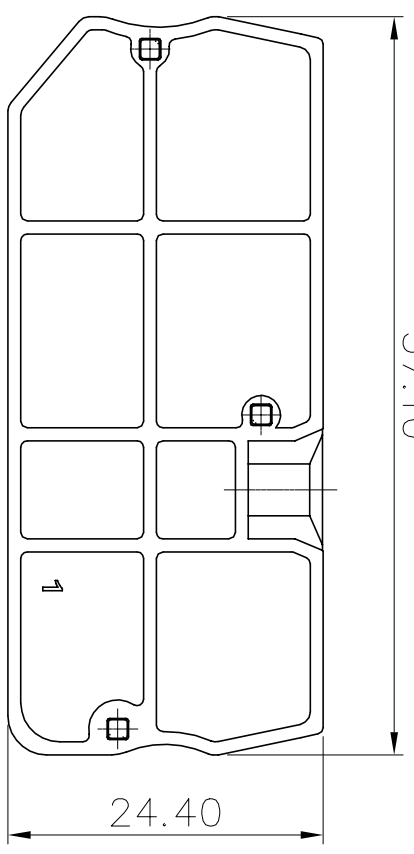


REVISION RECORD				
REV	ECN	DESCRIPTION	DRAFT	DATE
1	DCN00006231	图纸更新	董方正	2020/1/07

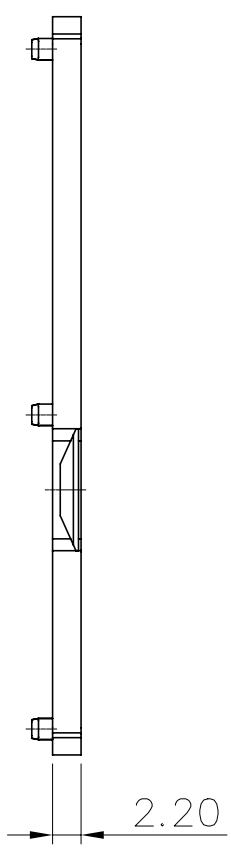

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited.

未经允许禁止传输、复制、编辑该文档，以及利用其内容进行交流

- NOTES:
- Material: Insulator P466 UL94 V-0
- General information:
- 1.Dimension shall be interpreted per ASME Y14.5-2009
 - 2.Operating temperature: -40°C~+105°C
 - 3.RoHS Compliance
 - 4.Undimensioned Tolerances:

Pitch	Range	In	Nominal	Dimension	Range	Over	Over	Over	Over	Over	Over
mm			in	mm		mm	mm	mm	mm	mm	mm
6	10	TO	30	TO	60	TO	100	TO	150	TO	0.1/10
10	10	TO	30	TO	60	TO	100	TO	150	TO	0.1/10
10	24	TO	30	TO	60	TO	100	TO	150	TO	0.1/10
6	10	TO	30	TO	60	TO	100	TO	150	TO	0.1/10
±0.15	±0.20	±0.30	±0.30	±0.30	±0.50	±0.70	±1.00	±1.00	±1.30	±2	±2

借通用件登记 Common Part	
原图号 Old Draw. No.	
底图总号 Assembly No.	

Order No.	Item	Design	Check	Process	Standard	Approve
TP1.5-3-XX-EA	TP1.5-3-XX-EA	11/14/19	11/14/19	-	-	11/14/19

名称	图号	材料	物料号	Item No.	物料号	Item No.
TP系列直插式弹簧	PM001414	NOTES	412200005	412200006	412200007	412200007
1.5mm ² 一进两出						
接线端子-端板						

HOW TO ORDER:

TP1.5-3-XX-EA

Series No. Color: GY: Grey BU: Blue OG: Orange

未注公差	表面
Tolerances	Surface
Table	VDI21
阶段标记	版本
Progress	Revision
M	1
重量	比例
Weight	Scale
/	1:1
mm	mm

第1页/共1页 1 of 1

SUPU 宁波舜普电子有限公司

NINGBO SUPU ELECTRONICS CO.,LTD.