
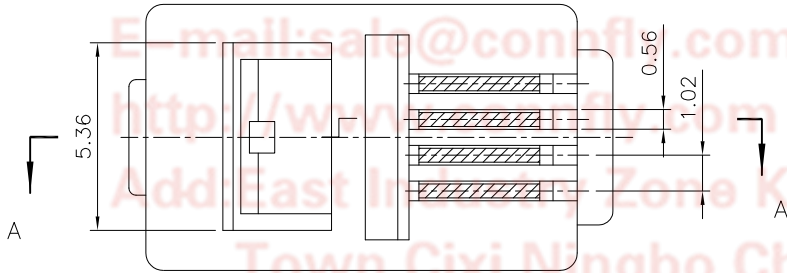
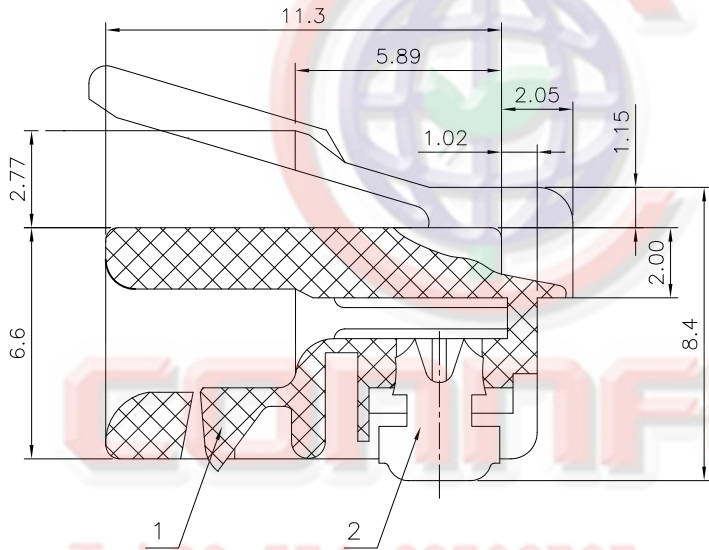


Dept	Qty	REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
DC	1	A	NEW RELEASE	LL 06/28/06'		LJC 06/28/06'
ED	1	B	DRAWING UPDATE	JLZ 08/14/18'		
IE	1					
ISO	1					
PD	1					
R&D	1					
SD	1					
QA	1					
QC	1					
QF	1					

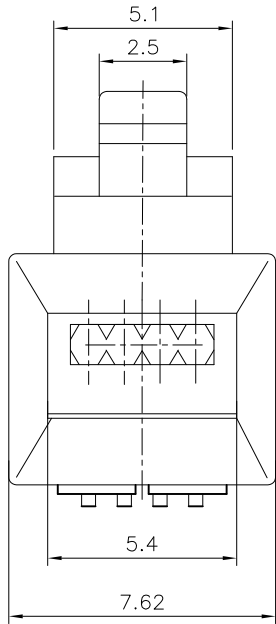

SPECIFICATION

- Insulation Resistance: 1000MΩ Min.
- Withstand Voltage: 500V AC/Minute.
- Durability: 600 Cycles Min.
- Contact resistance: 50mΩ max.
- Product Number Code:

DS1121 - X X X X

- Housing Color  
T: Transparent
- Contact Plating  
0: Gold Flash 15: 15u''Au  
3: 3u''Au 30: 30u''Au  
6: 6u''Au
- No. Of Contacts  
4: 4p4c
- Connector Type  
P: Plug
- Series No.  
DS1121

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

Tel: 86-574-63508787  
 Fax: 86-574-63510817  
 E-mail: sale@connfly.com  
 http://www.connfly.com  
 Add: East Industrial Zone KuangYan  
 Town Cixi Ningbo China  
 P.C: 315333

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION		TITLE	Plug 4P4C SQUARE TYPE
UNITS	mm	SHEET	1 OF 1
SHEET SIZE	A4	SERIES	DS1121 SERIES

(2)	BLADE	4	Copper alloy	GOLD PLATING	DRAWING TYPE	CUSTOMER	
(1)	HOUSING	1	PC	UL94 V-0 OR 94 V-2	SCALE	1:1	SHEET 1 OF 1
No.	PART NAME	Q'TY	MATERIAL	REMARK	DRAWING NO.	C-DS1121-XXXX-B	

晨翔电子有限公司  
**CONNFLY CONNELY ELECTRONIC CO. LTD**