


Technical Specifications

- Construction to EN 61 558, EN 60 950
- Creeping distance 8 mm min.
- UL listed materials
- Insulation material class E
- Two outputs for connection in parallel or in series

100 % piece inspection

- Inductance
- Turns ratio
- Winding direction
- Voltage resistance (50Hz/2s)

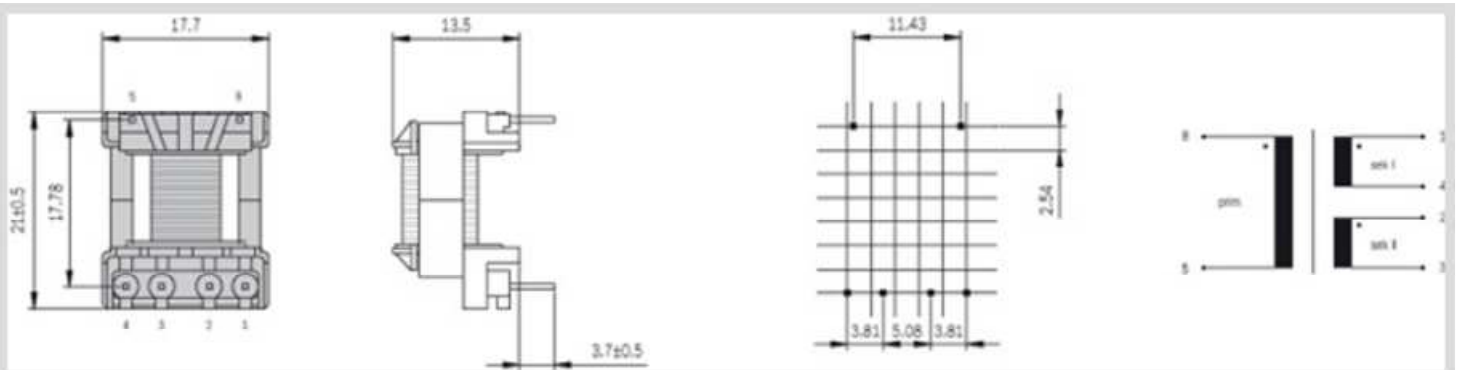

Dimensions without tolerance indications +/- 0,3
The right of alterations is reserved

TinySwitch-II® Product Family TNY 264

Order No.	Output W	Primary voltage [V]	Connecting pin prim.	Secondary voltage [V]	Current sec. [mA]	Connecting pin sek.
V 50100	5,0	85-265	5-8	2 x 3	2 x 830	1-4 / 2-3
V 50101	5,0	85-265	5-8	2 x 9	2 x 280	1-4 / 2-3
V 50102	5,0	85-265	5-8	2 x 12	2 x 210	1-4 / 2-3
V 50103	5,0	85-265	5-8	2 x 15	2 x 170	1-4 / 2-3

TinySwitch-III® Product Family TNY 276

Order No.	Output W	Primary voltage [V]	Connecting pin prim.	Secondary voltage [V]	Current sec. [mA]	Connecting pin sek.
V 50110	7,0	85-265	5-8	2 x 3	2 x 1170	1-4 / 2-3
V 50111	7,0	85-265	5-8	2 x 9	2 x 390	1-4 / 2-3
V 50112	7,0	85-265	5-8	2 x 12	2 x 290	1-4 / 2-3
V 50113	7,0	85-265	5-8	2 x 15	2 x 130	1-4 / 2-3