
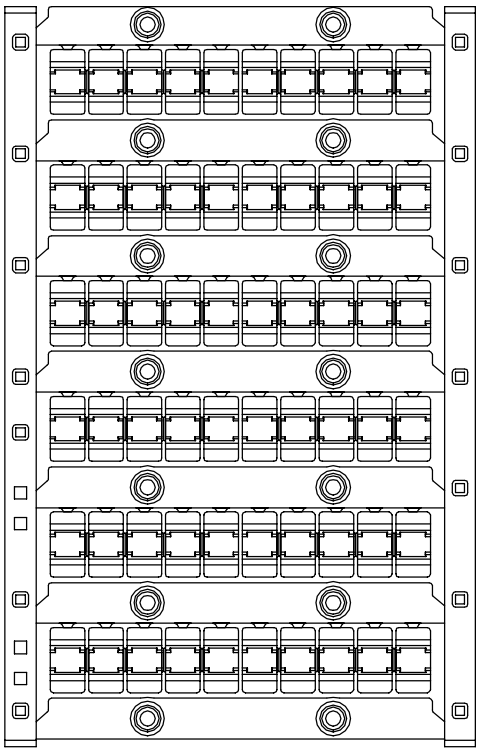


Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited.

未经允许禁止传输、复制、编辑该文档，以及利用其内容进行交流

REVISION RECORD			
REV	ECN	DESCRIPTION	DATE

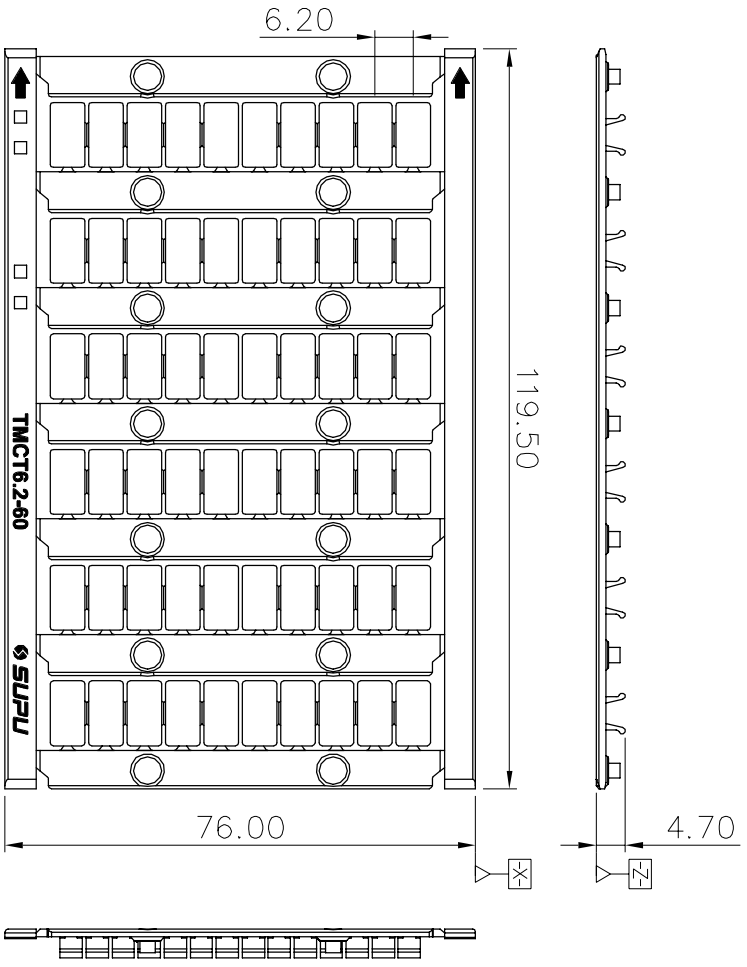

普通用作登记
Common Part

原图号
Old Draw. No.

底图总号
Assembly No.

- General information:
 1. Dimension shall be interpreted per ASME Y14.5-2009
 2. Pitch: 6.20mm
 3. Operating temperature: -40°C~+125°C
 4. RoHS Compliance
 5. Undimensioned Tolerances:

Pitch Range	In mm	Nominal Dimension	Range	mm
Over TO	6 TO 10	30 TO 60	Over TO	0.1/0
Over TO	10 TO 24	60 TO 100	Over TO	150
Over TO	24 TO 30	60 TO 100	Over TO	150
Over TO	30 TO 60	100 TO 150	Over TO	150
Over TO	60 TO 100	100 TO 150	Over TO	150
Over TO	100 TO 150	100 TO 150	Over TO	150

Insulator

PC

UL94 V-0

HOW TO ORDER:

TMCT 6.2-60
 Pitch
 Sereies Quantity

订货号 Order No.	TMCT6.2-60	名称 Name	TMCT6.2-60标记牌	未注公差 Tolerance	表面 Surface
项目 Item	签字 Signature	图号 Drawing No.	PRM003817	公差表 Tolerances Table	VDI21
设计 Design	cjs	材料 Material	NOTES	版本号 Revision Number	重量 Weight
审核 Check	lxw	物料号 Item No.	...	T0-1	比例 Scale
工艺 Process	-			第1页/共1页 1 of 1	14.87g
标准化 Unity	-				1:1
批准 Approve	xj				mm
	07/14/23				

NINGBO SUPU ELECTRONICS CO.,LTD.
SUPU 宁波普电子有限公司