
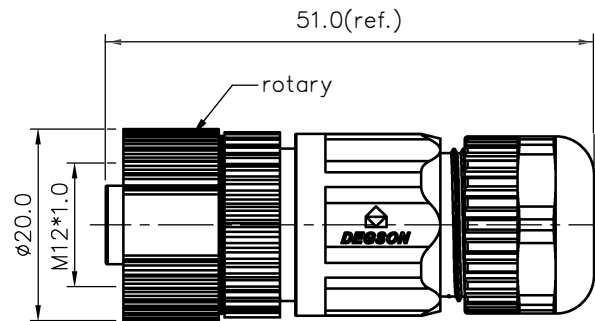


REVISION RECORD

| REV | ECN | DESCRIPTION | DRFT | DATE |
|-----|-----|-------------|------|------|
|-----|-----|-------------|------|------|



Plastic

NOTES:

- Rated voltage/current : 3pin A: 250V / 4A
4pin A: 250V / 4A
5pin A: 60V / 4A
6pin A: 30V / 2A
8pin A: 30V / 2A
5pin B: 60V / 4A
4pin D: 250V / 4A
- Withstanding voltage : 3,4pin A: AC1500V/1Min
5pin A: AC1120V/1Min
6,8pin A: AC500V/1Min
5pin B: AC1120V/1Min
4pin D: AC1500V/1Min
- Levels of protection: IP67
- Wire range :
3pin A: 24~20AWG/0.25~0.52mm²
4pin A: 24~20AWG/0.25~0.52mm²
5pin A: 24~20AWG/0.25~0.52mm²
6pin A: 24~22AWG/0.25~0.34mm²
8pin A: 24~22AWG/0.25~0.34mm²
5pin B: 24~20AWG/0.25~0.52mm²
4pin D: 24~20AWG/0.25~0.52mm²
- Cable OD: 4~8mm
- Wire connection mode: screw
- Operating temperature: -25°C~+105°C
- RoHS Compliance
- Tolerance : ±0.5mm



PW-M12X-XXP-FF-SL7001-00A(H)

Coding: A,B,D

Pin number: 03,04,05, 06,08

5pin B Coding

4pin D Coding



Pin Assignments Front View

Pin Assignments Front View






3pin A Coding

4pin A Coding

5pin A Coding

6pin A Coding

8pin A Coding



Pin Assignments Front View

Pin Assignments Front View

Pin Assignments Front View

Pin Assignments Front View

Pin Assignments Front View

| | | | | |
|------------------------|--------------------------------|------------------------------|---|----------------------|
| DETACHED LISTS | PART NO.: PWM12XXXPFSL700100AH | | 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD | |
| | APPD: | | NAME: PW-M12X-XXP-FF-SL7001-00A(H) | |
| | CHKD: | | TITLE: CUSTOMER DRAWING | |
| | DRFT: SQ 2019.05.17 | | REV: D0-1 | DATE: |
| THIRD ANGLE PROJECTION | | DRAWING NO.: XXXXXXXX-XX-CXX | | SHEET: 1/1 |
| | | | | DO NOT SCALE DRAWING |
| | | SCALE: 1:1 | | |