



DETAIL A (SCALE 40:1)

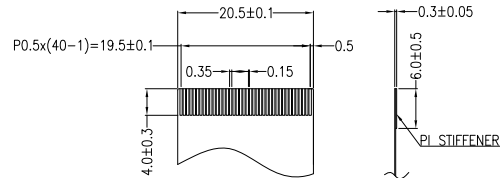

CONNECTOR MATED FPC/FFC STYLE (SCALE 2:1)

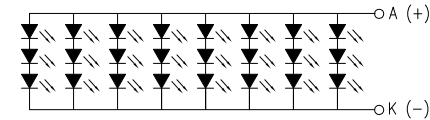

BACKLIGHT CIRCUIT DIAGRAM

PIN DESCRIPTION FOR LCM	
PIN	SYMBOL
1	GND
2	GND
3	NC
4	VCC
5	VCC
6	VCC
7	VCC
8	NC
9	DE
10	GND
11	GND
12	GND
13	B5
14	B4
15	B3
16	GND
17	B2
18	B1
19	B0
20	GND
21	G5
22	G4
23	G3
24	GND
25	G2
26	G1
27	G0
28	GND
29	R5
30	R4
31	R3
32	GND
33	R2
34	R1
35	R0
36	GND
37	GND
38	DCLK
39	GND
40	GND

NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY WHITE
2. OPERATING VOLTAGE: VCC=3.3V (TYP.)
3. VIEWING DIRECTION: 12:00 O'CLOCK
4. DRIVER IC: EK79713B + EK73202A
5. OPERATING TEMP.: -20°C ~ 70°C
6. STORAGE TEMP.: -30°C ~ 80°C
7. BACKLIGHT: 24-CHIP WHITE LED, If=160mA, Vf=8.4V~10.2V
8. SURFACE LUMINANCE: 500CD/M² (TYP.)
9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
10. THE SINGLE LAYER AREA OF FPC IS BENDABLE AND THE BENDING RADIUS MUST BE NOT LESS THAN 1.5MM
11. GENERAL TOLERANCE: ±0.3MM
12. ROHS COMPLIANT

MULTI-INNO TECHNOLOGY CO., LTD.			
DRAWN BY:	RITA	2022.02.21	MODULE P/N:
CHECKED BY:			MI0700A2T-38
APPROVED BY:			DESCRIPTION:
VERSION NO:	02		TFT MODULE

VER.	REVISED DESCRIPTION	REVISER	DATE
02	MODIFY THE DESIGN OF THE PLASTIC FRAME.	RITA	2022.03.09
01	FIRST ISSUE	RITA	2022.02.21