


Spring-cage connection terminal block- UJ5-2.5WM-421123





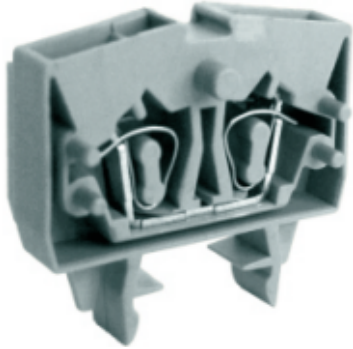

Terminal block, Rated voltage(V):800V, Rated current(A):24A,connection methods:spring-cage connection,number of connection:2, crimping range:0.08mm² -2.5mm² , AWG : 28-14 , thickness 6mm, height28.5mm, color:grey, mounting rail:TH35-7.5、 TH35-15.

Product parameter

Parameter	Data
Packing unit(pcs)	168
NW per piece(g)	3.9
Layers	1
Number of connections	1
Rated cross section(mm ²)	2.5
Color	grey
Insulation material	PA
Flame retardant grade	V0
Rated voltage(V)	800
Rated current(A)	24
Temperature of insulation material	-40 ~ +125
Wire feed	Above the terminal

Product certification

Parameter	Data
Certification logo	
Certification logo	
Certification logo	

Parameter	Data
	
Certification logo	

Technical data

Parameter	Data
Connection Method	Spring-cage connection
Stripping length(mm)	9
Solid conductors(mm ²)	0.08-2.5
Solid conductors AWG	28-14
Stranded conductors(mm ²)	0.08-2.5
Stranded conductors AWG	28-14
Operating temperature ()	-40 ~ +105
Ambient temperature (storage/transportation) ()	-25 ~ +55
Relative humidity	30% ~ 90%
Connection in acc. with standard	IEC 60947-7-1

Dimension

Parameter	Data
Width(mm)	48.5
Thickness(mm)	5
Height(mm)	35.2