


Push-in terminal block - UJ6-4 / 2 × 2 - 421473



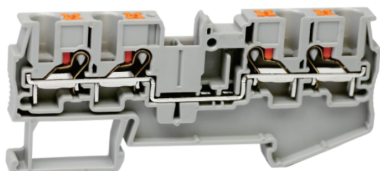

Push-in terminal block , rated voltage:800V , Max. operating current:32A, connection method : spring connection , number of connections : 2 , crimping range : 0.2mm<sup>2</sup> -6mm<sup>2</sup> , AWG : 16-10 , thickness:6.2mm , height: 35.2mm , color : grey , mounting type : TH35-7.5、 TH35-15

## Product parameter

Parameter	Data
Packing unit (PCS)	30
NW per piece(g)	11.7
Layers	1
Number of connections	2
Rated cross section(mm <sup>2</sup> )	4
Color	grey
Insulation material	PA
Flame retardant grade	V0
Rated voltage(V)	800
Rated current(A)	32
Temperature of insulation material	-40 ~ +125
Wire feed	Above the terminal

## Product certification

Parameter	Data
Certification logo	
Certification logo	
Certification logo	

Parameter	Data
	<b>RoHS</b>

## Technical data

Parameter	Data
Connection Method	Spring connection
Stripping length(mm)	13
Solid conductors(mm <sup>2</sup> )	0.2-6
Solid conductors AWG	26-10
Stranded conductors(mm <sup>2</sup> )	0.2-4
Stranded conductors AWG	26-12
Connection in acc. with standard	IEC 60947-7-1
Operating temperature ( )	-40 ~ +105
Ambient temperature (storage/transportation) ( )	-25 ~ +55
Relative humidity	30% ~ 90%

## Dimension

Parameter	Data
Width(mm)	81.8
Thickness(mm)	6.2
Height(mm)	35.2

## Business data

Parameter	Data
End cover -UJ6-4 / 2 × 2 G -422113-Packing unit (PCS)	100
End cover -UJ6-4 / 2 × 2 G -422113-NW per piece(g)	3.2
End cover -UJ6-4 / 2 × 2 G -422113-Width(mm)	81.8
End cover-UJ6-4 / 2 × 2 G -422113-Thickness(mm)	2.2
End cover-UJ6-4 / 2 × 2 G -422113-Height(mm)	29