


Category: 插拔式端子-插座/Plug-in terminal-plug

Product name: MC-PA3.5VXX-OG-WD

Product Description: 3.50mm , 160V , 10A CE

Product Picture

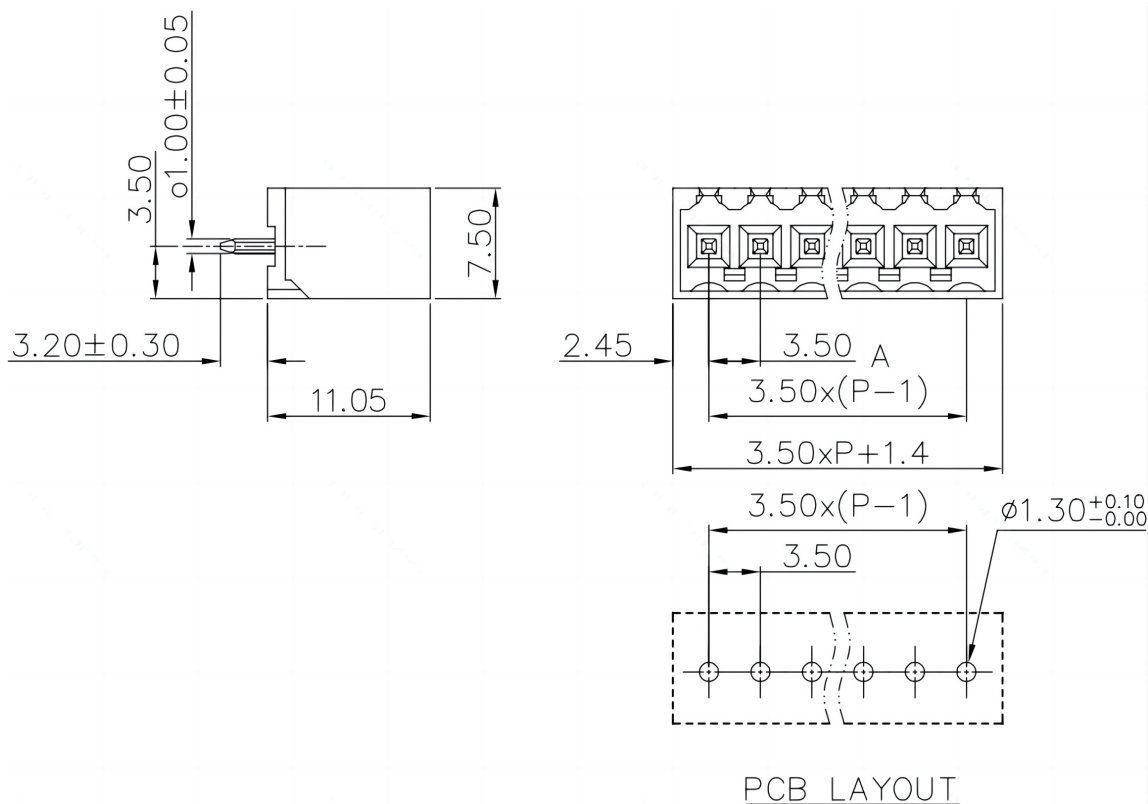

基本信息 /Basic Information

产品型号 SUPU ID	MC-PA3.5VXX-OG-WD
产品间距 Pitch	3.50mm
产品层数 Number of levels	1
产品位数 Number of connections	2P-24P
接线方式 Connection method	-
防护等级 Protection Level	IP20

工作温度 Work temperature	-40~+105°C
--------------------------	------------

## IEC数据 /IEC Data

额定电流 Rated Current	10A		
额定电压 Rated Voltage	160V		
过压类别 Overvoltage category	III	III	II
污染等级 Pollution degree	3	2	2
额定冲击电压 Rated impulse voltage	2.5KV	2.5KV	2.5KV
额定电压 Rated Voltage	160V	160V	320V
硬导线截面积 Conductor cross section solid	-		
柔性导线截面积 Conductor cross section flexible	-		
柔性导线截面积，带绝缘管套 Conductor cross section flexible,with furrule	-		
锁线螺钉规格 Locking screw Specification	-		
额定扭矩 Rated Torque	-		
固定螺钉规格 Fixed Screw Specification	-		
额定扭矩 Rated Torque	-		
剥线长度 Stripping length	-		

## UL数据 /UL Data

使用组别 Use group	B	C	D
额定电流 Rated Current	10A	-	10A
额定电压 Rated Voltage	300V	-	300V

---

额定接线容量  
Rated cross section -

---

## 材料信息 /Material Data

---

绝缘材料  
Insulation material PA66

---

绝缘材料组别  
Insulation material group I

---

阻燃等级，符合UL94  
Flame retardant grade, UL94 compliance V0

---

导体材料  
Contact material Copper alloy

---

导体表面镀层  
Surface characteristics Sn,Plated

---

## 产品认证 /Product Certification

---

认证图标  
Certificate 

---

UL证书号  
UL file No.

---

VDE证书号  
VDE No.

---

TUV证书号  
TUV No.

---

## 包装信息 /Packing Data

---

包装信息  
Packaging information 25pc

---

Ningbo Supu Electronics Co.,Ltd

Zip code: 315303

Fax: +86 574-63288170

E-mail : askme@supu.cn

Address: No. 625, Kandun Town Street, Cixi  
City, Zhejiang Province

Switchboard: +86 574-63288158

E-mail : askme@supu.cn

Service Hotline: 400-626-6336



Code

---

File date : 2024-10-23 18:06

Product Entry : 2023-09-28

The right to modify data belongs to  
Supu.