


IEC 额定数据/IEC Rated data



接线范围/Wire range	0.2-1.5mm ²		
单股导线/Solid	0.2-1.5mm ²		
软导线/Stranded	0.2-1.5mm ²		
带端头软导线/Stranded with ferrules without plastic sleeve	0.2-1.0mm ²		
带预绝缘端头软导线/Stranded with ferrules with plastic sleeve	0.2-1.0mm ²		
剥线长度/Strip length	8-9mm		
额定电压/Rated voltage	800V		
额定脉冲耐受电压/Rated surge voltage	8kV		
污染等级/Pollution degree	3		
过电压类别/Surge voltage category	III		
UL 额定数据/UL Rated data	B	C	D
额定电压/Rated voltage	600V	600V	
接线范围/Wire range	24-16AWG		
其他信息/Other information			
塑件/Housing	PA66		
触点材料/Contact	铜合金/Copper alloy		
镀层/Coating	锡/Tin		
阻燃等级/Flame retardant rating	V0		
使用环境温度/Usage ambient temperature	-25℃ - +70℃		
储存及运输环境温度/Storage ambient temperature	-40℃ - +85℃		
导轨尺寸/Rails Size	SP35X7.5/SP35X15		

认证/Approval

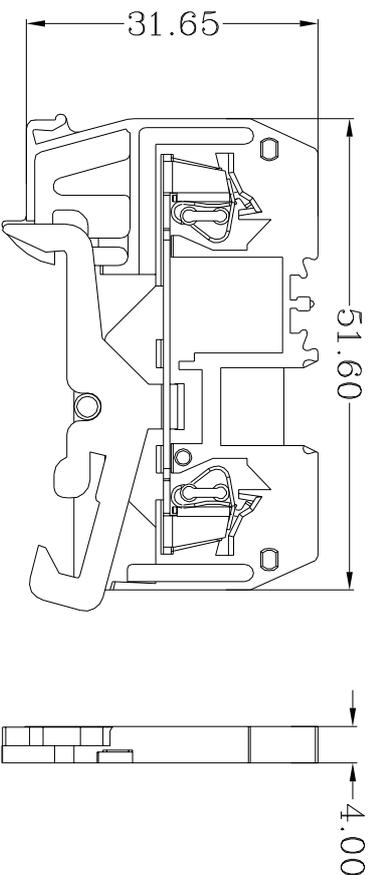

订货信息 Order Info

订货号	颜色	未标注公差参照GB/T14886														
ORDER NUMBER	COLOR	基本尺寸	0-3	3-6	>6-10	>10-14	>14-18	>18-24	>24-30	>30-40	>40-50	>50-65	>65-80	>80-100	>100-120	>120-140
215927	黄绿色 Green-yellow	公差	±0.08	±0.09	±0.10	±0.12	±0.14	±0.16	±0.18	±0.21	±0.24	±0.28	±0.32	±0.36	±0.41	±0.46

		Rev. 01	Name
单位/Unit	mm		215927 2通道正面接地端子 215927 2conductor through ground terminal blocks with of front-entry