
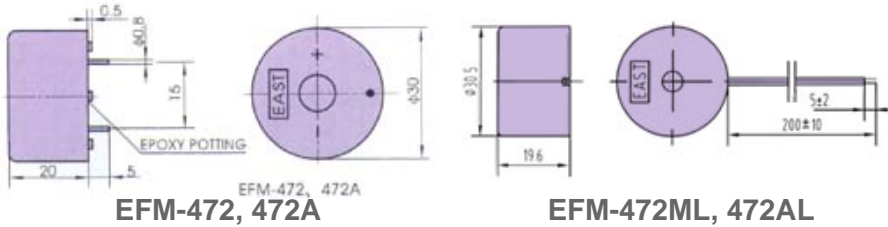


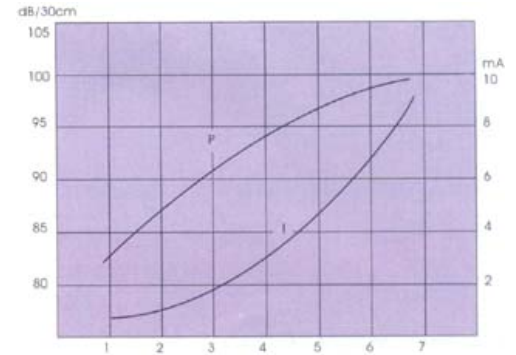

- EFM-472, EFM-472A, EFM-472ML, EFM-472AL


FEATURES:

- Low voltage
- high output
- Low current consumption

DIMENSIONS: (Unit: mm)

CHARACTERISTICS:

ELECTRICAL SPECIFICATIONS :

Model No.	EFM-472	EFM-472A	EFM-472ML	EFM-472AL
Min. Sound Pressure Level (dB)	90/3V _{DC} /30cm	90/12V _{DC} /100cm	85/12V _{DC} /30cm	90/12V _{DC} /100cm
Rated Voltage (V _{DC})	3	12	12	12
Operating Voltage (V _{DC})	2 ~ 5	3 ~ 20	3 ~ 16	3 ~ 20
Max. Consumption (mA)	5 /3V _{DC}	10 /12V _{DC}	15 /12V _{DC}	10 /12V _{DC}
Oscillating Frequency (kHz)	3.5 ± 0.5	3.5 ± 0.5	3.5 ± 0.5	3.5 ± 0.5
Tone Nature	Continuous	Continuous	Pulse 2~6HZ	Continuous
Operating Temperature (°C)	-20 ~ +70			
Weight (g)	8.9	8.9	10.1	9.7
Case Material/Colour	PC/Black			

PACKING INFORMATION :

Packing :	960 pcs per export carton	1000 pcs per export carton
Carton Size :	47 X 30.5 X 35 cm	47 X 30.5 X 25 cm
G. Weight :	10 kgs	14.5 kgs
N. Weight :	8.5 kgs	13.0 kgs