


Dept
Qty
DC 1
ED 1
IE 1
ISO 1
PD 1
R&D 1
SD 1
QA 1
QC 1
QE 1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

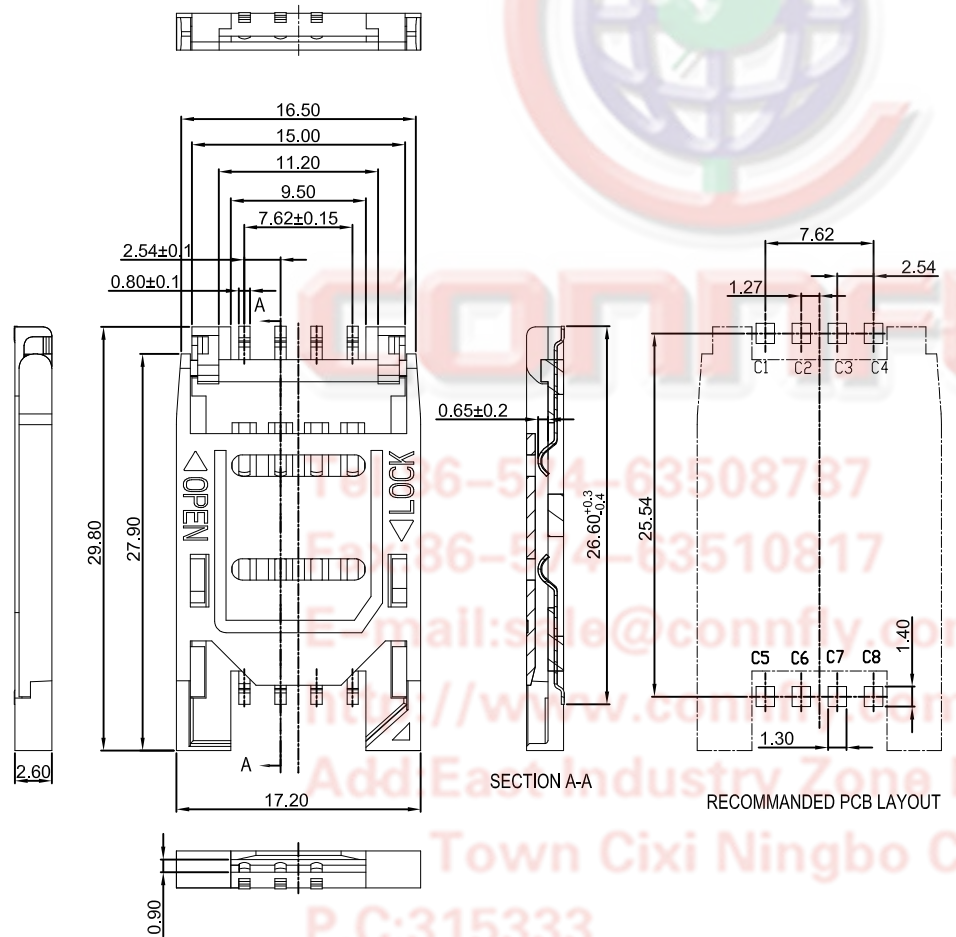

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 04/30/15'		LJC 04/30/15'
B	DRAWING UPDATE	JLZ 09/29/18'		

Notes:

- 1.Material:
 1.1. Housing: High Temperature LCP UL 94V-0 Color: Black.
 2.1. 2. Contacts: Copper Alloy. Selective Gold Flash.
 2.Specifications:
 2.1. Operate Temperature: -40° C~+85° C
 2.2. Insulation Resistance: 1000MΩ Min.
 2.3. Contact Resistance: 50mΩ max.
 2.4. Withstanding Voltage: 500V AC 1min.
 2.5. Voltage Rating: 30V AC/DC
 2.6. Current Rating: 0.5A
 3.Product Number Code:

DS1138-09 - XX X X X X X X

- Packing Type
R: Tape On Reel
B: Tube
- Post Support
X: W/O Post
- Housing color
B: Black
- Contact Plating
0: Selective 1u" gold
- Mounting type
S: SMT type
- Connector type
S: Socket
- No. of contacts
08:8pin

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5°		2.54mm SIM Card H=2.6mm
.X	±0.38	.X	±3°	mm	8 Positions SMT Type W/O Post
.XX	±0.25	.XX	±2°	A4	SERIES DS1138-09 SERIES
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNFLY CONNELY ELECTRONIC CO. LTD	
SCALE		1:1	SHEET 1 OF 1		
DRAWING NO.		C-DS1138-09-XXXXXXX-B			