
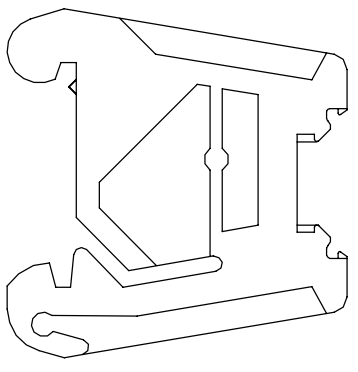

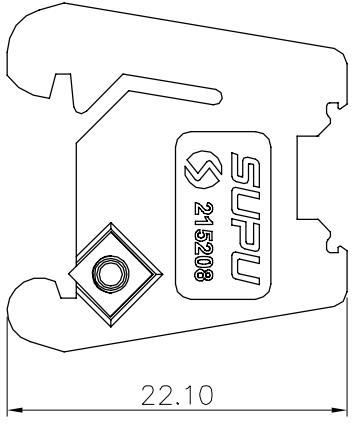


Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited.

未经允许禁止传输、复制、编辑该文档，以及利用其内容进行交流

REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE



Material:
Insulator PA66 UL94 V-0

General information:
1.Dimension shall be interpreted per ASME Y14.5-2009
2.Operating temperature: -40°C~+105°C
3.RoHS Compliance
4.Undimensioned Tolerances:

Pitch Range in mm	Nominal Dimension Range			
	Over	TO	TO	Over
6	10	10	30	60
10	10	24	30	60
10	10	30	60	100
10	10	30	60	150
±0.15	±0.20	±0.30	±0.50	±0.70 ±1.00 ±1.30

HOW TO ORDER:
21520 8
Series No. _____
Color: GY: Grey

订货号 Order No.	215208	名称 Name	215208-固定器-SPD15卡式 T=5.2	未注公差 Tolerance	表面 Surface
项目 Item	签字 Signature	图号 Drawing No.	PRM...	版本号 Revision Number	VDI21
设计 Design	CJS	材料 Material	Notes	重量 Weight	/
审核 Check	CW	物料号 Item No.		比例 Scale	1:1
工艺 Process	-				
标准化 Unity	-				
批准 Approve	LWL				
	05/09/19"				

第1页/共1页 1 of 1
NINGBO SUPU ELECTRONICS CO., LTD.
宁波速普电子有限公司